

Radio Communication

March 1988



1913 1988

**NO
DEPOSIT
FINANCE**

Just What is AMCOMM's Painless, Payless Credit?

Read Below

Just think – you can now take delivery of the latest state-of-the-art transceiver/receiver, or many other items from our stock with no deposit! **Yes, that's right NO DEPOSIT!** We at AMCOMM want you to enjoy the very best in Amateur Radio, but in a way that you can afford. We've now eliminated the deposit and you have 2 or even three years to pay.* This is AMCOMM's painless, payless credit, really working for you – another dream deal from Amcomm – where a good deal more costs a good deal less!

No snags, no catches, no hidden extras, nothing added. Just take a look at some examples:

FT 757 (Compact HF Multimode TCVR)

FRG 8800 (High quality gen. cov. RCVR)

FT 767 GX (HF/VHF/UHF All Mode TCVR)

FT 23 R (with FNB 10) (2m micro handy)

FT 727 R (Dual band handy)

IC 735 (Compact HF Multimode)

IC 751 A (HF Transceiver Multimode)

IC 275 E (2m base 25W)

ICµ2 E (2m mini handy)

IC 290 D (2m Multimode)

*subject to status

PLUS... MANY MORE...

24 payments of **£49.40** per month

24 payments of **£32.58** per month

24 payments of **£79.04** per month

24 payments of **£12.56** per month

24 payments of **£21.64** per month

24 payments of **£48.38** per month

24 payments of **£74.67** per month

24 payments of **£52.98** per month

24 payments of **£12.18** per month

24 payments of **£27.59** per month



SUPER H.P. TERMS AND TRADE-IN SERVICE
CASH IN NOW, ON OUR HUGE BUYING POWER! ENORMOUS STOCKS
WHERE A GOOD DEAL MORE COSTS A GOOD DEAL LESS!

373 Uxbridge Road, London W3 9RN, Tel: 01-992 5765

Showroom and Shop opening hours 9.30-5.00pm – Closed Mondays
Fax: 01-861 2591 Telex: 24263



E & OE

Amcomm
— of London —

MARCH 1988

VOLUME 64

No 3

Radio Communication

EDITOR-IN-CHIEF

A W Hutchinson

Editorial assistant

A C Burrows

Draughtsman

D E Cole

Editorial secretary

Mrs M L Brimson

All contributions and correspondence concerning the content of *Radio Communication* should be addressed to:

The Editor
Radio Communication
Lambda House
Cranborne Road
Potters Bar
Herts EN6 3JE

Correspondence concerning the distribution of the journal, and all other Society matters should be addressed to:

RSGB Headquarters,
Lambda House,
Cranborne Road,
Potters Bar,
Herts EN6 3JE

Tel 0707 59015

Fax 0707 45105

Business hours: 1000 to 1600

Headline News

Tel 0707 59312 for a recording of the latest amateur radio news

Incoming news for GB2RS: Tel 0707 59260

Computer contact (1,200/75 bauds)

RSGB Data Box 0707 52242

RSGB on Prestel page 8107

ADVERTISING

Advertisements, other than Members' Ads, should be sent to:


M J Hawkins, G3ZNI,
RSGB Advertisement Agent
PO Box 599,
Cobham,
Surrey KT11 2QE

Tel 037 284 3955

Fax 037 284 2863

FRONT COVER

An RSGB stand at Radiolympia in the 'thirties



36,053 copies per
issue average
circulation in 1987

CONTENTS

- 167 From the secretary's office
- 168 Members' Mailbag
- 169 RSGB National VHF Convention
- 170 A design for a desk microphone with automatic gain control
— D Maciver, G1SJU
- 172 Dxing with dipoles — D J Reynolds, G3ZPF
- 176 Making printed circuit boards — a different view
— John Case, GW4HWR
- 179 Technical feedback
- 180 Technical Topics — Pat Hawker, G3VA
- 187 *News Bulletin* — John Nelson, GW4FRX, and David Gough, G6EFQ
- 207 News & Views
- 207 HF — John Allaway, G3FKM
- 210 HF F-layer Propagation Predictions
- 211 VHF/UHF — Ken Willis, G8VR
- 213 SWL — Bob Treacher, BR532525
- 214 Microwaves — Mike Dixon, G3PFR
- 215 Satellites — Bob Phillips, G4IQQ
- 216 Data Comms — Ian Wade, G3NRW
- 217 Contest News
- 218 Contests Calendar

Technical articles on subjects of amateur interest are always welcome and should be sent to: The Editor, *Radio Communication*, Lambda House, Cranborne Road, Potters Bar, Herts EN6 3JE.

All articles received are reviewed for technical merit by the RSGB Technical & Publications Committee, or an acknowledged expert on the subject, before acceptance. Payment at high competitive rates will be made for all articles published.

A contribution will only be considered for publication on the understanding that the person submitting it is the original author and owner of the whole copyright, and that on acceptance for publication such copyright will become the property of the RSGB in consideration of the above-mentioned payment by the RSGB to the contributor.

The editor will be pleased to send intending authors a manuscript preparation guide and to give any other advice and assistance requested.

Radio Communication is published by the Radio Society of Great Britain as its official journal on the last Friday of each month and is sent free and post paid to all members of the Society

Closing date for contributions
unless otherwise notified:
five weeks before publication date

©RADIO SOCIETY OF
GREAT BRITAIN 1988

The R-5000 from Kenwood



The R5000 is a new general coverage receiver. It offers the dedicated short wave listener and radio amateur a receiver that will match the performance of the best transceivers available today.

The R5000's frequency range is continuous from 100 kHz to 30 MHz and its modes of operation are USB, LSB, CW, AM, FM and FSK. An optional VHF converter (VC20) extends the frequency range to include 108 to 174 MHz.

The R5000 uses 2SK 125 junction-type FETs in the high sensitivity direct balanced first mixer resulting in outstanding two signal characteristics and a substantially improved noise floor level.

Operating from either 12 V DC or 240 V AC the receiver can be used both in the home or whilst out in car, caravan or boat.

The receiver has two rates of tuning for each mode selected by a front panel switch. The frequency increments for SSB/CW/FSK are 10 Hz and 100 Hz, for AM 100 Hz and 1 kHz and for FM 2.5 kHz and 5 kHz.

Both low (50 ohms) and high (500 ohms) aerial connections are provided on the rear panel of the R5000. The required aerial can be selected by means of a front panel switch. Information on which aerial to be used with a stored frequency can also be held in memory.

The R5000 has 100 memory channels which store frequency, mode and which of the two aerial connections has been selected. Information is easily transferred from one VFO to the

other, from memory to VFO and in order to quickly access your favourite station, from VFO to any of the memories. Both memory scan and frequency scan (between frequencies in memories 8 and 9) are included in the receiver. Halt on an occupied channel whilst scanning can either be timed or until the signal drops. The entire one hundred memories can also be quickly scrolled to check the data held and to find the location of an empty channel.

To enhance reception, IF shift and a tunable notch filter are part of the R5000 receiver. Filter selection according to mode is automatic when the front panel selectivity switch is set to AUTO. This selection can, of course, be overridden. Additionally, the introduction of optional SSB and CW filters (YK88SN for SSB and either YK88C or YK88CN for CW) will improve the already excellent signal to noise ratio and selectivity. The optional YK88A-1 AM filter will improve the shape factor and enhance reception even further.

The R5000 general coverage receiver also has keyboard frequency entry, dual mode noise blanker, two 24 hour clocks with timer, option VS1 voice synthesizer and CW tone mode indication for the blind operator, a large 100 mm diameter top mounted speaker, switchable AGC (fast or slow), RF attenuation (10, 20 or 30 dB steps) and a F.LOCK switch which protects against frequency shift if the VFO knob is accidentally moved.

R5000 General Coverage Receiver £895.00 (corr. £7.00)

All prices subject to confirmation

LOWE ELECTRONICS LTD.

Chesterfield Road, Matlock, Derbyshire DE4 5LE

Telephone 0629 580800 (4 lines)



send £1 for complete mail order catalogue.

station accessories

TL-922 HF amateur band linear amplifier


The TL-922 is a class AB2 grounded grid linear amplifier using two high performance EIMAC 3-500Z tubes. It covers 160 to 10 metres for SSB, CW and RTTY modes of operation. Engineering perfection, those who have seen a TL-922 will know what I mean. It is one of the few items of amateur radio equipment which is truly hand built by a specialist engineer.



TL-922 inc tubes... £1495.00 inc VAT, carriage £8.00

SM-220 station monitor

Based on a wide frequency range oscilloscope, the SM-220 station monitor features in combination with a built-in two-tone generator, a wide variety of waveform observing capabilities. The SM-220 aids efficient station operation as it monitors transmitted waveforms and it also serves as a sensitive wide frequency range oscilloscope for various adjustments and experiments. When fitted with the optional BS-8 panoramic display and connected to one of the following transceivers (TS-940, TS-830, TS-180, TS-820 series) signal conditions in the vicinity of the receive frequency can be seen over a 40 or 200kHz range.



SM-220... £343.36 inc VAT, carriage £8.00
BS-8... £27.00 inc VAT, carriage £1.50



TR-751E

Amazing - we haven't mentioned Kenwood's most popular transceiver for about a year. Maybe it's because it sells so well on its reputation, but that's no reason for keeping it off the pages of RadCom.

What is Kenwood's most popular transceiver? It's the TR-751E (fanfare of muted trumpets). The TR-751E is THE definitive 2 metre multimode, and carries on the tradition started by the TR-9000 many years ago and maintained by the TR-9130.

If you want a rig that does it all, the TR-751E is it. Full 2 metre coverage, 25 watts, super receiver, use as a mobile or base station, it's all there. I'll make my usual comment that in order to appreciate all it can do, you should see a fully descriptive brochure, and that's available for the cost of a first class stamp. Better still, if you send us £1, we will return the full Kenwood colour catalogue together with all sorts of other useful reading.

Finally, for those who actually read the advertising, we have a new pair of micro handheld transceivers from Kenwood. Just ask.

TR-751E... £599.00 inc VAT, carriage £8.00

send for the
KENWOOD
detailed leaflet

amateur band plus general coverage transceivers

TS-940S HF transceiver with general coverage receiver


Top of the range, the TS-940S has every operating feature that the discerning HF operator needs. Amateur bands from 160 to 10 metres plus a general coverage receiver tuning from 150 kHz to 30 MHz. Modes of operation are USB, LSB, CW, AM, FSK, and FM. Forty memory channels, each effectively separate VFO and easy keyboard frequency entry make operation and ownership of the TS-940S a pleasure.



TS-940S... £1995.00 inc VAT, carriage £8.00

TS-930S HF transceiver with general coverage receiver


Much has been said and written about the TS-930S and it now has a place high in the affection of radio amateurs. Modes of operation are USB, LSB, CW, AM and FSK. Providing full coverage of the amateur bands from 160 to 10 metres and including a general coverage receiver tuning from 150 kHz to 30 MHz, the KENWOOD TS-930S is the ideal rig for today's crowded bands.

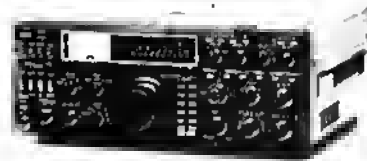

TS-930S... £1695.00 inc VAT, carriage £8.00

TS-440S HF transceiver with general coverage receiver

A step forward in compact HF equipment, the TS-440S covers the amateur bands from 160 to 10 metres and is also a general coverage receiver tuning from 100 kHz to 30 MHz. It has keyboard frequency entry, full and semi break-in on CW, one hundred memories and provision for latching an internal ATU. Modes of operation are USB, LSB, AM, FM and AFSK.

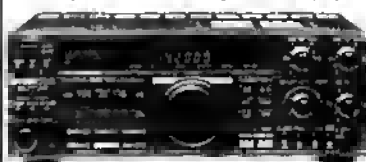

TS-440S... £1138.81 inc VAT, carriage £8.00

TS-140S HF amateur bands transceiver

Kenwood common sense. The TS-140S shows the way to go in balancing performance, operating features, and ease of use; all at an attractive price. All mode amateur band transmit with an excellent general coverage receiver. Full break in CW is provided for the real operators, but so is FM for idle chatting on ten metres (although why one would use FM in preference to SSB or CW, I cannot imagine). Every TS-140S we can obtain is instantly sold. Ask around and you will find out why.

TS-140S... £862.00 (carr £8)



LOWE ELECTRONICS LTD.

Chesterfield Road, Matlock, Derbyshire DE4 5LE
Telephone 0629 580800 (4 lines)



HF 125

Why did we design and produce the HF 125 receiver? Simply to provide the keen short wave listener with a receiver which offered not only all the facilities he or she needed in an HF receiver, but to give at the same time a level of performance which would cope easily with HF conditions likely to be encountered in Europe.

You all know the problems, high power broadcast stations pounding in at night, blotting out the weak signals you wanted to hear – and many of the unwanted signals were generated in your receiver itself. That we succeeded in designing a receiver which could solve the listening difficulties is obvious from comments from reviewers, but we also did it at an attractive price.

The HF 125 performance ranks equal to or better than imported receivers at twice its price, and its success stretches around the world.

So what did the reviewers say. I'll give you a few comments, but for the full story why not send a stamped addressed envelope marked "HF 125" and we will return a fully descriptive brochure with all the review comments included.

"I tuned straight to the 40 metre amateur band to see how it stood up to the balloning from high powered propaganda broadcasters when attempting to resolve relatively weak amateurs striving to get contacts. The simple answer was, no problem." Chris Lorek.

"After an hour, drift was less than 50Hz in each instance. This is comparable with receivers in much higher price classes." World Radio and TV Handbook.

"I have no doubt that the Lowe HF 125 represents extremely good value for money, and the performance far exceeds so much of its competition, including some receivers costing rather more." Angus McKenzie.

"It's refreshing to find a receiver that does exactly what it claims." World Radio and TV Handbook.

The HF125 costs £325 including VAT. Need I say more?

packet radio from KANTRONICS

When I first heard of packet radio, I said "What?", and that is the reaction of many radio amateurs. However, I never expected it to be so much fun, and judging by the demand and the queue to get at our demonstration station here at Matlock, a lot of other people are also finding it truly fascinating.

There are several companies offering ready made packet systems, and the descriptions are usually full of terms you don't understand (including some of our own ads in the past). What for example is "enhanced generic command structure"? Sounds very much like something taught at Sandhurst or West Point. From the equipment available, we chose to represent Kantronics, because their units are sheer delight to see, to use, and to enjoy. For full information on this most interesting aspect of our hobby, just send a couple of first class stamps and ask for "Kantronics".

Prices range from £159 to £298, and I know I haven't told you what packet radio will do – the experts among you already know; if you are like me, a novice, why not send for the info...



DAIWA meters.

CN410M... 3.5 to 150 MHz, forward 15/150 W, reflected 5/50 W, SO239 connectors... £61.72 inc vat, carriage £1.50.

CN460M... 140 to 450 MHz, forward 15/150 W, reflected 5/50 W, SO239 connectors... £65.40 inc vat, carriage £1.50.

NS448 with remote head... 900 to 1300 MHz, forward 5/60 W, reflected 1.6/6.6 W, N type connections... £66.60 inc vat, carriage £2.50.

NS660P with switchable meter reading (average, normal PEP and hold PEP) and provision for optional remote head (U66V), 1.8 to 150 MHz,

forward 15/150/1500 W, SO239 connectors... £115.00 inc vat, carriage £2.50.

U66V remote head, 140/925 MHz, max 300 W, N type connectors... £55.27 inc vat, carriage £1.50.

SC20 extension cable for U66V, approx 20 metres long... £29.21 inc VAT, carriage £1.50.

CN410M

NS660P

NS448

CN460M

LOWE SHOPS

Our Head Office is at Matlock, but we have conveniently placed branches around the country. Each branch is run by a manager who is an active radio amateur and also keen to help you. He normally stocks everything in our extensive range and can demonstrate all major items of radio equipment to you. Note though that all mail orders must be sent to Head Office at Matlock.

In Glasgow, at 4/5 Queen Margaret Rd., (off Queen Margaret Drive). Tel. 041 945 2626.

In Darlington, at 56 North Road. Tel. 0325 496121.

In Cambridge, at 162 High St., Chesterton. Tel. 0223 311230.

In Cardiff, at South Wales Carpets, Clifton St. Tel. 0222 464154.

In London, at 223 Field End Rd., Eastcote, Middx. Tel. 01 429 3258.

In Bournemouth, at 27 Gillam Rd., Northbourne. Tel. 0202 577760.

Branches are normally open from Tuesday to Saturday inclusive, with lunch breaks to suit local conditions. If in doubt, just telephone your nearest branch.

LOWE ELECTRONICS LTD.

Chesterfield Road, Matlock, Derbyshire DE4 5LE

Telephone 0629 580800 (4 lines)



HRS ELECTRONICS LTD

021-771 2525

COMMUNICATIONS
DIVISION

BUTTERNUT ANTENNAS

Verticals

HF6V	6 Band 26ft high	159.00
HF2V	80/40M 32ft high	142.00
A18-24	HF6V 17/12M add on kit	30.99
STR11	HF6V Stub Tuned Radial Kit	33.49
MPS	HF6V Mounting Post Sleeve	5.99
20MRK	HF2V 20M add-on Kit	33.49
30MRK	HF2V 30M add-on Kit	33.49
TLK	HF2V Top-Loading Kit	13.84
RMK-11	HF2/6V Roof Mounting Kit (includes radials and tripod tower)	51.49
T2	Tripod Tower 2ft Roof Mounting	14.79
TBR-160SHF2/6V	160M add-on Kit	53.99
SC3000	30-512 MHz Scanner Ant	63.99
2MCV	2M Colinear 9.8ft 3db gain	53.99
2MCV-5	2M Colinear 15.75ft 5db gain	63.99

Compact HF Beam

HF5B	10-12-15-20M Butterfly (wingspan 12'6" Boom 6')	235.00
------	----------------------------------------------------	--------

CUSHCRAFT ANTENNAS

Multiband Beams

A3	3 Element 20-15-10M	262.99
A3SK	Stainless Steel Hardware Kit for A3	35.51
A4	4 Element 20-15-10M	353.35
A4SK	Stainless Steel Hardware Kit for A4	42.64
A743	Add-on Kit for A3 giving 40M or 30M	90.39
A744	Add-on Kit for A4 giving 40M or 30M	90.39

Monoband Beams

10-3CD	3el 10M	115.04
10-4CD	4el 10M	131.48
15-3CD	3el 15M	139.70
15-4CD	4el 15M	147.92
20-3CD	3el 20M	238.31
20-4CD	4el 20M	328.71
40-2CD	2el 40M	349.95

Verticals

AP8	8 Band 25ft high	164.35
AV5	5 Band 25ft high	123.26

VHF Antennas

124WB	4el 2M w/Band Beam	36.98
ARX450B	435-450MHz Vertical	42.73
ARX2B	134-164MHz Vertical	42.95
4218XL	18EL 2M Boomer	106.59
215WB	15EL 2M Boomer	85.26

Lightening Arrestors

LAC1	PL259 to SO239	6.58
LAC2	PL259 to PL259	6.58
LAC4H	Lightning Arrestors 2KW PL 259 to PL 259	22.73

MFJ ENTERPRISES

Antenna Tuners

MFJ989B	3KW Roller Inductor built-in dummy load. Cross needle SWR/PWR meter, 6 way antenna switch and built-in balun	368.16
---------	-----------------------------------------------------------------------------------------------------------------------	--------

MFJ962B	1.5KW Versatuner MK III. Cross Needle SWR/PWR Meter, Built-in balun	241.95
---------	---------------------------------------------------------------------------	--------

MFJ949C	300W Deluxe Versatuner built-in dummy load, cross needle SWR/PWR meter, 6-way switch and balun	157.75
---------	---------------------------------------------------------------------------------------------------------	--------

MFJ941D	300W Built-in SWR/PWR Meter, 6 way switch and balun	105.13
---------	--------------------------------------------------------	--------

MFJ901B	200W Versatuner	63.07
MFJ16010	Random Wire Tuner	42.02

MFJ1701	6-way Antenna Switch 2KW SSB	30.72
MFJ910	Mobile Antenna Matcher	20.42

Accessories

MFJ250	1KW Dummy Load (Less Oil)	50.66
MFJ260	300W Dummy Load	28.35
MFJ1274	Packel Radio Terminal (with tuning indicator)	203.73
MFJ1224	RTTY/ASCII/AMTOR/CW computer interface kit 20, THDoc, appl, CSM 4	111.82

MFJ1225	Universal Receiver only version of above	78.25
---------	---------------------------------------------	-------

MFJ752C	Dual Tunable SSB/CW Filter with peak/North	104.16
---------	-----------------------------------------------	--------

MFJ723	CW Filter Switchable 80 to 180Hz	52.04
--------	-------------------------------------	-------

Noise Bridges

MFJ204B	Built-in RF Generator up to 30MHz and 500 ohms impedance	84.12
---------	-------------------------------------------------------------	-------

MFJ202B	RF Noise Bridge measures resonance and reactance to 100MHz	63.10
---------	------------------------------------------------------------------	-------

Wattmeters/SWR Meters

MFJ815	2KW Cross Needle SWR/PWR Meter	57.32
--------	-----------------------------------	-------

MFJ840	2M Power Meter 5W, 50 Ohms Load built-in (BNC Connector)	20.97
--------	-------------------------------------------------------------	-------

MFJ841	2M In Line 5W BNC Conn. Switchable SWR/PWR	42.02
--------	-----------------------------------------------	-------

HY-GAIN MULTIBAND BEAMS

TH7DX	7 Element 20-15-10M	669.00
-------	---------------------	--------

TH5 Mk2	5 Element 20-15-10 M	575.00
---------	----------------------	--------

EXP 14	4 Element 20-15-10 M	449.00
--------	----------------------	--------

OK710	Add on kit for EXP 14 giving 40M or 30M	115.00
-------	--------------------------------------------	--------

TH2 Mk 32	Element 20-15-10M	249.00
-----------	-------------------	--------

DISC 7-2	2 Element 40M	486.62
----------	---------------	--------

DISC 7-3	Yagi Director Element 40M	305.70
----------	---------------------------	--------

Monoband Beams

105BAS	5 Element 10M	187.00
--------	---------------	--------

155BAS	5 Element 15M	288.00
--------	---------------	--------

205BAS	5 Element 20M	524.17
--------	---------------	--------

204BAS	4 Element 20M	357.00
--------	---------------	--------

BN86	Balun	30.05
------	-------	-------

18AVT	5 Band Vertical	146.00
-------	-----------------	--------

Rotators


T2X	Heavy Duty Rotator	399.00
-----	--------------------	--------

HAM4	Rotator	329.00
------	---------	--------


AR40	Lightweight rotator	101.72
------	---------------------	--------

CD4511	Rotator	219.00
--------	---------	--------


ALL PRODUCTS AVAILABLE FROM AUTHORISED DEALERS

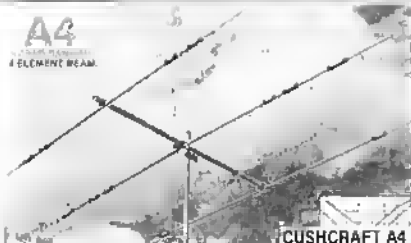

CUSHCRAFT A4



BUTTERNUT
HF4B "Butterfly"

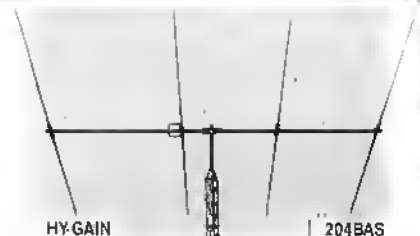

HY-GAIN

204BAS

ICOM

THE NEW R



IC-761, HF TRANSCEIVER with General coverage receiver.

The new ICOM IC-761 H.F. Transceiver has many features making it probably the best top of the line Amateur transceiver available today. This all mode transceiver features an internal tuning unit and A.C. power supply. The A.T.U. boasts a 3 second band selection and tune up with a VSWR matching of less than 1.3:1. For the serious operator the 100kHz-30MHz general coverage receiver and 105dB dynamic range make it ideal for DX chasing. Frequency selection is by the main VFO or via the front panel direct access keypad. And for when reception is difficult, pass band tuning, I.F. shift, notch filter, noise blanker, pre-amp and attenuator should enable you to copy even those weak DX stations whether amateur or broadcast. The C.W. operator will appreciate the electronic keyer, 500Hz filter and full break in (40wpm) other filter options are available. The IC-CR64 high stability crystal is standard as is the CI-V communications interface for computer control. Twin VFO's and split mode for cross band contacts, the IC-761 features program scanning, memory scan and mode select scan and the 32 memories can store frequency and mode. The transceivers operating system is held permanently in ROM and is not dependant upon the lithium battery. The cell is used for memory back up only. A new style meter gives P.O., A.L.C., IC, VC, COMP and SWR readings.

Icom (UK) Ltd.

Dept RC, Sea Street, Herne Bay, Kent CT6 8LD. Tel: 0227 363859. 24 Hour.

Count on us!

FACE OF HF.

You can count on Icom HF Transceivers to give superior performance, take a close look at the Icom range and see for yourself. Authorised dealers throughout the U.K.



IC-751A.

Features:

- All mode.
- 100kHz-30MHz General Coverage Receiver.
- 100 watts.
- 12v Operation.
- 105dB Dynamic Range.
- 32 Memories.
- Electronic Keyer.
- Full Break In (40wpm).
- 500 Hz CW Filter.
- HM36 Microphone.



IC-735.


- Small Compact Size.
- 100kHz-30MHz General Coverage Receiver.
- 100 watts.
- 105dB Dynamic Range.
- FM Standard.
- 12v Operation
- Large LCD Readout.
- 12 Memories.
- CI-V Communications Interface
- HM12 Microphone.

Later in 1988 Icom are launching a terrific new HF transceiver, similar in size to the IC-735 but simpler to operate. This new HF rig is also realistically priced and aimed at a large section of Ham operators. The introduction of this new HF transceiver emphasises Icom's positive approach to market requirements.

Helpline: Telephone us free of charge on 0800 521145, Mon-Fri 09.00-13.00 and 14.00-17.30. This service is strictly for obtaining information about or ordering Icom equipment. We regret this cannot be used by dealers or for repair enquiries and parts orders, thank you.

Datapost: Despatch on same day whenever possible.

Access & Barclaycard: Telephone orders taken by our mail order dept. instant credit & interest-free H.P.



RAYCOM give you MORE PURCHASING POWER!


FOR FAST SERVICE PHONE IN YOUR ORDER WITH ANY MAJOR CREDIT CARD OR IN MOST CASES WE CAN OFFER YOU INSTANT CREDIT OF UP TO £1000.00 SUBJECT TO STATUS. RAYCOM ARE LICENSED CREDIT BROKERS APR 7.9% SUBJECT TO VARIATION FREE CREDIT ON CERTAIN PRODUCTS AT LIST PRICES. 50% DEPOSIT AND SIX MONTHLY PAYMENTS. PLEASE TELEPHONE FOR MORE DETAILS AND APPLICATION FORMS.

NEW HELPLINE 0836 28228 (until 9pm Daily)

THROUGH YOUR CONTINUOUS AND VALUED CUSTOM, RAY WITHERS COMMUNICATIONS LTD HAS MOVED AND EXPANDED TO ENABLE US TO OFFER YOU EVEN BETTER SERVICE AND PRICES. STILL WITH THE RAYCOM GUARANTEE, BEST EQUIPMENT, BEST SERVICE, BEST PRICES, BEST BACK-UP AND PLENTY OF PARKING FACILITIES AND EASIER TO GET TO! WE NOW BOAST THE BEST CENTRAL FACILITIES IN THE COUNTRY, WHY NOT POP ALONG AND SEE THE LATEST TRANSCIVERS, SHORTWAVE/SCANNING RECEIVERS AND ACCESSORIES? MOST OTHER PRODUCTS ADVERTISED IN THIS MAGAZINE ARE AVAILABLE AT RAYCOM, AND DON'T FORGET OUR EXCLUSIVE PRODUCTS AND MODS!

NEW PRODUCTS

NEW
IC781
ICOM



Come and see the NEW ICOM IC781 HF Professional Transceiver with built in Band Scope, Auto ATU and PSU, the new KENWOOD R21 Mobile Scanner, the new YAESU VHF Base Station and Mobile, and the new FOX mobile Scanner because of our purchasing power and overseas contacts we get the new models first! And offer the best introductory prices!

SPECIAL OFFERS

WHILE STOCKS LAST!

	NORMAL	SPECIAL
YAESU FT767	£999.00	£695.00
YAESU VOR44A BASE STATION	£399.95	£199.95
YAESU FT737R	£149.00	£75.00
YAESU FT737R	£172.50	£45.00
ICOM IC720	£479.00	£379.00
ICOM IC720	£399.00	£279.00
KENWOOD R21	£279.00	£199.00
COLOUR ROTARY ROTATOR 3 CORN CARB	£45.00	£37.50

Please ask for our SPECIAL OFFERS LIST, USED LIST, SCANNERS LIST, and LATEST PRODUCT NEWS. Please send a large SAE.

BASE STATIONS

YAESU FT767GX RWC MK2 ALL MODE BAND BASE STATION	£1499.00
YAESU FT767GX RWC MK2 AS ABOVE C/W 2 OR 4 M.I.T.	£1599.00
YAESU FT737R MK1 MK201 WITH IMPROVED FEATURES	£695.00
YAESU FT737R MULTI BAND MULTIMODE SPECIAL OFFER	POA
YAESU FT747GX NEW MULTIMODE TONN H TRANSCEIVER	POA
NEW YAESU FT736R MULTIMODE BASE STATION C/W 2 M.I.T.	£892.50
ICOM IC725 HI HIGH P.I.R. ORNANCE MINI HI TRANSCEIVER	£949.00
ICOM IC725 HI HIGH P.I.R. ORNANCE MINI HI TRANSCEIVER	£949.00
ICOM IC725 HI HIGH P.I.R. ORNANCE MINI HI TRANSCEIVER	£949.00

CALL FOR LIST PRICES ON OTHER ICOM AND YAESU BASE STATIONS

ORDERING INFORMATION

ALL PRODUCTS WE ADVERTISE ARE NORMAL STOCK ITEMS. OUR NEW MAIL ORDER DEPARTMENT CAN NOW DESPATCH MANY LINES SAME DAY, BUT PLEASE ALLOW UP TO 14 DAYS DELIVERY TIME IS SUBJECT TO CARRIAGE METHOD IF ORDERING BY MAIL. PLEASE INCLUDE CARRIAGE AND STATE YOUR DAYTIME TELEPHONE NUMBER. ALL PRODUCTS OVER £750.00 CARRIAGE FREE. PLEASE ALLOW TIME FOR PERSONAL CHECKS TO CLEAR. PLEASE CALL BEFORE ORDERING AND FOR MORE DETAILS.

PLEASE TEL: 021 544 6767

YAESU

FT767
GX RWC
MK2

YAESU



Raycom offer our own improved version of this fabulous HF-UHF transceiver, we fit a small SMD chip component mod board in the VCO to improve the RX dynamic range by up to 20dB, FOC when purchased new from us. If you are lucky enough to own the FT767 already, send your unit + £59.50 and we will fit it for you! (inc. return carriage). Also available in some YAESU dealers. **YAESU HAVE ADOPTED OUR UP-GRADE IN CURRENT PRODUCTION MODELS.**

ANTENNAS & ACCESSORIES

NOW AVAILABLE AT RAYCOM. CUSCRAFT, BUTTERNUT HY-GAIN ANTENNAS, JAYLUM, TONNA, MET, HAM-M ROTATORS, Call for full details, prices, availability and delivery costs.

ICOM AH7000 SUPER 2501300MHz DISCONE	£79.50
GBRV HALF SIZE HF ANTENNA ready to use	£16.50
GBRV FULL SIZE HF ANTENNA ready to use	£18.50
GBKW-TYPE 7 1MHz TRAP DIPOLE KIT SO239	£24.50
GBKW-TYPE as above for use with 300 OHM	£23.50
GBKW-TYPE 2X 7 T TRAPS ONLY LESS CABLE	£9.95
RAYCOM AIRBAND-VHF SIX ELEMENT DISCONE	£12.50
RAYCOM DISCONE VHF 60-600MHz 8E 80739	£29.50
SUN KG209 SE2 5 8 MOBILE TILT-OVER 259	£14.50
RAYCOM CAST GUTTERMOUNT C/W SO239 COAX	£9.50
GAMMA TWIN 2 METRE SLIM JIM KIT inc. inst.	£14.50
RAYCOM RWC HB9CV 2 METRE 2E MINI BEAM	£12.50
RAYCOM RWC HB9CV 70CM 2E MINI BEAM	£8.95

The above popular products POST FREE.

SCANNERS

Bearcat by Uden




UBC 175XL



UBC 100XL

RAYCOM ARE TRADE AND RETAIL DISTRIBUTORS FOR THIS SUPERB RANGE OF QUALITY SCANNERS. THE POPULAR UBC 100XL HAND HELD HAS SOLD IN THOUSANDS BUT IS NOW COMPLEMENTED BY THE UBC 70XCL POCKET SIZED HAND HELD. ALSO THE NEW COST EFFECTIVE UBC 50XL HAND HELD. SEE THE NEW MODELS IN OUR SHOWROOMS OR SEND A SAE FOR DETAILS FROM £99.50.



SCANNERS

YAESU FRG9600 from the company who specialises in listing antenna options, as supplied to Government departments and professional bodies. We also upgrade existing models, please call for more details, prices, delivery and information.

Yaesu FRG9600 Basic Model Improved S Meter + Sans	£465.00
Yaesu FRG9600 RVC Mk2 60-950MHz N Connector Fitted	£495.00
Yaesu FRG9600 RVC Mk3 HI 100MHz 950MHz plus Mk2 Spec	£595.00
Yaesu FRG9600 RVC Mk4 HI 50KHz-950MHz Active Mk3	£625.00
ICOM IC7000 25MHz-20MHz superb quality professional Rx	£859.00
ICOM IC7000 407000 Receiver plus Matching Discone	£937.50
Kenwood R21 New 25-905MHz Mobile Wide and Narrow AM-FM	POA
For VHF-UHF Multi Function Mobile Scanner FM only	£139.00
Uden Bearcat UBC 50XL VHF-UHF 20ch W-field Scanner	£99.50
Uden Bearcat UBC 70XL VHF-UHF 20ch V-field H-field	£199.00
Uden Bearcat UBC 100XL VHF-UHF Airband H-field Scanner	£189.00
Uden Bearcat UBC 175XL VHF-UHF Airband Desk-Top	£175.00
BU200 Mk2 VHF-UHF Airband Military Airband H-field	£220.00
AOR 2002 25-950 820 1300MHz Desk-Top Mobile AM-FM	£469.00
Sony Ai7 Tap Quality VHF-Airband Handheld Scanner	£245.00

Package deal on above Mk3 FRG9600 c/w AH7000 discone, GSRV, PA4 AC PSU complete receiver station HF-UHF including delivery UK mainland 450 £100.00 to above price.

PACKAGE DEAL AVAILABLE! ON ALL YAESU

SHORT WAVE RECEIVERS

Yaesu FRG8800 S: 1.5W 100KHz-20MHz all Mode + Vam	£599.00
Yaesu FRG8800 FRV8800 as above with VHF Conv. Fitted	£679.00
ICOM ICP 1HF Top Grade Communications Receiver	£739.00
Sony PRO80 HI VHF Handheld Scanner + accessories	£345.00
Sony PRO10 Short Wave Airband DEBFX RX with AM-FM	£395.00

Many more makes and models in stock. PLEASE CALL FOR PRICES. DELIVERY COSTS and any advice on information, send large SAE (insured post and packing £10.00) Call us £17.50!

SONY RAYCOM now appointed official Sony dealers, full range of both professional and domestic models available to order.

HANDHELDS

* Extended Receiver coverage available, ask for details	
YAESU FT727R/FB4A 2 SW (5W) DUAL BANDER C/W CHRG	£395.00
*YAESU FT727R/FB10 2 SW (5W) 2MTRS C/W CHARGER	£249.00
*YAESU FT737R/FB10 2 SW (5W) 70CM C/W CHARGER	£259.00
*ICOM MICRO 2E 2 SW 2MTR HANDHELD WITH CHARGER	£209.00
CTE 1600 (SAME AS ICOM IC2E) C/W NICAD CHARGER	£179.00

Many other types of handheld stocked, please enquire

PORTABLES

FT290RMK2 2 SW MULTIMODE STANDARD ACCESSORIES	£399.00
FT290RMK2 2 SW WATT M/M AS ABOVE C/W NICADS CHRG	£425.00
FT290RMK2 FL2025 (STD) WITH 25W LINEAR AMPLIFIER	£395.00
FT690RMK2 6MTR 2 SW MULTIMODE STANDARD ACCESS	£429.00
FT690RMK2 6MTR 2 SW M/M AS ABOVE C/W NICADS CH	£425.00
FT790RMK2 NEW 70CM 2 SW MULTIMODE DUE OUT SOON	£499.00

MOBILES

YAESU FT211E 45W 2MTR MOBILE WITH FREE	
1.4 WAVE ANT	£299.00
YAESU FT212RH NEW 45W 2MTR MOBILE DVS FEATURE OPT	£349.00
*ICOM IC28E 2MTR 25W MOBILE WITH FREE 5/8 ANTENNA	£359.00

Opening hours 9am-5.30pm 6 days, late nights Thursday & Friday till 7pm.



RAYCOM COMMUNICATIONS SYSTEMS LTD.
INTERNATIONAL HOUSE, 963 WOLVERHAMPTON ROAD
OLDBURY WEST MIDLANDS B69 4RJ
Telephone 021 544 6767. Fax 544 7124. Telex 3364B3 Ident-G

ELEMENTARY MATHEMATICS!

The problem:

I want to operate 2m and 70cm mobile. I want full duplex facilities so that I can transmit on one band whilst listening on the other. What are my choices and what is the best solution?

2m FM transceiver	£300.00
70cm FM transceiver	£350.00
2m/70cm duplexer	£26.00

Total Cost = £686.00

The above are based on typical market prices.

The solution:

DUAL BANDER

- ★ 2M/70cms
- ★ 25 Watts
- ★ Full Duplex
- ★ Built-in Diplexer/Dual VFO
- ★ Small size/21 memories


£449!



ALD-24E

What can you say about this transceiver other than praise? The new ALINCO ALD-24E has bought the cost of dual banders down to a price that makes it a serious option to the 2 metre only rig. Just think of the pleasure of being able to select 2m or 70cms at the press of a button. No aerial switching (duplexer built in) and full duplex operation. The ALINCO actually has two completely separate transceivers built into its small case measuring 5.5" x 2" x 6.5". It has all the features of the ALR-22E (see below) at a huge saving over its competitors. We could mention the extended receiver coverage of 138-174 MHz & 420-454MHz at no extra charge, but then everybody would want one! So we thought that

ALR-22E 2M FM MOBILE

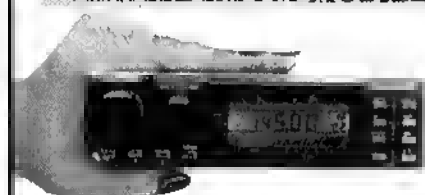

THE RADIO COSTS

£249

THE SCANNER COMES FREE!

- ★ 25 Watts FM
- ★ RX 138-174 MHz (option)
- ★ 21 Memories
- ★ Mini-size

ALINCO products are hitting the market in a big way. And the ALR-22E must rank as today's best buy. When you buy the ALR-22E you don't just purchase a 2 metre mobile, you purchase a vhf scanner as well. For no extra cost we will extend the frequency coverage to 138-174MHz. All this for a price that puts the competition in the shade! Features include 21 memory channels, programmable scan, priority channel options, programmable splits, reverse repeater button, dual speed scanning optional delay, back-lighted LCD display, dual vfo, lithium battery back-up, 25/125kHz steps, mini size measuring 5.5" x 1.5" x 6.5", up/down microphone control, quick release mobile bracket plus mounting hardware, superb sensitivity, 5 watt low power position, manual or electrical tuning, 12 months parts and labour warranty etc. With a specification like this we suggest you phono for colour brochure, today.

2M MICRO HANDHELD

- ★ 3 Watts FM
- ★ Memory Channel
- ★ Battery Save
- ★ Smallest in World

£189!

The ALX-2E is a truly pocket transceiver. Capable of 3 watts output it covers the full 140-150MHz using the familiar thumbwheel dial. Features include memory channel, scanning, priority, battery saver, tone burst, 600KHz shift etc. Supplied complete with ni-cad pack, AC charger, 12v DC charger, and helical. Accessories available include case, car cigar adaptor, headphones/mic, various bell packs etc.

ALX-2E



ALINCO 2m LINEARS

The new ALINCO amplifiers are great value. Compact, reliable and low priced. Now you can boost the power of your hand-held without boosting your overdrill!



ELH 230D₂
1-3 & 5w i/p 30w out
Gasfet pre-amp
Vox or PTT
Full protection
£75.00 inc vat.

ELH260D
1-3w i/p 50w out
Switch pre-amp
Vox or PTT
Output meter
£119.00 inc vat

NEW REVEX METER

- ★ 1.6-1300MHz
- ★ RMS/PEP
- ★ 0-200 Watts



The REVEX VSWR/Power meter will provide all your needs from HF to UHF. Fitted with dual sensors, the first covers 1.6-24 MHz and the second 400-1300MHz. The rangers are 5, 20 and 200 watts FSD, both average and pep. "W" sockets are fitted to the UHF sensor. Made by the WELZ factory, the W570 will provide all your needs.

£119 plus £2 post.

UK'S BEST FREQUENCY GUIDES

UK LISTENERS CONFIDENTIAL FREQUENCY LIST

Everything you have ever wanted to know about stations between 1.6 & 30MHz. Includes aviation, marine, military, press, broadcast and more. Not an import, but a proper UK written book of 130 pages.

Price £5.95 + 90p post
THE COMPLETE VHF/UHF FREQUENCY GUIDE

26MHz-2.25GHz

(NEW 1988 EDITION)

Now you can learn exactly where all the main users of this spectrum are located. It includes all emergency services, aviation, civil & military, pmr, telephones, cellular, and many other services including duplex splits.

Price £5.95 + 90p post
VHF/UHF AIRBAND FREQUENCY GUIDE

A complete list of aviation frequencies of civil & military users. A proper manual with text and photos and free supplement of the latest changes. Don't waste money on cheap photo sheets, get the proper book at this bargain price.

Price £5.95 + 90p post

SONY COMMUNICATIONS



£169 FREE SECURICOR

ICF 7600DS

7600DS	AM/SSB Pocket size 150KHz-30MHz
2001D	AM/USB/LSB all band + Airband VHF
AIR-7	108-174MHz hand-held plus b'cast
PRO80	HF/VHF AM/SSB hand-held plus b'cast
AN-1	Active antenna for 7600/2001
AN-3	VHF antenna with 50ft coax
ACD-4	Mains AC adaptor Air/PRO 80
BP23	Ni-cad battery pack as above
DCC-12A	DC car adaptor all models

£169.00
£329.00
£247.00
£329.00
£49.00
£45.00
£16.95
£16.95
£16.95

NEW EDITION

HF OCEANIC AIRBAND COMMUNICATIONS

Completely updated and expanded, this new edition provides a comprehensive list of frequencies and editorial about this fascinating subject. Covering both civil and military users, the latest edition of this popular guide will tell you all you could ever wish to know about this fascinating subject. The large A4 format is professionally typeset and provides rapid access to the complete HF aviation network.

£3.50 + 70p p&p

WATERS & STANTON

RETAIL & MAIL ORDER:- 18-20, Main Road, Hockley, Essex S55 4OS

Tel: (0702) 206835, 204965

RETAIL ONLY:- 12, North Street, Hornchurch, Essex RM11 1QX,

Tel: (04024) 44765

Visa and Access by telephone, 24hr Answerphone.

ICS

FACSIMILE
RTTY CW ARQ FEC SELFEC AMTOR SITOR PACKET ASCII

Our products cover just about every facet of data communication over radio. From advanced, multi function terminal units, to user friendly computer applications programs, to easy to use optimised single mode terminal units, to low cost graphics and text printers. We cover the field like no other company in the UK — and it's not only products that we sell! Applications back up assistance is always available over the phone, and we give a no quibble 12 months warranty on all products.

Now with NAVTEX!



PK-232

The world's best selling multimode terminal unit. Facsimile, RTTY, Packet, Amtor, CW and ASCII transceiver — all in one box, together with excellent tuning and mode indicators. Superb user friendly applications programs for the IBM-PC, Commodore 64 and 128, BBC model B and Master. Facsimile transceiver program for the IBM-PC and clones.

Price **£269.95** inc VAT. P&P £4.00.


Now with NAVTEX!



FAX-1

Fully automatic weather facsimile and RTTY reception. No computer necessary. Simply takes the audio output from any SSB receiver and sends the decoded picture information to a serial impact dot matrix printer. Fully automatic operation, including system turn on at a pre-determined time. Feeds narrow and 9 wire printers and narrow 24 wire printers. Suitable for marine use. Ask for our application note.

Price **£279.95** inc VAT. P&P £4.00.



PK-87

Solidly made Packet Radio only TNC. Includes Host mode, similar to the PK-232 to enable tighter computer control over all operations. Optimised HF packet modulator/demodulator available. Presently in use at no less than seven UK packet repeater sites. New low price. Net ROM compatible.

Price: **£149.50** inc VAT. P&P £4.00.



PRINTERS

We are now selling our own range of high quality serial impact dot matrix printers. Narrow and wide models. 120 and 180 cps. Draft and NLQ modes. Epson or IBM graphics printer compatible. Better value than you will get anywhere else, and supported by ICS's usual comprehensive warranty.

Prices: SC-1200 (120 cps, 80 col) **£114.95** inc VAT
SC-1500 (180 cps, 80 col) **£172.45** inc VAT
SC-5500 (180 cps, 132 col) **£229.95** inc VAT
Carriage by Securicor on all printers: £9.75

APPLICATIONS SOFTWARE AND MISCELLANEOUS

Fax option for existing PK-232 (includes manual)
PK-232/ IBM-PC applications software
PK-232/ Commodore software, RS-232 cable
PK-232/ BBC software and cable
PK-87/ Commodore software and cable
PK-87/ BBC Software and Cable
PK-FAX: IBM-PC FAX Transceiver Software for IBM-PC/PK-232

Price	Carriage
£49.95	£2.50
£39.00	£2.50
£69.00	£1.50
£35.00	£1.50
£69.00	£1.50
£35.00	£1.50
£39.00	£2.50

Applications assistance — always. Send large SAE for further details.
Visitors by appointment. Prices may vary according to prevailing exchange rates.
Prices include VAT at 15%



ICS ELECTRONICS LTD

P.O. Box 2, Arundel, West Sussex BN18 0NX

Telephone: (024 365) 655 (2 lines) Fax: (024 365) 575



RADIO SOCIETY OF GREAT BRITAIN

THE NATIONAL SOCIETY WHICH REPRESENTS UK RADIO AMATEURS

Founded 1913

Incorporated 1926

Limited by guarantee

Member society of the International Amateur Radio Union

PATRON: HRH PRINCE PHILIP, DUKE OF EDINBURGH, KG

Membership is open to all those with an active interest in radio experimentation and communication as a hobby. Applications for membership should be made to the secretary, from whom full details of Society services may also be obtained.

Headquarters and registered office: **Lambda House, Cranborne Road, Potters Bar, Herts EN6 3JE**
Telex 265871 (MONREF G) quoting CQ083 on first line of message. Electronic mail via Dialcom/Telecom Gold: 87:CQ083
Telephone 0707 59015. Telefax 0707 45145

Secretary and chief executive: David Evans, G3OUF

COUNCIL OF THE SOCIETY

PRESIDENT: Sir Richard Davies, KCVO, CBE, CEng, FIEE, G2XM

EXECUTIVE VICE-PRESIDENT: J N Gannaway, G3YGF

IMMEDIATE PAST-PRESIDENT: J Heathershaw, G4CHH (Mrs)

ORDINARY MEMBERS OF COUNCIL

E J Allaway, MB, ChB, MRCS, LRCP, G3FKM
NG Brinkworth, G3UFB
J D Heys, G3BOQ
G R Jessop, CEng, MIERE, G6JP
A McKenzie, MBE, CEng, FIERE, FAES, G3OSS
B O'Brien, G2AMV
N F O'Brien, FAAI, FSCA, ACIS, MIMI, G3LP
F S G Rose, G2ORT

ZONAL MEMBERS OF COUNCIL

Zone A G R Smith, BSc, MISTC, MBIM, G4AJJ
Zone B J Allen, G3OOT
Zone C J Greenwell, AMIEE, G3AEZ
Zone D J N Gannaway, G3YGF
Zone E E J Case, GW4HWR
Zone F J T Barnes, G3USS
Zone G F Hall, GMBZX

HONORARY OFFICERS

Audio Visual Library co-ordinator: R G Auckland, G2PA
Awards managers: HF: S Emlyn-Jones, GW4BKJ; VHF: Jack Hum, G5UM
Chief mores test examiner: A N Ianson, G3GOQ
HF manager: E J Allaway, G3FKM
Microwave manager: C W Suckling, G3WDG
Observation Service organiser: R J Osborne, G4FJN
Trophies manager: Mrs H Claytons-Smith, G4JKS
VHF manager: K A M Fisher, G3WSN

Correspondence to honorary officers should be addressed directly to them (QTH), not to RSGB HQ

ANNUAL SUBSCRIPTION RATES

Once-off joining fee: £1.50
Corporate members: UK and overseas (Radio Communication by accelerated surface post): £18.50
UK associate member under 18: £6.95. Family member: £7.40
UK students over 18 and under 25: £10.45 (Applications should give applicant's age at last renewal date and include evidence of student status)
Affiliated club or society/registered group (UK): £18.50 (Including Radio Communication): £11.10 (excluding Radio Communication) (Subscriptions include VAT where applicable)
Membership application forms available from RSGB HQ



50MHz

- A WORLD OF POSSIBILITIES

In this month's *News Bulletin* you will read the exciting news that France has made 50MHz permits available to some of its amateurs. To us, the parameters adopted by the DTRE - the French equivalent of the DTI - may seem a little conservative, but in a country where Band 1 television is alive it is very pleasing that 50MHz activity is to be permitted at all. The power limits of 3 and 10W erp, depending on distance from the tv transmitter, are probably not going to set the dx world on fire, but when all is said and done that is not the object of the exercise. The French authorities are adopting the same cautious and conservative approach taken at first by the DTI in the UK, and we would imagine that the initial restrictions are likely to be relaxed somewhat when experience has been gained. You may already have heard some French permit-holders on the 50MHz band by the time you read this - we hadn't as we went to press, but we were all set to welcome them to their new location. *Vive l'Entente Cordiale!*

So far in 1988, that's two new countries on 50MHz - France and the Netherlands. Remarkable to think that, until

quite recently, almost no European administration allowed amateur access to this exciting band. Considering that the vote to allow amateur access in Region 1 to 50MHz at the 1979 World Administrative Radio Conference was only lost by a narrow margin, and given that UK amateur operation on that band doesn't seem to have caused problems for either the European broadcasters or NATO, we wonder what will happen at the next WARC, which is likely to take place in 1992. Could it be that if all European national societies pull together and produce a coherent and convincing case for total Region 1 access to the band, we could have 50MHz back in its rightful place as a full-fledged allocation? What a wonderful result that would be!

So, as we approach the 1988 dx season on 50MHz, and the band once again begins to display some of its profoundly fascinating qualities (and let us be in no doubt that amateurs on 50MHz are already reporting results that are baffling the professionals) let's all resolve to justify the faith shown in the amateur service by the UK licensing authorities. Make a resolution to get on 50MHz this year, even if it's only with 3W to a dipole, and make a point of telling the Society about what you work and how. We're still not hearing all that much activity from Class B licensees on the band - is it just us listening at the wrong times, or are many of you still building equipment, waiting for the dx openings to happen or what? Let's see more special event stations using 50MHz and explaining to the public why the band is so special - and don't forget contests which are always good for finding out just what you can hear.

David Evans, G3OUF

Members' Mailbag

THE EDITOR,
RADIO COMMUNICATION,
LAMBDA HOUSE,
CRANBORNE ROAD,
POTTERS BAR, ENGLAND

PACKET RADIO

Sir—I am prompted by the recent letters from A K Forrest, P Cadman (November *Rad Com*) and Hans Kreuzer (June *Rad Com*) on the subject of packet radio.

It seems to be in the spirit of amateur radio that if a system works well over good communications links, we should push it to work over poor communications links. Although X.25 was not designed for use on high error rate links, its related AX.25 protocol is established, works well most of the time, and is here to stay. Some other means are needed to improve the information rate under poor conditions.

The "rotary" and voting algorithm suggested by A K Forrest has the prime advantage of not changing the AX.25 standard. It can be implemented by any amateur who has access to the source code of his terminal equipment. It is, however, inefficient in terms of information throughput. Three relays means a threefold reduction in information rate, and that doesn't allow for the protocol overheads.

I would like to point the packet radio fraternity to the excellent paper written by Prof A P Clark entitled "Digital Modems for Land Mobile Radio," *IEE Proceedings* Vol 132, Pt F, No 5 August 1985. This paper covers, at an elementary level, the modulation methods available for data transmission at frequencies between 30 and 1,000MHz. By treating AX.25 as the source, and sink of binary information at a given data rate, we can see the effects of various modulation techniques, both binary and M-ary. Amateur developments in these areas would not mean scrapping expensive kit; it may mean, however, some quite complex modem developments, probably involving digital signal processing.

Error detection and correction coding could be included in any modem development, probably by using rate 1:2 or 3:4 convolutional codes. It is worth noting that in a high-noise, high-error environment, error encoding often produces negative results.

D L Wright, GM8AOW

OPENING UP 50MHz

I am quite prepared to stand up and be counted with Mr R T G Freeman, G4SDJ ("Members' Mailbag," *Rad Com* September 1987, and replies thereto in *Rad Com* November 1987).

It seems to me that his critics have missed, or have deliberately sought to evade, the entirely valid points made in his letter.

What makes a Class A licensee potentially better equipped to act responsibly is not simply that he has passed the Morse test—but that he has exercised the determination and self-discipline to do so.

If Class B licensees, through their own indolence, lack of enterprise, or sheer bloody-mindedness, are not prepared to achieve this additional success, then let them eat cake!

T E O'Neil, GM4PRO

Sir—In this letter I hope I don't sound like Mr Freeman, G4SDJ, (Nov *Rad Com*). I don't intend to.

I congratulate you on getting 50MHz for your class B stations; however, I think they should be aware of the fact that USA stations are licensed to 2kW power levels. This is 20dB more than your power levels; equivalent to about 3.5–5 units! CW is copyable much further in the noise than is phone. If you hear someone from here, he may have no other way to copy you if you can't use CW! Most stations I know will be glad to work cross-mode or CW.

If I can but get the point across that people here are listening, maybe your Class B might consider memorising Morse. They don't have to be "speed demons", but I think they will find knowledge of Morse improves their weak signal capabilities. In short, learn Morse not because Mr Freeman says so, but for its utilitarian value.

What do you think?

Jim Foster, NN7K K7ZFG

Whether it's 1.8MHz or 10GHz, the fact remains that Morse is an excellent low-cost weak-signal mode—it's true of 50MHz as well.

WAB—For or against

Sir—G2VO's WABphobia is perfectly understandable, but at the same time the WAB net gives much pleasure to many people and is just one of the many facets of amateur radio. Personally, whenever I am operating 1A on the Isle of Coll in the Hebrides I always spend a few hours with WAB. I always find their net controllers most efficient and courteous and often have time for a quick rag chew.

John Ogg, G4FPP

Sir—Following James Pfall's letter on WAB intrusion, I feel I must air my views. WAB is like anything, you either like it or you don't. Obviously from the numbers involved, over 8,000 WAB record books issued, there is considerable support. I do, however, respect G2VO's views and sympathies with his situation. No doubt you will receive many letters from avid WABers telling you how interesting and rewarding the activity is. I would like to skip this area and highlight an often forgotten aspect of WAB.

In May this year I was transferred by my company over the pond to Houston, Texas. WAB activity on 3.5MHz therefore had to give way to 1.4 and 21MHz operation. Ragchewing with Gs (propagation permitting) and square collecting at the same time became the order of the day and has proved very enjoyable. Perhaps the most rewarding feature, however, the comments received from the G stations for whom this was their first contact into W5 land. Many newly-licensed stations in the UK only operate with 100W into a G5RV and hence at this point in the sunspot cycle have little opportunity of getting past the USA east coast, let alone Texas. I know—six months ago my G5RV didn't do much to help me talking to stations further away than New Jersey. Calling CQdx WAB at least gives these "average" stations the chance to work new call areas.

This is one of the reasons why WAB was founded—to promote worldwide activity in working G stations. Currently there are at least another two hams very active in WAB over here, Jim, K9KO, and Dave AA6DB. In particular, listen out for Dave, he may give you your first west coast contact. Courtesy of WAB, he will be calling you!

So, in reply to G2VO's letter, I would say to James, please be patient with us, as WAB does provide satisfaction to many, even to those not actively involved. I only hope in the coming months I have an opportunity to work GM2VO/A and perhaps demonstrate that WAB is not always a quick exchange of numbers plus letters but can be pleasurable.

Andy L Burns, GW0ECQ/K5,
Houston, Texas

HROs etc

Sir—I fear that some of the critics of Pat Hawker's references to HROs etc have completely missed the points he is making. They do not appreciate the difference between a function and its implementation. Study of the HRO shows how a function, its receiving, was implemented in 1936 by people who can only be described as masters. In 1988 there is still a lot we can learn from their design.

It is also important to realise the difference between professional radio engineering and amateur radio. Obsolete professional equipment may still be adequate for amateur use and provide an inexpensive route for the young to get into our hobby. Without articles like TT one can so easily get the impression that amateur radio is a hobby only for the wealthy.

Pat, keep up the good work, your balance is right.

G P Stacey, G3MCK

Dead right, we think—any other views on this topic?

PURCHASING COMPONENTS

Sir—As an enthusiastic home constructor, the purchasing of radio components becomes a fairly critical factor in the hobby. Gone are the days of the radio shop around the corner where you can purchase exactly what you want; although thinking back it was probably more a case of making do with whatever they could offer. Retailers provide a good source of components, but at the end of the day mail order is where most of my components come from.

Since Ambil (now Cirkil) and Maplin have discontinued their catalogues through the newsagents,

it is reasonably easy to acquire a fairly up-to-date listing of available components, although getting hold of them seems to be an art in itself. Maplin claim to offer a fast efficient service but in 10 years I have not received anything from them in less than three weeks. Cirkil on the other hand can offer a fast service, but are equally fast in cancelling the critical 40 per cent of your order which is out of stock and often remains so for some months.

Over the last two years a new supplier of radio components has emerged and inquires many of the rallies as well as providing a mail order service. The company called Bonex provides a comprehensive range of components and offers a fast reliable service. Perhaps the best supplier found to date is a regular advertiser in *Rad Com*, the C R Supply Co of Sheffield, their service is second to none, their prices are keen, and almost every time 100 per cent of the components ordered arrive by return of post.

It is ironic that as the range of components steadily increases, their availability seems to decline. It may no longer be cost effective to supply small orders to a declining number of hobbyists, and for that reason I think it is important to recognise those firms who continue to supply a good service to amateurs.

M J Grierson, G3TSO

As avid homebrewers ourselves we're aware of the problem. However, we've found that STC Electronic Services have a superb catalogue range and you can buy by credit card over the phone. If you have a computer and modem, you can even interrogate their computer system online and find out whether the bit you want is in stock. Also, RS Components now supply to the public via their "Electromail" subsidiary—and our Farnell Electronic Components rep tells us that they've just introduced a facility whereby anyone can obtain components from them via a telephoned credit card order. STC are on 0279 26777, Electromail are on 0536 201201, and Farnell's number is 0532 636311—and all seem to provide pretty well "next-day" service.

Sir—I was somewhat surprised to read Mr Peter McBeath's letter your December issue.

I would agree that Electrovalue is an excellent firm, but surely the modest amounts asked for catalogues from a number of firms is no reason not to purchase from a company who makes such a charge. In general these catalogues are not just lists of prices but contain much useful information. Perusal of the catalogue from Cirkil, Electromail and Maplin Electronics will certainly make this point clear. From my own point of view the availability of a technical catalogue with the parameters of a wide range of components clearly presented is certainly a help for designs both now and in the future.

Even today most local radio/TV retailers support a service department, and I am sure that they would be willing to sell the "odd" component if requested. In addition there are many rallies up and down the country where a truly "fantastic" bargain can be obtained. "Amazing Bargain Packs" are being offered in your December issue (*Billington Valves*, page 968). Go to Car Boot sales, held everywhere during the summer, and buy old CB radios or domestic radios/TV to strip for the components. Your local refuse dump usually has a pile of old valve radios in a corner, very good for two- and three-gang variable capacitors, just the thing for that old QRP transmitter! I am sure that even today most radio amateurs/swls have the inevitable "junk box" and would be pleased to help you out if requested. No, the RSGB should NOT retail components, as they have neither the expertise nor capital required.

Come on Mr McBeath, where is your spirit of adventure?

J D Harris, G3LWM

We've just discovered that Farnell Electronic Components—whose catalogue range we've used for many years and who seem to stock everything you could wish for—will now sell to credit card holders. Give them a ring on 0532 636311.

RSGB NATIONAL VHF CONVENTION

Sandown Park Racecourse, Esher, Surrey

Sunday 1 May 1988

- One-day exhibition and lecture programme
- Presentation of trophies
- Comprehensive trade exhibition
- Morse tests

- Specialist groups
- Equipment test facility
- Full lecture programme on vhf, uhf and microwave subjects

PROGRAMME

- 1030** Convention opens. Enter through main entrance. (Open to exhibitors from 0800 through More Lane entrance)
Refreshments. Snack bar in the hall will be open from 1100 to 1600, and the licensed bar will be open throughout the convention.
- 1130** AGM 6m Group
- 1330** Convention address and presentation of trophies by RSGB President Sir Richard Davies, KCVO, CBE, CEng, FIEE, G2XM

LECTURE PROGRAMME

Detailed arrangement for lectures will be notified on arrival

- | | A | B | G |
|-------------|-----------------------------------------------------------------------------|---------------------------------------------------------------|-----------------------------------------------|
| 1415 | "Trends in tropo. The best dx is yet to come", Ray Flavell, G3LTP | "Measurements for the amateur station", Peter Chadwick, G3RZP | Morse test forum - Robert McEwan Reid, G4GTO |
| 1515 | "The consideration of tvf from a 144MHz transmitter", Angus McKenzie, G3OSS | NW Kent Beacon Group - Building microwave beacons | Remote Imaging Group AGM - Henry Neale, G3REH |
| 1615 | Packet Working Group, Mike Dennison, G3XDV | "Portable microwave operation", Peter Day, G3PHO | VHF Contests Committee forum |
| 1715 | Lecture session ends | | |
| 1800 | Trade exhibition closes, Convention ends | | |

ADMISSION

To simplify management and to reduce costs, it has been decided, as last year, not to issue admission tickets for this convention, either in advance or at the gate.


Admission will be by payment on entry as follows:

Convention and exhibition.....	£1
:: :: (under 18).....	50p
:: :: (under 14).....	Free

RAIL TRAVEL . . . Please note that British Rail's Esher station is closed on Sundays. One alternative is to go by British Rail to Kingston and then take a 218, 537 or 715 bus to Sandown Park.

ACCESS MAP TO SANDOWN PARK

Map by courtesy of United Racecourses

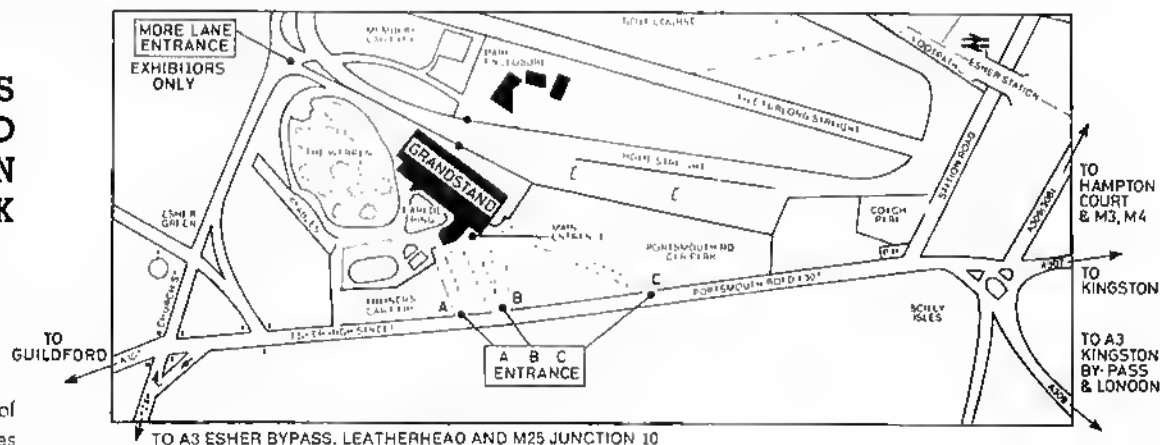

A design for a desk microphone with automatic gain control

D MACIVER, GISJU*

When I wrote "GISJU Neck Boom Microphone", *Rad Com* December 1986, I had no idea it would be so popular. As I said in that article, I use one of these microphones in the shack at the home QTH on a fairly long lead in enable me to hold a QSO while still being able to move about the shack freely or use a soldering iron etc. However, it did still have its limitations, not the least of which was that the cable to the mic was a confounded nuisance at times, conspiring to wind itself around my feet or drag things off the bench whenever I picked it up.

I was very pleased with the excellent quality of audio given by the electret mic, and I have received many good reports which I am sure were due almost entirely to the electret's talents rather than to my audio endeavours. Then one day I heard about a chip known as a *voice operated gain adjusting device* (vogad). This small eight-legged beastie was (as it turned out) the answer to all my problems with long cables etc.

The 6270 vogad chip is an integrated circuit combining the functions of an audio amplifier and a vogad, designed to accept signals from a low-output microphone such as an electret and to provide an essentially-constant output signal of approximately 90mV for a 60dB range of input. The dynamic range, attack and decay times are controlled by external components.

The output of an electret insert is ideally matched for feeding to the vogad input stage. The vogad automatically compensates for low audio levels, and thus maintains a constant output to the rig regardless of your voice level in (within reason) your distance from the mic.

Provision is made for the gain of the preamp stage to be reduced by a switch for use when in close proximity to the mic or when there is a high background noise level, ie when operating mobile etc. Another switch selects the low frequency passband, allowing you to adjust the "tone" of your audio transmissions.

Although this design is for a desk mic, it is quite possible to fit the same pcb into the neck mic case and use it/mobile. In this case the gain and tone switching mentioned above would be pre-set to suit and the switches omitted.

Circuit description

Referring to the circuit diagram (Fig 1), it will be seen that there are three connections to the electret mic element. Apart from the output and ground there is also a positive supply. This is needed to supply the fet preamp fitted inside the electret capsule. The output from the electret passes through the decoupling capacitor C2 into one input (pin 5) of the vogad chip. The vogad has two inputs to enable inputs from balanced mic outputs, but in this case we only need to use one. The other input on pin 4 is ignored.

The first stage of the vogad is a differential preamplifier, the gain of which is age controlled by feedback from the output of the second stage. This age control voltage is fed back via a time constant circuit (R8 and C8) that sets the attack and decay times of the circuit.

The second stage gain of the vogad is controlled by R6 in parallel with an internal 10kΩ resistor. With R6 out of circuit via S2, the gain of this stage is set internally at maximum. This means that any signal between about 3mV and the maximum input level will be maintained at approximately 90mV.

The formula for determining the second stage gain set with the external resistor R6 is:

$$\text{Gain} = \frac{R6 \times 10,000}{(R6 + 10,000) \times 680} \quad (R6 \text{ is in ohms})$$

Thus the stage gain is 1.91 times with the 1.5kΩ resistor fitted, and other values give the following results:

R6 = 680Ω	= 0.93 times	R6 = 2.7kΩ	= 3.12 times
R6 = 820Ω	= 1.11 times	R6 = 3.3kΩ	= 3.64 times
R6 = 1kΩ	= 1.33 times	R6 = 4.7kΩ	= 4.70 times
R6 = 1.2kΩ	= 1.57 times	R6 = 5.6kΩ	= 5.27 times
R6 = 1.5kΩ	= 1.91 times	R6 = 6.8kΩ	= 5.95 times
R6 = 1.8kΩ	= 2.24 times	R6 = 8.2kΩ	= 6.62 times
R6 = 2.2kΩ	= 2.65 times		

Therefore, if R6 is changed for a different value, it is possible to tailor the sensitivity of the vogad to suit the environment in which the microphone is being used. If, for example, the same design was being modified as a mobile version, and was going to be used in a vehicle with a high level of background noise, R6 could be changed for a lower value in order to reduce the sensitivity to a level at which the vogad will only respond to the wanted sound (your voice) and will ignore unwanted sounds such as road and wind noise.

Frequency response

The bottom end of the frequency is set by C6 or C7 and is switch selectable at 0.1μF or 1μF. The top end of the frequency is set by C4 and has been fixed at 4.7nF.

These values as set should be found to provide very good results but of course the user is quite free to change these values if required. As a general guide, substitution by a smaller capacitor will raise the set frequency and a higher value will lower the set frequency.

Attack and decay times

The attack time is set by C8 at 22μF, which gives an attack time of 8-8ms. The formula, should you wish to change this, is:

$$\text{Attack time in milliseconds} = 0.4 \times C8 \text{ in microfarads}$$

The decay period is determined by the time constant of C8 and R8 and will be extended by an increase in the value of R8 or reduced by a decrease in value.

Output level

The output level is set by the trimmer RV1 and further reduced by about five per cent by the potential divider of R3 and R4. If it is found that the output level is still too high with RV1 turned almost fully down (clockwise) then try reducing the value of R3.

Assembling the pcb

The terminal pins and the chip socket should be fitted to the board first. Be careful not to overheat the pcb tracks, and only use a small quantity of solder. Too much will cause solder blobs that may bridge tracks.

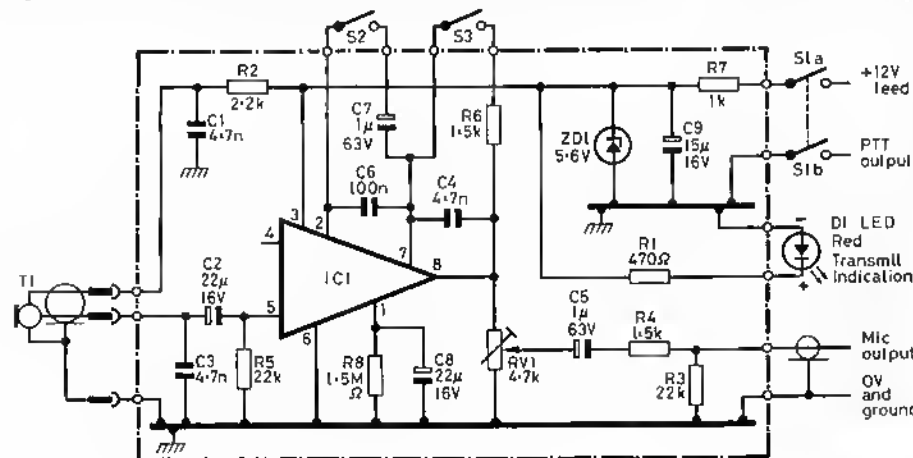


Fig 1. Circuit diagram

*176 Burgess Road, East Ham, London E6 2BS.

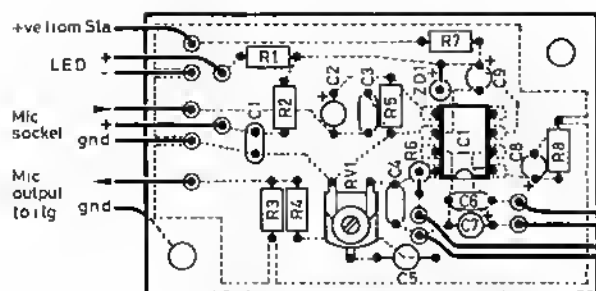


Fig 2. Components layout

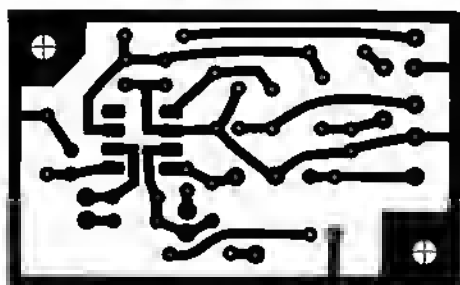


Fig 3. PCB copper side, actual size

Now insert all the resistors one by one. Check carefully to see that these are all correctly positioned, as it is much easier to remove and replace them now, than when all the other parts are fitted. The trimmer resistor RV1 should also be fitted now.

Next identify and fit the capacitors, being sure to place them as shown in Fig 2. On standard type electrolytics the negative lead is marked by a black stripe down the side of the body. Sometimes this stripe contains small (-) symbols. With tantalum types the positive lead is marked by a (+) symbol on the body. It is almost always the right-hand lead when looking at the side with the value printed on it.

The last soldered item is the zener diode. This should be placed with the positive lead positioned as shown in Fig 2.

Finally, check the board over very closely for solder blobs for dry joints. Solder blobs and bridged tracks are corrected by reheating and removing excess solder. Dry joints are usually very dull and crystalline and are the result of not heating the wire and the track equally when soldering, or of moving the component before the solder had set hard. If you have any dry joints, simply resolder them using some fresh solder.

The microphone module

Strip back about 0.5in of the insulation from one end of the small screened cable. This should have two cores, one red and one blue, as well as a copper screen. Solder the red wire to the positive terminal of the electret, blue to the mic output terminal and the screen to the ground terminal.

Note: It is very important to solder quickly and carefully or the electret will be damaged by excess heat.

Next, bend one end of the stiff wire back onto itself by about 0.5in. Then insert the wire into the plastic tube together with the screened wire from the electret. Cut a piece of the heat-shrink sleeving about 1.5in long and shrink this down onto the electret capsule and the plastic tube. See Fig 4.

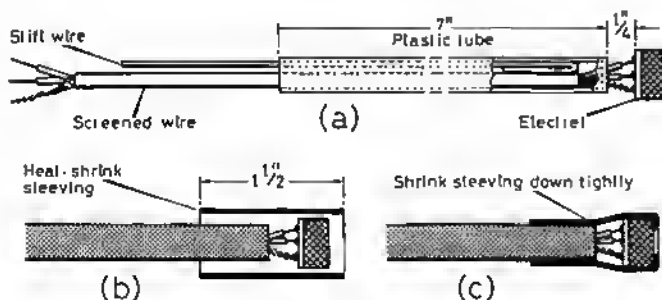


Fig 4. Microphone boom construction

Components list

R1	470Ω	1/4watt
R2	2.2kΩ	"
R3,5	22kΩ	"
R4,6	1.5kΩ	"
R7	1kΩ	"
R8	1.5MΩ	"
RV1	4.7kΩ	Min horizontal preset trimmer
C1,3,4	4.7nF	100V ceramic
C2,8	22μF	16V electrolytic
C5	1μF	reversible electrolytic
C6	100nF	100V ceramic
C7	1μF	63V electrolytic
C9	15μF	16V electrolytic
D1	Red	l.e.d (and mounting bezel)
ZD1	5.6V	zener diode BZX83C5V6
IC1		Vogad chip RS6270 or Plessey SL6270CDP
T1		Electret capsule (three-terminal type)

S1 Min dpdt toggle switch
S2,3 Min spst toggle switches
Printed circuit board to pattern
Three-pin DIN socket (chassis mounting)
Three-pin DIN plug
Cable outlet grommet
Metal case approximately 105mm by 60mm by 35mm
Four rubber slick-on feet
Length of four-core individually-screened cable to suit 12in of two-core screened cable (thin)
7in of small plastic tubing
8in of stiff bare wire
2in piece of 9.5mm heat shrink tubing
12 small terminal pins
Solder lag
Microphone connector to suit your rig
A complete kit of parts to complete this project, including the pcb, is available by post at £15.95 inc p&p from: Digital Security, 176 Burges Road, East Ham, London E6 2BS.

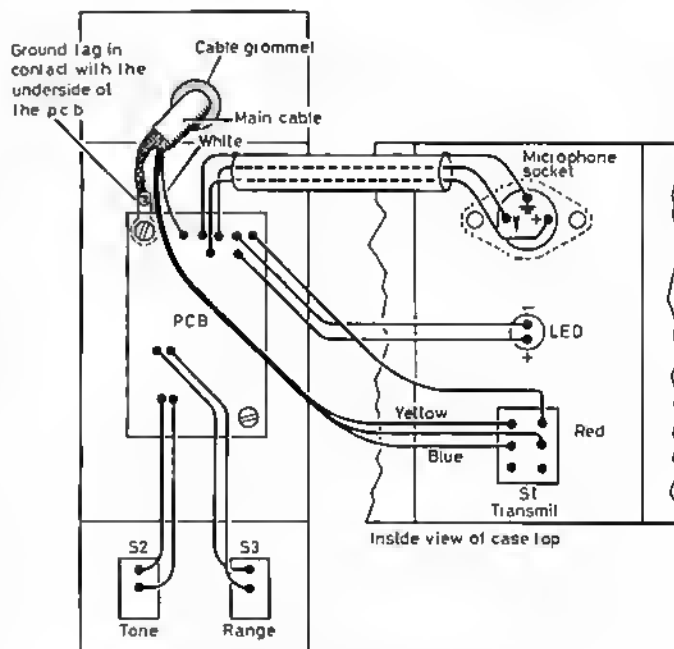


Fig 5. Microphone case wiring diagram

Note: When using the hot air gun, be sure to do this quickly to avoid damaging the electret element.

Refer to the mic module diagram for details.

Trim the mic boom to approximately 7in long and fit the DIN plug to the end. This should be connected as shown in Fig 5. Save the remaining 5in of wire for use inside the case.


The case

Start by marking out the holes as shown in Fig 6. Centre-punch and drill the hole positions using a small pilot drill of about 1/16in. This will make it easier to drill the larger holes. Then, using a sharp drill of the correct size, drill out the holes to the dimensions given. Fit the cable grommet, switches and the l.e.d. The DIN socket should also be mounted now.

The cable

Strip one end of the main cable back about 4in and separate all the screen wires from the core wires and twist them together. Trim the screen wire to

Dimensions are
in millimetres

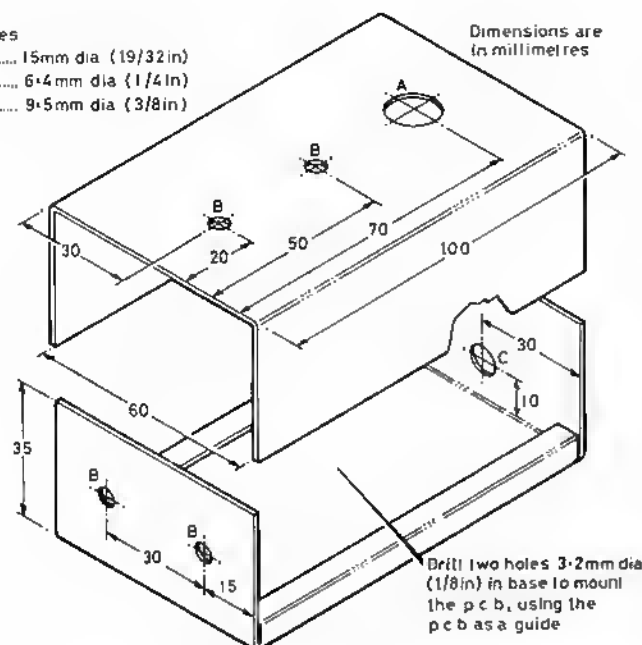

about 0.75in long then slip a piece of the stripped-off sleeving (about 0.5in long) over the end. Solder the ground tag to the end of the screen braid.

Wire up the other end of the cable to a plug suitable for your rig. The wires are as follows:

If your rig provides a positive output at the socket of between 5 and 14V dc then this may be used for the red wire above. Alternatively, the red wire can be joined to a suitable length of heavier wire inside the plug (insulated with a small piece of sleeving), and brought back out of the plug for connection to the rig supply.

A second method is to use a PP3 battery built into the mic case. Since the unit only uses around 30mA maximum, a standard PP3 will last for quite a long while. The unit only uses current when switched to transmit, so a separate switch is not required. If a battery is used it is important that it is replaced before the voltage drops too low. When a battery nears the end of its working life the impedance increases. The effect of such an increase could lead to switching transients when the ptt is operated.

Join up the switches and the l.c.d. with short lengths of wire to the solder pins as shown in Fig 5. The DIN socket should be wired up with the remaining length of the small screened cable (about 5in long) also as shown in Fig 5.

Check carefully that all connections have been made correctly and that there are no broken or trapped wires. Set the trimmer RV1 to about the halfway position. Plug in the voga chip, taking care to insert it the correct way round. Apply power and test the mic on air with a QSO. Adjust the trimmer to a level that allows full modulation of your signal when speaking in a normal voice from about 12in away from the mic. If this is done correctly, you should find that you can talk normally from across the room without much effect on your signal.

DXING WITH DIPOLES

Some practical considerations

As an active hf type with a taste for dx chasing, I am occasionally called upon by the local radio club to give talks on antennas. It appears that my relative success using dipoles is taken as the result of magic, whereas persistence is nearer the truth. It amazes me to find that many are convinced that unless an antenna is erected *exactly* as per the book it will not work *at all*. In addition, vhf/uhf types almost all use commercial antennas. When transferring to hf the belief persists that no antenna can be any use unless it is aluminium and made in a factory. This often results in considerable amounts of money being spent on commercial "limited-space" antennas and consequent disappointment with the results.

I have yet to find an antenna that would fit in my garden exactly as described, but it has proved possible to take great liberties with the layout of wire antennas and still get worthwhile results. My five-band DXCC plaque was obtained purely on dipoles or their derivatives. Maybe this "canned-history" of dipoles used at various QTHs will be found useful to the newer Class A licensees. The intention is not to provide specific solutions to specific problems but to promote some experimentation. QTHs which seem physically identical can produce wildly differing results at rf, with a "super" antenna at one QTH giving disappointing results at another.

The first decisions to be made have nothing to do with antennas, but relate to what exactly the precise areas of interest are: hf dxing, lower frequency ragchewing, contests, rtty, ssb — there are dozens of facets under the overall banner of hf, and few will have the time, space, or inclination to pursue everything. Any time spent as an swl will have already highlighted the main areas of interest, but for those without any ideas whatsoever I would recommend [1] as an excellent guide. As well as operating tips, it gives a summary of what can be expected of the various bands and is a goldmine of general information.

There are dozens of antenna books on the market, and I would strongly advise borrowing from the public library before deciding which to purchase. My own particular favourite is [2] which not only gives practical examples of antennas for limited spaces but also goes into the theory for those that are interested.

One of the simplest type of antenna to get going, and probably the first that many try, especially for 3.5 and 7MHz, is the dipole. In its basic form it is essentially a single-band antenna, with the oft-quoted exception of a 7MHz dipole which will also be resonant on 21MHz. Unfortunately most books omit to point out that the feed impedance on 21MHz will be somewhat higher than the usual 50/75 Ω so the *swr* on 21MHz will be about 2:1. This is no great problem for owners of valve rigs but some solidstate rigs might require the use of an *atu* to give of their best.

Band MHz	Dipole length (m)	Trim each end per 100kHz (mm)
1-8	83.33	2,190
3-5	42.86	595
7	21.43	150
10	14.85	70
14	10.71	35
18	8.33	20
21	7.14	15
24	6.03	12
28	5.36	10

*502 Lapwood Avenue, Kingswinford, W Midlands DY6 8SG.

corrections, but if cut to the lengths given they will almost certainly be slightly too long.

To judge from comments heard over the air, it seems to be a commonly-held belief that the feed impedance of a dipole at resonance is *always* 50Ω, but Fig 1 shows that this is certainly not the case. Even then I would presume the curves were derived from dipoles out in the clear and erected in a straight line. Add a few close buildings, together with a few dog-legs in the wire, and the feed impedance could be anywhere. All of this suggests that especially at lower frequencies there is no way that a dipole at 25ft or so can ever present a 1:1 vswr to 50Ω coaxial cable, yet any number of operators can be heard proclaiming their's does.

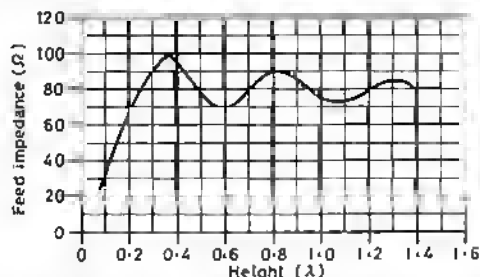


Fig 1. Graph showing variation of feed impedance with height above ground for a horizontal half-wavelength dipole

It all comes down to the way that the antenna has been adjusted. Like most things in life there is a correct way and an easy way. Naturally enough most people opt for the simple approach and, to be fair, providing the antenna is full-size the difference between the two methods (at low heights anyway) is hard to detect.

The correct way is to adjust the dipole for resonance using a gdo or a noise bridge and then accepting whatever residual vswr results. With solidstate rigs this might mean the use of an atu, and all that has happened here is that the lower amplifier "load" and "tune" controls of a valved rig are in an outboard unit. Incidentally, most of the small atus available are not really suitable for matching anything other than a residual vswr in a coaxial line, and perhaps ought to be referred to by some other name to avoid confusion. This also applies to the inbuilt automatic atus of more elaborate solidstate rigs which, it should be noted, are *not* in circuit on receive.

The easy way to adjust a dipole is to measure the vswr at the shack end of the coaxial cable and then cheerfully cut away at the ends of the antenna until the indicated vswr falls to some impressively low figure. In reality the antenna will be resonant at some slightly different frequency, probably higher, but as mentioned previously, this is unlikely to cause problems with full-size antennas. When experimenting with miniature antennas of any kind it is absolutely essential to adjust for resonance and then match the resulting feed impedance to 50Ω, or else losses will be high.

Multiband operation

There are three main techniques for multiband use of a dipole. They are sufficiently different to deal with each type separately, although it is possible to combine the techniques in a variety of ways.

PARALLEL DIPOLES. Dipoles for different bands can be operated from a common feeder, Fig 2, as described in any number of books, but there are pitfalls for the unwary. I found that considerable interaction occurred if the dipoles were spaced at less than 100mm from each other, with the vswr changing dramatically whenever it rained. After spending considerable amounts of time attempting to keep all of the dipoles equally taut, it turns out not to be necessary. Take out all the strain in the longest dipole and let the others just hang in the spacers. It helps to make the lower dipoles out of fairly rigid wire to avoid them moving around relative to one another in the wind and shifting the resonance slightly. A systematic approach to adjusting parallel dipoles to resonance is essential because even at 100mm spacing the dipoles load each other to a certain extent and it is very easy to end up chasing your tail. Taking a

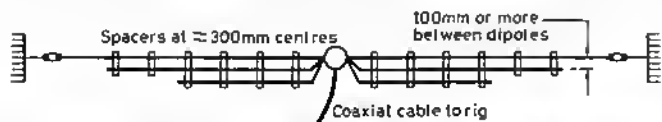


Fig 2. Dipoles can be put in parallel across a common feedline. Interaction can be minimised by keeping 100mm spacing or more between the wires

14/21/28MHz dipole as an example, adjust the 28MHz dipole first. This will undoubtedly shift the resonances of the 14 and 21MHz sections, but when moving on next to adjust the 21MHz section, this should only affect the 14MHz dipole. Presumably this is because the ends of the 21MHz dipole are beyond the ends of the 28MHz one. Finally, adjust the 14MHz dipole and the setup is ready for use.

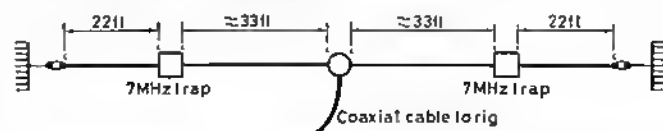


Fig 3. Overall dimensions of a 3-5/7MHz trap dipole with "W3DZZ" or "G8KW" traps. With LC ratio of given traps the antenna is said to be usable on all five (pre-WARC) bands but this presupposes the antenna is completely in the clear

TRAPS. The most common form of a trap dipole is shown in Fig 3 with the traps resonant at 7MHz to provide 3-5 and 7MHz coverage. Note that the overall length of the 3-5MHz section is reduced slightly by the loading effect of the coils within the traps. Dipoles of the type shown are often referred to as "W3DZZ" or "G8KW" dipoles, depending on where their user obtained the traps. With the LC ratio of these traps, it is often claimed to be a five-band dipole, but this generally depends on having feeders of a specific length and having the dipole well in the clear. With low heights and restricted space it is highly unlikely to present a reasonable match except for 3-5/7/21MHz.

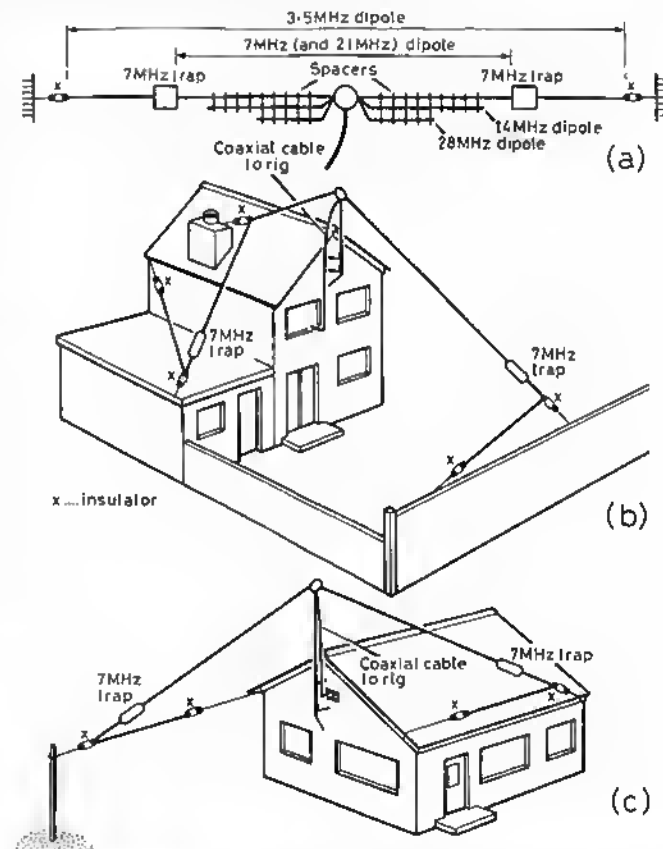


Fig 4. (a) As Fig 3 but with parallel dipoles for 14 and 28MHz to ensure five-band coverage. 21MHz coverage is obtained by virtue of 7MHz section. (b) Even when dog-legged to fit into a restricted space the antenna still proved effective. (c) Another QTH and this time the portions beyond the traps had to run back towards the supporting pole. It still worked

A combination of traps and parallel dipoles can be used, Fig 4, to give all-band coverage, together with the liberties that can be taken where space is limited. 7MHz traps encased in epoxy resin are obtainable from a variety of sources, but an item in *Technical Topics* [3] showed how to make traps for all bands from a small coil of coaxial cable—I've been using a pair for 7MHz traps to this design ever since. They worked first time and have caused no problems whatsoever. Although physically larger than the encased type, they are much lighter and do not bob

around so much in the wind. For those wishing to purchase ready-made traps, G2DYM [4] sells a complete range of traps for both wire antennas and beams and verticals.




Fig 5. Overall dimensions of the "Sagant EL40X" compressed trap dipole for 3-5/7MHz. See also [5] for stockists

There is no reason why the LC ratio of the traps cannot be increased dramatically to shorten the overall length and Fig 5 shows the overall dimensions of one commercially-available "compressed" trap dipole [5], although there is no reason why traps cannot be made. High-voltage capacitors can be a problem but a length of coaxial cable can be used, instead, Fig 6, using one insulated core from a length of 13A mains flex around a piece of plastic pipe as the coil. The diameter is not critical, and I used a 200mm length of 25mm pipe that was to hand. Use a gilo to set the resonance to 7.05MHz while adjusting the length of coaxial cable, then seal the whole assembly with heatshrink tubing or whatever. Large coils reduce the amount of wire needed beyond the traps but reduce the useable bandwidth in 3-5MHz. With an overall length of 84ft the resonance on 3-5MHz will be about 75kHz between the 2:1 points. An atu can extend this range somewhat, but remember that the atu does not affect the swr between itself and the feedpoint, and losses will become excessive if the swr on the coaxial cable is much above 3:1.

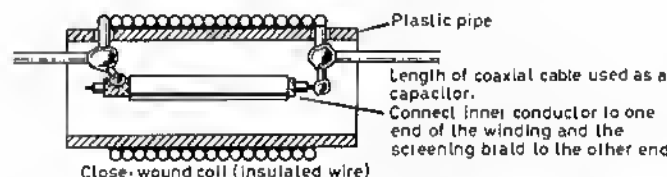


Fig 6. Section through homebrewed 7MHz trap with high LC ratio. With a 25mm diameter pipe, 200mm long, the resulting overall length was similar to that of Fig 5

TUNED DOUBLET. The use of open-wire feeders with a dipole has much to recommend it. The dipole can not only be operated in several bands but all adjustment is carried out from the comfort of the shack. Given the amount of rain we get in this country, the less time spent outside trimming antennas the better. Open-wire feeders do need the use of an atu with a balanced output though. There are some fairly elaborate and expensive atus on the market which achieve a balanced output by using a ferrite toroid on the output of a "single-ended" atu. These are not so versatile as the Z-match type of atu since atus balanced with a toroid will not be able to match such a wide range of impedances as they can in the single-ended mode.

In my experience toroids are quite happy with purely resistive feeds, but certain combinations of reactance can quickly cause them to over-heat. When experimenting with toroid balancing it proved possible to get a core rated at 1kW too hot to hold with just 100W of rf into a complex load. Maybe I was just unfortunate, but it is something to bear in mind. With tuned feeders there are no worries about what the feed impedance at low heights will be because the atu takes care of it and, unlike coaxial cable, there are no worries about having a high swr on the feeder. Where space is limited, the doublet can be less than one half-wavelength long and yet still be effective, but while most books point out how a 3-5MHz dipole with tuned feeders can be used on all higher frequencies, they do not often mention that this presupposes the antenna is horizontal. More on this later.

Inverted-Vs

There is nothing magical about an inverted-V, but the necessity for only one central support, together with the reduced length of garden needed, obviously makes them an attractive proposition for 1-8/3-5/7MHz. They seem to give virtually omnidirectional radiation at any distance, and give a good account of themselves for both inter-G and dx working at lower frequencies. The ability to receive close-in signals well is not particularly useful when trying to work some dx, but unless space permits a decent vertical and a low dipole together it is the price you have to pay. Regarding verticals, they are often claimed to be the antennas for lower frequency dxing from restricted sites, but to my mind there are some snags. In limited spaces the vertical will be surrounded, and hence screened, by buildings. Given a lack of space, even the most diligent

would be hard pressed to get down enough radials to do it full justice. As regards the low-angle radiation properties, [6] contains reference to the fact that verticals need to be *physically* one quarter-wave or more to achieve it, while [7] maintains that low-angle radiation is not an *inherent* property of vertical antennas, but that like most things in life it all depends. Furthermore, [8] contains the results of tests which seem to indicate that the feed impedance of groundplanes can be rather less than predicted.

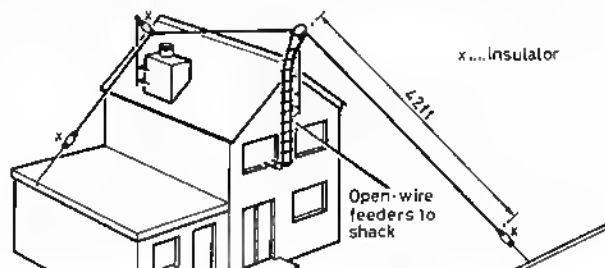


Fig 7. A tuned doublet with an 84ft top worked well on all bands in an inverted-V configuration. Longer doublets need to be horizontal to be effective on 21 and 28MHz

All of this has biased me towards dipoles or doublets, with restricted sites dictating an inverted-V configuration. Inverted-Vs for 3-5MHz do not give good results at 21/28MHz, and with the benefit of hindsight I would opt for an inverted-V for 3-5/7/10MHz (trap dipole or doublet) plus separate dipoles for 14/21/28MHz. For the hf bands, either parallel dipoles, trap dipoles, or even a separate doublet (perhaps vertical) could be used. After some experiments I found that the best top length for an inverted-V doublet for *all* bands was about 84ft (Fig 7). This is somewhat short for 3-5MHz but any longer and the 28MHz performance deteriorates dramatically. Even so, it did prove capable of working into ZL on 3-5MHz, which can't be said.

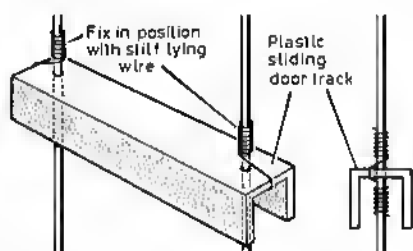


Fig 8. Spacers for open-wire line formed from plastic sliding door track or, alternatively, plastic spines for A4 sheets. Spacing between wires is not critical

Open-wire feeders

There seem to be two main objections to open-wire feeders, although cynics would generally say it is just the fact that you can't buy it ready-made which puts people off. One or two traders now supply patent spacers for open-wire line, but these can become expensive for long runs and I have used plastic sliding-door track (Fig 8). The "U" section does not roll away when you try and cut it, and the plastic seems resistant to UV degradation. Most diy stores stock it, but an alternative is to use the plastic spines for A4 sheets which can be purchased from stationers.

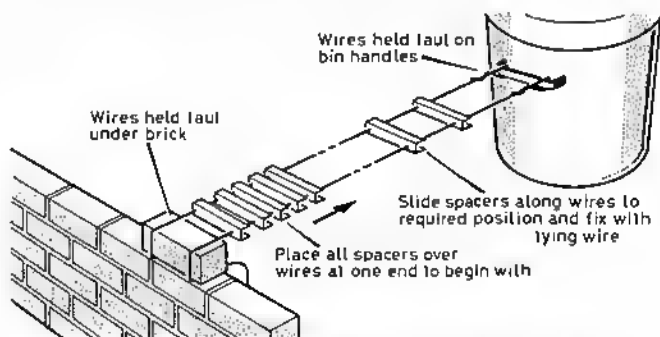


Fig 9. Keeping the feeders taut while positioning the spacers ensures the line will look neat and tidy when in its final position

Open-wire feeders can turn out to be a real rat's nest unless gone about in the right way, but after several abortive attempts the following method was evolved (Fig 9). Tension the wires at a convenient height, with all of the spacers slipped over one end. Then, using a ruler to give 12in spacing, slide the spacers up the wires and fix in position. The resulting feeder will retain its neat and tidy appearance when up in the air. The spacing between the wires is not critical, and I used 100mm purely because it looked about right!

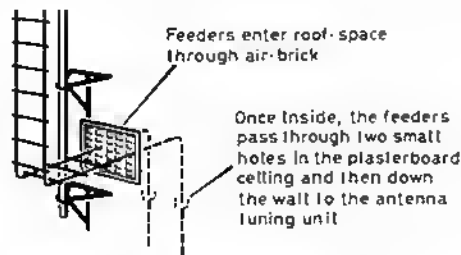


Fig 10. As an alternative to coming through a window frame, open-wire feeders can enter the roof space via an "air-brick" before coming down through the ceiling of the shack

Several people have mentioned the difficulty of getting open-wire feeders into the house, but there seems little difference in making two small holes for open-wire lines than one larger hole for coaxial cable. Fig 10 shows one way of getting an open-wire line into a house.

Baluns

You either swear by them, or swear at them. Perhaps I've been unlucky with the few that I've made or bought, but I found that a ferrite balun at the feedpoint caused spurious readings on a gdo when adjusting the antenna. Generally, baluns are stated to be essential to prevent currents circulating on the outer of coaxial cable and possibly causing hci/tvi by radiation within the building. This may well be true where dipoles are in a nice straight line and well in the clear, but at low heights with plenty of dog-legs the feeder rarely comes away from the antenna at right-angles. Currents could be induced on the outer from pickup of radiated rf, and a balun at the feedpoint would not prevent that. I prefer to use a few turns of coaxial cable through some ferrite rings where the cable enters the building (Fig 11). Not everyone will agree with this approach, and it is something for people to sort out for themselves.

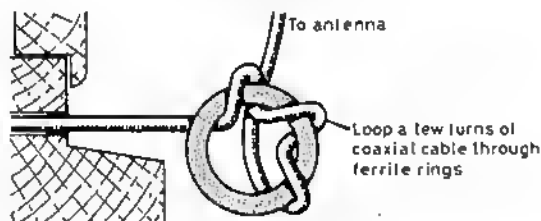


Fig 11. In restricted sites feeders cannot often come away at right angle to the antenna. Ferrite rings can help suppress currents picked up on the coaxial outer

Very small antennas

In restricted spaces there is a great temptation to try very small antennas, but it is an area where disappointing results will be obtained by the inexperienced. There are two main problems with very short antennas, the main one being that of matching. As the size of an antenna is reduced, the radiation resistance falls quite dramatically. Unless great care is taken with feedpoint details, the losses will be excessive, resulting in poor efficiency. Also, small antennas are very sensitive to the proximity of other objects and to wetting/drying during rainstorms, both of which can shift the resonant frequency.

Even with an efficiently-designed small antenna, the price to be paid for reduced size is reduced bandwidth. Commercial trap verticals, for example, will have a useable bandwidth of only 1.5kHz or so on 3.5MHz. A good rule of thumb is that an antenna can be reduced to between two-thirds to one-half of its full size (preferably with end loading) before efficiency starts to fall. Les Moxon goes into great detail about small antennas in his book [2]. Helical antennas are claimed to be effective down to about one-tenth of a wavelength, although I have never used one

used one myself. Again, care in matching is essential and bandwidths will be very narrow. A helical antenna for the amateur bands is made commercially [9] and G3IL reports using one to great effect indoors; [10] contains a section on the theory of helical antennas. Unless a great deal of time and care is taken in the construction of highly loaded antennas it might be better to dog-leg a full-length wire into the available space.

Operating

With modest power to a dipole, technique plays a great part in making yourself heard. It is unlikely that the dx will get a sufficiently strong signal to hear you above everyone else, so it comes down to making yourself heard among everyone else. Even so, there are times when a pile-up becomes so chaotic that you have to accept the fact that there is no chance of getting through. It is worth remembering that the guys with the towers and beams will be chasing the real exotica, if about, which can often leave the more mundane (to them) dx scratching around for contacts. It can pay dividends to find out when a dxpediton to a really rare spot is on the band. Not that you'll be trying to get through the resulting fracas, but with the world and his wife all heaped up on one frequency you would be surprised what can be found elsewhere on the band.

Operating times can play a large part in successful dxing. There is a well-known peak in propagation around sunrise and sunset, often referred to as greyline propagation. Details of calculating greyline paths with or without the use of a home micro are given in [11] [12] and [13]. In addition [13] gives details of the mechanics of the mode. One mechanical aid to finding greyline paths [14] consists of a world map plus overlays for each month with notes as to its use. Incidentally, for those who would like to expand their knowledge of propagation I would recommend [15] from the library. Much of it would only be of interest to professionals, but that still leaves a wealth of information and further references of use to amateurs.

With most amateurs aware of the benefits of being around at sunrise and sunset, the bands are usually quite busy then, but fortunately there are a couple of dodges to get around the crowds. At sunrise, Europe has full sun-up shortly before the UK, so consequently conditions start to fade for Europe slightly sooner than ourselves. The short time for which the UK still has dx propagation can sometimes be used to advantage.

The time of sunrise and sunset varies throughout the year. Since most people have difficulty in getting up early, anyone who manages to be on 7MHz by 0500gmt in September will find the band full of dx with few takers. As winter approaches, sunrise gets later and the competition increases with breakfast tv timehash as the *coup de grâce*.

If early mornings are out of the question, then 0000 to 0100gmt is a good time on lower frequencies. Most of the bc QRM on 7MHz seems to go away and receiver front-ends have an easier time. The 7MHz band is often thought of as pure noise, but most of it is generated within the receiver, and judicious use of a 20dB attenuator can work wonders.

With sunspots few and far between, conditions on the hf bands will be patchy for the next couple of years, but fortunately the lower frequency band conditions are superb during the winter months. They will not be this good again for another 10 years, so it pays to make the most of it. In addition, why not give cw a go? High speeds are not necessary and 15 wpm will do fine, although I would recommend the purchase of a cw filter. I first started using cw seriously several years ago when a bout of laryngitis prevented phone operation for several days, and now use it almost exclusively. It's a mode worth persevering with.

References

- [1] *Amateur Radio Operating Manual*, R J Eckersley, RSGB.
- [2] *HF Antennas for all Locations*, RSGB.
- [3] "Technical Topics" *Rad Com* January 1986.
- [4] R Benham-Holman, G2DYM, Uplowman, Tiverton, Devon.
- [5] SAGANT EL4OX. A compressed trap dipole, used to be stocked by a few UK dealers including Icom (UK) and ARE.
- [6] "80 metre dxing", ON4UN.
- [7] "Technical Topics", *Rad Com* February 1986.
- [8] "Technical Topics", *Rad Com* July 1986.
- [9] SLINKY. A helical dipole. Manufactured by The Blackshurg Group, PO Group, PO Box 242, Blacksburg, VA 24060, USA.
- [10] *Small Aerials*. Research Studies Press. ISBN 0 86380 048 3.
- [11] "Computing Sunrise and Sunset". *Astronomy* April 1984.
- [12] NAO Technical Note 46: Royal Greenwich Observatory, Herstmonceux Castle, Hailsham, East Sussex BN27 1RP.
- [13] "Calculating Greyline Paths". *Amateur Radio* March 1986.
- [14] DX-EDGE. A greyline calculator stocked by the RSGB.
- [15] "Propagation in Ionised Media". *CCIR Proceedings*. ITU. ISBN 92 61 01441 0. Dewey system No. 538.56/104 (82) (V1).

MAKING PRINTED CIRCUIT BOARDS – A DIFFERENT VIEW

John Case, GW4HWR*

Sooner or later most home constructors find the need to make their own pcbs, and will probably use the methods that are so often described in various magazine articles. Here are some ideas of a different method of making professional-looking boards, and details that enable some of the equipment required to be built at low cost.

FOR MOST OF US the first attempts to make a pcb involve taking a piece of copper laminate, cleaning it carefully by means of fine wire wool or a special abrasive rubber, and then putting on the foil pattern by means of an etch-resist pen. This is relatively quick but cannot produce the fine detail required by most modern circuits.

The next step would be to lay down the foil pattern by the use of rub-down transfers which form a good etch resist and also allow the pattern to be laid down with a fair degree of neatness and accuracy. This method is slow and requires considerable patience (a commodity usually found in home constructors), but when copying a foil pattern from a magazine the actual method of transferring the pattern is quite difficult.

After considerable work using either of the two techniques, the board is etched and, hopefully, a successful pcb is produced, but things do go wrong; eg the etch solution is exhausted or polluted, the etch resist comes off during etching or, worst of all, the circuit has been laid down as a mirror image. The board is useless but, more important, all of the time and work in preparation has been wasted.

The photographic method of preparing and making a pcb avoids most of the problems and is not nearly so difficult as many people believe. The process involves producing a positive transparency which is placed in contact with a photo-sensitive board and exposed to ultra-violet light (Uv). At the end of the exposure, the board is developed in a simple solution in which the exposed areas of the photo-resist material are washed away leaving the foil pattern covered in resist material. After washing in cold water the board is etched in the normal manner. If there is a mishap, as previously mentioned, or if components need to be added or connected in a different way, the original transparency can be modified and another board produced with very little extra work.

Most constructors are unable to make use of this process because they don't have a suitable Uv light source. Sunlight can be used, but it is slow and variable, so that it is almost impossible to judge the correct exposure. A Uv light box designed for the above and other applications can be built for about £15 (the cost of buying two average prepared boards) compared with about £60-£70 for an equivalent commercial unit, and is described fully later.

Producing the transparency – Method 1

Use rub-down transfers onto a polyester drafting sheet that is Uv clear – in other words, ultra-violet light will pass through it. I prefer to use sheets carrying a 0.1 by 0.1 in graph matrix which makes it much easier to lay out the circuit, especially when designing your own; the graph pattern does not print when exposed to Uv. Drafting sheets are obtainable from a number of suppliers of pcb materials. The one I use most often is that sold by RS Components or their mail order connection Electromail. It appears rather expensive at about £6 for a pack of 20 A4 sheets, but a pack will provide a large number of transparencies. If drawing up your own circuit, lay it out from the component side of the board so that, when printing, the symbols will be against the photo-sensitive material. If a diagram from a book or magazine is being copied, it will be easier to copy the foil

pattern by laying a piece of drafting sheet over the diagram, holding it in position with small pieces of pvc adhesive tape and rubbing down the transfers to cover the pattern below. When this is printed the symbols will be separated from the board by the thickness of the sheet and some undercutting by the Uv will take place. This will not matter except when very thin lines are being used, and a way to minimise the effect will be mentioned later.

When buying rub-down transfers it is important to obtain those which do not crack or pickup those pieces already laid down when other fresh items are being rubbed down. This latter effect can be most frustrating when a fairly high density pcb is being drawn up. I prefer transfers of a tougher plastic nature, such as Alfac, to those supplied by RS Components. These are obtainable in many different shapes and from most radio component retailers. The actual types used obviously depends on personal preferences and on the kind of circuit being produced. Those I use most commonly are shown fullsize in Fig 1 together with the Alfac reference number. Keep completed parts of the work covered as far as possible to prevent damage by the sticky backing of the transfer sheets.

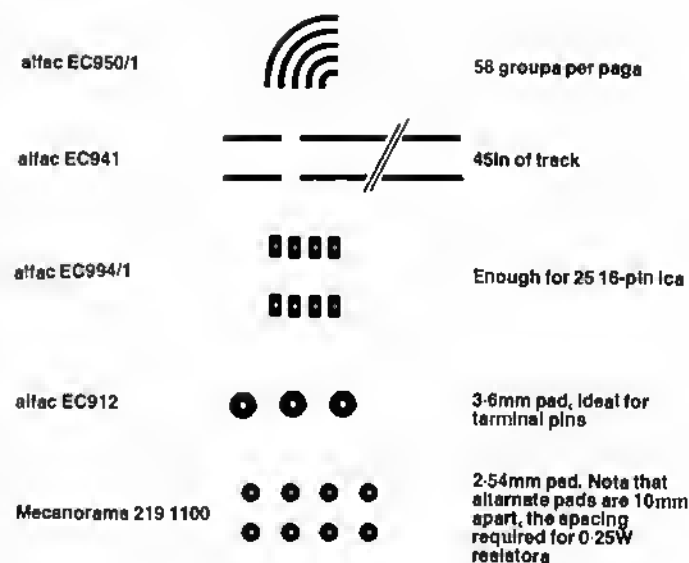


Fig 1. A selection of transfers shown full-size

In addition to the transfers, pens with waterproof and opaque ink are very useful. Staedtler Lumocolor 313 (very fine) and 317 (medium) are very suitable and are obtainable from most office stationery retailers. The fine pen can often be used with a straight edge to lay down straight track and the outlines of large areas that need to be made opaque. It can also be very handy when small cracks and other damage need to be repaired; in spite of all the care you take, some damage will occur so just keep the patience going. The same pen is used to prevent the undercutting previously mentioned when the foil pattern is being traced from a print. This is done by reversing the completed drafting sheet and carefully covering the reverse of the thin tracks using the fine pen.

Other useful tools are a fine pointed knife or scalpel and a typewriter rubber (in the form of a pencil). The knife is used to cut straight track and curved transfers (while still on the backing sheet) to appropriate length and for removing any transfer or ink incorrectly laid down. The rubber is excellent for cleaning up an area after corrections have been made with the knife. Keep rubbing down the pattern already laid down with the special backing provided, using the rounded end of a pencil. You will find

*2 Abbey Close, Tyrlhiw, Taffswell, Mid-Glamorgan CF4 7RS.

that a medium soft pencil is better for rubbing down the transfers than a ball point pen which tends to split them. Large areas can be filled in using the medium pen and if difficulty is met in getting completely opaque areas, again turn the sheet over and repeat the fill-in on the reverse side of the transparency. When the foil pattern is complete, mark any terminal pins, eg IN, OP, LO etc, using alpha-numeric rub down transfers (Letraset). This helps the process of putting in the components at a later date and also makes life easier when connecting up. Also add your callsign, making sure that it will be the correct way round when printed. This is not just pride, it also serves as an indicator when placing the transparency on to the copper laminate. Now hold the completed positive up to the light or, better, lay it on an ordinary light box, if you have one, and examine it carefully for cracks in the pattern and repair as necessary. If you intend making a number of boards to the same pattern, it would be a good idea to make a more permanent copy as described later.

Hold the transparency so that the foil pattern is the correct way round, ie your callsign is right and lay the face you are looking at down onto the glass of the UV box. Take a small piece (off-cut) of photo-resist pcb and peel off the protective coating; avoid bright sunlight, normal daylight will not harm the coating. Lay the piece down on the transparency so that it covers a dense portion of the pattern and, of course, with the emulsion side down. Now make a test exposure, usually about 5-6min is necessary when using the light box described and RS drafting sheet. Develop in a solution of sodium hydroxide made by dissolving 25grams of caustic soda in one litre of water. Any friendly chemist will make this up for you, or if you wish to make it yourself, ask for industrial caustic soda and dissolve 25 grams, about four heaped teaspoons, in one litre of cold water. Take great care, the crystals are very corrosive. Replace the lid of the container tightly as the crystals are deliquescent (they absorb water) and the whole lot will become solid. The solution is mildly corrosive, so keep it off your hands and clothes. Use plenty of water to remove any that gets in the wrong places. After about 30s the image should appear and the etch resist will be washed from the clear areas. When the copper appears to be clear, wash the piece thoroughly in cold water, gentle rubbing with the fingers during washing helps to remove any redundant resist. Now examine the test piece carefully. If the pattern of the grid is clearly visible, the exposure was too short although small patches of faint grid will be etched away in the ferric chloride solution. If the strips on the board appear to be thinner than on the transparency, the exposure was too long.

Cut a piece of photo-resist pcb about 5mm bigger-all-round than the transparency, drill a small hole as close to one corner as possible and remove any burr. Strip off the protective coating from the board and carefully align the transparency in the centre of the photo-resist side, making sure that it is the correct way round. Two small pieces of Sellotape may be used to hold the two together, then lay the combination on the glass of the UV box so that the transparency is against the glass. Time the exposure carefully.

Develop, and wash very thoroughly as before. It is important to keep the board wet until it is put into the etch bath, otherwise resist residue will dry on the surface and prevent correct etching. If the etch bath is deep, tie a piece of pvc "hook up" wire through the hole to make it easy to remove the board from the etching solution. Return the sodium hydroxide to the bottle, as it can be re-used many times.

Method 2. Photo-copy

This is suitable for foil patterns published in books and magazines. If the design is not exactly right for your needs, minor modifications may be made by whitening out the areas to be changed with type-writer correction fluid, and replaced with transfers or pen as previously described. If you do not wish to deface the original (it may not be yours) have a photocopy made and modify the copy. When satisfied that the pattern is that required, have another copy made but this time ask for a transparency. This is the same as any other copy except that it is made on transparent "paper". Most professional copiers will provide such a copy, but the price is a bit more than the standard. Don't be tempted to print this on photo-sensitive board; it is not dense enough and the resulting pcb will be patchy at the best. A good and very durable copy is now made using Reprofilm film. This is an orange-coloured film that can be handled for short periods in ordinary room light, but in the long term is stored under light proof conditions like any other photographic film. When the film is exposed to UV light and developed in a special solution, the exposed areas become clear and the unexposed parts turn black. Cut a small piece of film about 1 by 2in and return the remaining film to its envelope. Lay the photocopy on the glass plate of the UV box and put the piece of film over a densely-populated part of the pattern, close the lid and expose for about

2-3min. The developer can be applied by means of a small wad of cotton-wool. Wipe both sides gently.

The pattern will appear almost immediately. There is no advantage in prolonging the development, wash the piece carefully in cold water. Hold the film up to the light and examine carefully. The clear areas should be clear, and the black a deep purple. If the clear areas are muddy the exposure was too short, and if the black parts only moderately dark or patchy the exposure was too long. When the correct exposure is found it should be remembered as it will be constant for other transparent copies when using your own light box. If during the washing process the print comes off, don't worry, as this is only the top layer and gentle rubbing with the fingers will remove the rest of it. If you are careful and sparing with the wash, the problem will not occur and a denser copy will result. The whole diagram can now be printed using a piece of film a little larger than the foil pattern. After washing, pin one corner to the edge of a shelf and allow to dry or speed up the process with the aid of a hair dryer. When dry, the transparency can be used to print the photo-sensitive pcb; an exposure of about 3min would be necessary, although it would be a good idea to make a test using a small piece of board. Again the time will be constant for a particular type of pcb.

If minor alterations need to be made in the photographic copy they can be done by carefully scraping off the black coating with the scalpel, but remember that the pattern is now on both sides of the film, then put in the new pattern by means of transfers or the Lumocolor pens. As already mentioned, the Reprofilm copy is very durable and if a number of identical boards are to be made it is a good idea to make a copy of a pattern laid out on drafting film, as this is very easily damaged. It must be stressed that printing with Reprofilm film is very simple and there are none of the problems that are met with ordinary photographic processing; in fact, it is easier to make a copy than to produce the pcb! One problem does occur, however; the film and developer are easy to obtain but in rather large and expensive quantities. Instagraphics Products Ltd will supply a pack of 10 A4 sheets of film and a one litre bottle of developer for about £25. This quantity will make 40 to 50 medium-size pcb foil patterns. I would suggest that a number of people should get together to buy a pack and to divide it up. The same firm will also supply an excellent range of rub-down transfers and drafting film. They will provide a full catalogue free of charge, when writing, request also the Mecanorma catalogue of artwork aids.

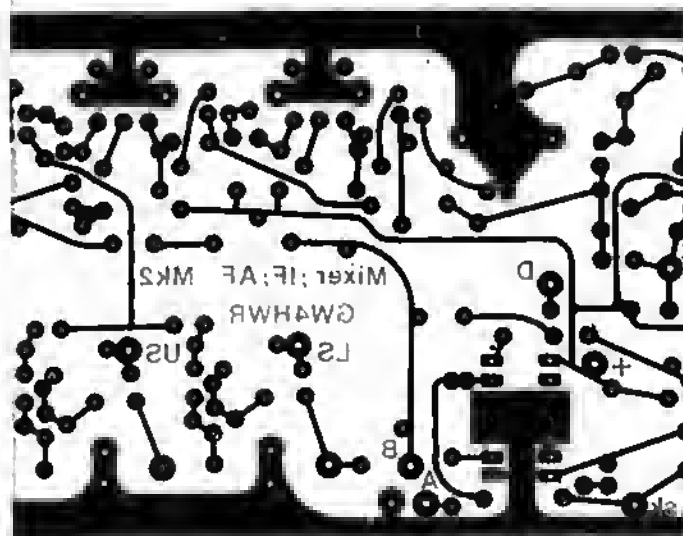


Fig 2. A finished transparency on drafting film. The side shown should be in contact with the sensitive side of the pcb material. The legend etc are mirror image and are on the reverse side

Method 3. Copy on to drafting sheet

This is the easiest way of making a transparency from a printed foil pattern, but requires the facility of being able to put a piece of A4 drafting film into the copier. Put the drafting paper on to the top of the paper in the magazine and then print in the normal way. An excellent copy will result which can be printed in the UV light box on to photo-sensitive pcb.

Double-sided boards

These are no problem when the UV process is used. Take a strip of pcb material a little longer than the foil pattern and about 0.25in wide. Use small pieces of Sellotape to attach one transparency to the strip so that it is just outside the pattern area. Hold the other to the other side of the strip and adjust the position until the correct holes coincide, then fix to the strip. Remove the protective coating from both sides of the pcb and slide it in between the two transparencies. Again fix with tape and expose both sides to the UV light in turn.

The light box

This is a very simple device requiring very little skill other than the ability to make a wooden box. The dimensions given are not very critical and may be modified to accommodate a large choke than the one quoted. The window area should not be made any bigger as it would then be possible to put boards and film in a position of reduced illumination.

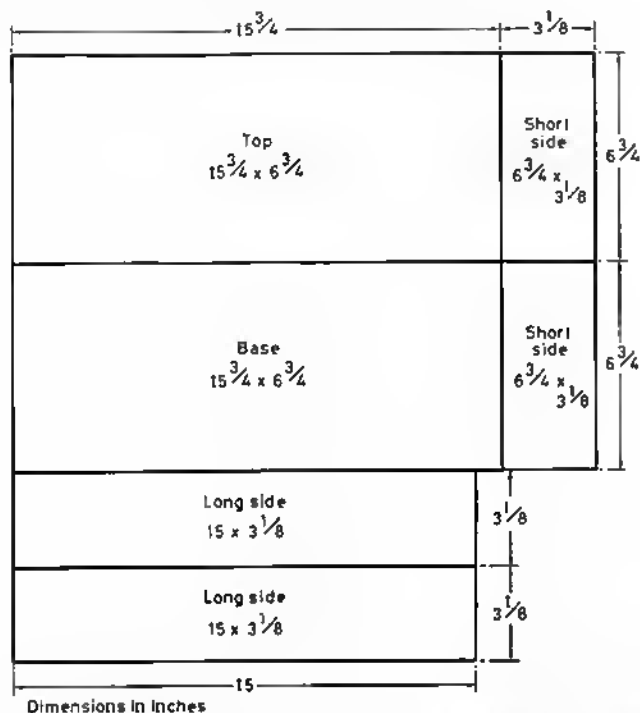


Fig 3. Cutting plan. Note: dimensions are only correct if material is 3/8in thick

Many would-be cabinet makers avoid making boxes because of the difficulty of making the top fit the bottom. This problem can be avoided and a top produced that will fit, even if the box itself is rather mis-shapen. Top and bottom are made up in one piece then the top is sawn off. If you are lucky you may be able to convince your diy supplier (especially if he is a builders merchant) to cut the six pieces for you. If not, a piece of 3/8in (actual dimension) ply about 21 by 20in will be required. Cut the pieces as accurately as possible and clean up the edges with a plane. Mark the top edge of all four side pieces and then draw a line exactly 0.5in below the top edge. Also draw a line on the outer surface of the top and bottom, 3/8in from each edge which will act as a guide for the nails. Use a good woodworking glue. (I prefer Cascamite made with a little less water than

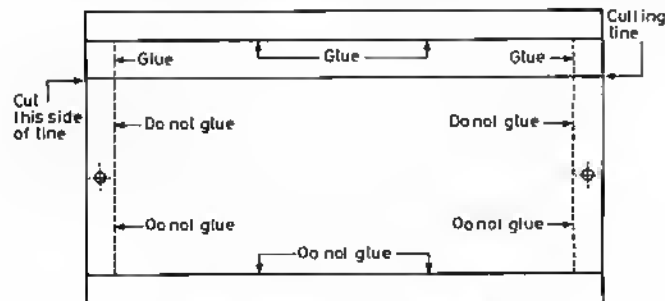


Fig 4. Showing the non-glued edges

recommended), and 0.75in panel pins. Note: 1in pins are too long and will foul the saw when the top is sawn off later. Starting with the top, drive pins (in the centre of the 3/8in strips) through the long and short edges so that they just emerge on the other side, a spacing of 3in is about right. Do the same with the bottom.

NOTE. The lower part of one short side must not be glued (see Fig 4) as this piece must be removable to allow access to the tubes and starters etc.

Coat the top of one short side with glue, align the top with the side and drive in the nails. Before the heads disappear, check the alignment and if not correct withdraw the nail with pincers or pliers and repeat moving the nail a little to one side of the first position. When satisfied that all is correct, hammer the nails right in. Next coat the top edge of one long side, bring the top and short side into position, making sure that there is no gap between long and short sides, and drive the nails in. Now coat the top edge of the second short side and top 0.5in only of the two long sides and nail. Do not drive the nails in the lower part of the short side all the way. Leave 1/8in protruding so that they can be removed later. If you have not already done so, nail the other corners but do not put nails closer than 0.25in of the line drawn 0.5in from the top.

Now glue and nail the bottom. Once again leave the nails in the unglued short side protruding. Wipe off any excess glue with a damp cloth. The next job is probably the hardest part. Leave the glue to set; at least overnight! When dry, tidy up the edges with the plane or rasp and sandpaper. Now cut off the top. Hold the box as securely as possible. If you have a Workmate-type bench it should be no problem, or perhaps you could borrow one for this task. If not, hold the box as tightly as possible. Starting at the short end which is not glued at the bottom, saw just to one side of the line drawn 0.5in from the top edge. It is now 1/2in from the top because of the top board. Try to keep the line just visible and saw very slightly below it so that the inside depth of the top is a full 0.5in deep. Turn the box as necessary and continue sawing. If it is necessary to clamp across the depth of the box make sure that the gap already sawn is not squeezed together. Put in pieces of card or pcb to keep the gap open and so prevent the saw jamming. Take special care when the cut is almost complete, hold the top so that as the last bit is sawn it does not break away. Clean up all the edges with plane, rasp or sander.

You should now have a box with a fitting lid. Using a small drill (2mm or No 44), drill holes in the centre edges of the unglued short end; right into the sides. See Fig 4. Remove the nails that are sticking out and gently tape the side piece out.

The hinges are let into both top and bottom so that there is almost no gap when the lid is closed. The recess can be cut with a coarse file. Drill a 0.25in hole in the right-hand short side about 1in from front and bottom for the mains lead. The mains switch should now be fitted about 1.5in from the right-hand edge and 1in from the top edge. The exact position and size of hole will depend on the type of switch chosen. Make sure that it is a mains type, preferably double pole and, if possible, with a built-in neon indicator to show when the light is on. Alternatively you could use a separate indicator.

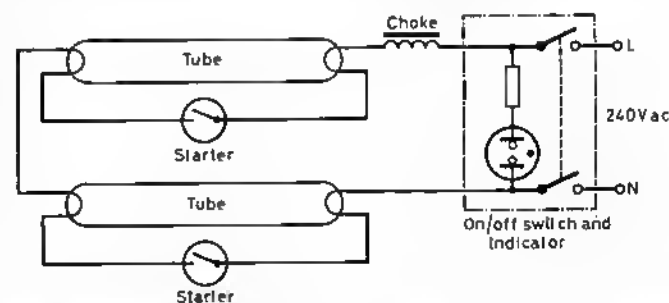


Fig 5. Showing how two 8W tubes are connected to a common ballast choke 13W

The choke, starter lamp holders and lamp holders (or Terry clips) can now be fitted in accordance with the dimensions given in Fig 6. If Terry clips are to be used to hold the tubes rather than batten type tube holders, the centre of the tubes should be about 0.75in above the floor of the box. If less than this, use spacers under the Terry clips. I used DBA full nuts for this purpose. Check that the tubes together with their end connectors will fit, and then remove all parts from the box. Cut a piece of kitchen foil the same size as the bottom of the box, try to keep it free from creases and using dilute glue or wallpaper paste, glue the foil in the bottom of the box with the shiny side facing up. Smooth out as far as possible and press the foil over the component fixing holes with a finger to locate the screws

later. While the glue is drying locate the components in their approximate positions and wire up as shown in Fig 6. It is much easier to connect up this way as space inside the box is rather limited. Use mains-grade insulated wire. The inners of mains flexible cable would be in order. When the glue is dry re-fix the components in the box keeping the wires in the corners as far as possible. Fix the on/off switch and connect a 1.5m length of two-core mains lead. Connect the output side of the switch to the choke etc. Use a small cable clamp to prevent strain on the switch when the cord is pulled. A 13A plug top fitted with a 3A fuse completes the electrical installation which may now be tested. Note: the output from the 8W tubes is relatively harmless but do not leave switched on without the top in position and do not look closely at the lamps for more than a few seconds.

To get a professional finish the box can now be covered. A local bookbinder can usually supply thin book cloth which is ideal. Use carpenter's glue and allow an inch to turn in at the edges.

Enlarge the two holes in the small free end to accommodate 0.75in self-tapping screws. Fit the hinges and small catches so that there are no undue gaps between top and bottom. Cut two pieces of plastic sliding door channel to fit inside the long edge of the box. Screw and glue the

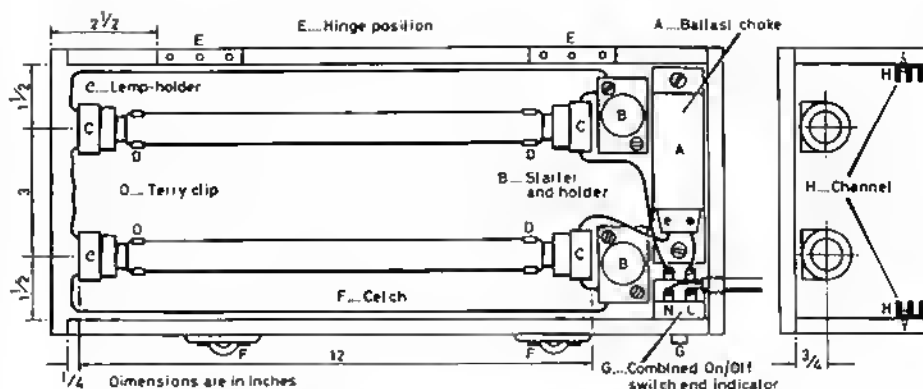


Fig 6. Layout of components and critical position of tubes

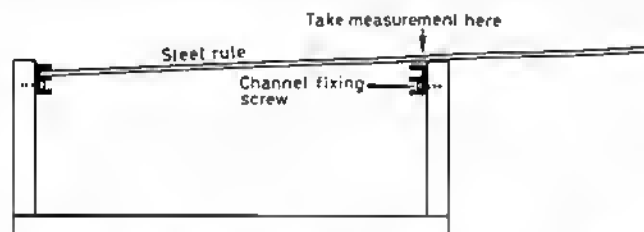


Fig 7. Measuring the required width of glass

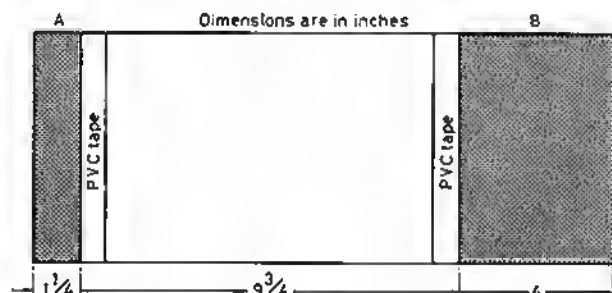


Fig 8. Masking the glass and area to be painted

Materials and useful addresses

Drafting film and rub-down transfers: RS Components (Electromail), Instagraphics Products Ltd, or Cirkil.

Reprofile positive film and Reprofile developer: Instagraphics Products Ltd, Instagraphics Products Ltd, Ashfield Industrial Estate, Low Hall Road, Horsforth, Leeds LS18 4EF.

Electromail, PO Box 33, Corby, Northants NN17 9EL.

3M: Graphic Arts Group/3M, 3M United Kingdom PLC, 3M House, PO Box 1, Bracknell, Berkshire RG12 1JU.

This last address is very useful. Once you have a UV light source, lots of other processes become possible. Fancy labels is one. Write asking for details of Photolabels. They will give you details of local stockists and will probably send some samples and very nice illustrations of the type of label you can produce.

Light box parts

Two 12in 8W UV tubes TL @ £2.45 £5.90

Two starters @ 35p 70p

Two starter holders @ 40p 80p

One 13W choke (Optima) £2.60

All above from electrical wholesaler. Prices quoted are those paid by the author and do not include VAT.

Four Terry clips @ 12p 48p

One piece of book cloth 1 by 1.5m £1

One piece of 0.75in foam 30 by 12in 50p

3/4in ply, 0.75in panel pins, hinges and catches all in junk box

RADIO COMMUNICATION March 1988

channels so that they are almost level with the top. The 3/4in screws should be in the lower slot.

Use a steel rule to measure the distance between the bottoms of opposite pieces of channel. Check at both ends and in the centre and use the smallest measurement. Measure the length between the short ends and obtain a piece of 3mm or 4mm glass with these dimensions. Measure very carefully and reduce the width by about 1mm to make sure that it will slide into the top groove of the channel. Mask the glass as shown in Fig 8 and paint areas A and B using black paint. When dry, remove the tape. Slide the glass, painted side down, into the top slot of the channel and fix the loose end into position.

Finally cut a piece of soft 0.75in foam to fit inside the lid and hold in position with a few spots of glue. The foam acts as a pressure pad to hold the transparencies and film/pch together. The box is now complete. □

TECHNICAL FEEDBACK

"A QRP transceiver for 1.8MHz", S E Hunt, G3TXQ. *Radcom* September 1987, p654.

In response to requests from constructors who wish to have the frequency to 3.5MHz, the author has supplied the following revised component values:

C27, 29 220pF silver mica.

C28 18pF silver mica.

C49 56pF silver mica.

L1,2 30t on T68-2 core tapped at 4t from ground.

L5 30t on T68-2 core tapped at 7t from ground.

Remove C26 and C30

Coverage will be approximately 3.6-3.8MHz.

A number of correspondents have had trouble in finding cores for T1,2 and T3,4. Alternatives to those specified can be obtained from Electrovalue Ltd, these are:

T1,2 Electrovalue Part No.K0038X830 ring core.

T3,4 Electrovalue Part No.A0004X030 twin hole bead.

"Reduction of rf breakthrough from the BBC microcomputer", J C Worsnop, G4BAO. *Rad Com* December 1987, p906.

Mr R Broadbent, G3AAJ, secretary/treasurer of Amsat-UK and editor of *Oscar News*, has pointed out that details of the "professional" zinc spraying, and many of the modifications in the article were included in a note available to Amsat members published in 1983. Many of the hints and tips were passed to me via the amateur radio "grapevine", and I was unaware of the published note at time of preparation of the article. He is not suggesting that the article should not have been published, and in fact has included the following extra information which may be of interest: "The price for the Decco spray zinc process is £20 plus VAT; the company will mask the cases, and refurbish them after spraying". He agrees that the main sources of radiation after case spraying are the connecting leads. In the original note it was stated that the plug top would not pass through the hole in the case, I still maintain that mine did!

G4BAO

Technical Topics

Pat Hawker, G3VA

FIRST THIS MONTH, I must thank the many readers who took the trouble to write and express their conviction that there is still a place for *TT* in its established form in which both new and "old" (but potentially useful) technology finds a place. Rather to my surprise there were no contrary views, at least in the letters sent to me. It is primarily a matter for editorial rather than contributor decision and it would be unkindly self-indulgent to quote many of the letters; but, for example, L N Buck, G0DLR, shares my concern over a too uncritical acceptance of microprocessors built into transceivers for amateur radio, no matter how useful they may be for commercial and military circuits where the criteria are different and the contacts are not made for the interest and enlightenment of the operators.

G0DLR writes: "That microprocessor-controlled equipment is easy to operate is undoubtedly true, especially with solidstate power amplifiers and linear amplifiers that automatically tune themselves. However, when tuning and loading my old-fashioned FT101ZD with its unpunctured valve output stage, and my equally outdated homebrew linear with its incredibly ancient 813s, I am in control of the equipment and do have a fair idea of what goes on inside; unlike, I suspect, a lot of the owners of the latest 'automated' equipment which does practically everything except hold the QSO (The latest generation of adaptive automatic hf radio systems developed for commercial/military applications by Plessey and Rohde and Schwarz does even that in designing the operator right out of the system - G3VA). Making radio gear so easy to operate is without doubt brilliant technology, but puts its construction and design beyond the abilities and pockets of all but a very few, and if equipment becomes so 'clever' that its adjustment and maintenance by the operator becomes unnecessary, one might as well use the telephone, which can give worldwide communication at a fraction of the cost."

"One of the features of modern equipment that intrigues me is the proliferation of memories. Do people actually find uses for these? Some years ago I was able to acquire at bargain price a remote digital vfo for my FT101ZD, and this is festooned with memory buttons. I'd love to be able to justify them! The vfo is occasionally useful but most of its life is spent shining alongside the rig with its display and l.e.d.s glowing and looking impressive!"

In looking this month at some aspects of microprocessor-controlled transceivers and receivers I would also stress that such techniques require the use of synthesizers, which in the low-cost amateur-budget firm place a finite limitation on performance in terms of near-in dynamic range, and often on the not so near-in. Purchasers need to balance the operational convenience against critical on-air performance.

Tomorrow's equipment

The recent items on the high-performance "ultimate" hf/mf/lf receiver developed by Ray Hawgega, G4DTC, have indicated that current, factory-built equipment designed for the budget-limited amateur market still involves a number of significant compromises, some demanded by features that many (though not all) have come to accept as essential. G4DTC highlighted problems stemming from all-solidstate front-ends with broadband pre-mixer selectivity, pll frequency synthesis, digital noise arising from inappropriate layout/inadequate screening/filtering of digital frequency read-out etc. He solved these problems by not using a pll synthesizer, by the use of two thermionic devices (PCC189 envelope rf amplifier/7360 beam-deflection mixer) and free-running Kaliturn hf local oscillator and no microprocessor control systems, while emphasising that it is not sufficient simply to use such configurations without very careful consideration of such traditional factors as gain distribution, gain-control and pre-mixer selectivity.

Coincidentally, the annual "receivers issue" of *Ham Radio Magazine* (November 1987) included two important articles on modern receiver design. Robert J Zavrel, W7SX, in "Tomorrow's receivers: what will the next 20 years bring?" refers to many of the same problems noted by G4DTC but forecasts that these may be gradually overcome in future by using new technology that has still to impact on amateur receivers and transceivers.

concentrating on increasing the dynamic range of mixers by the use of improved passive ring mixers in which a number of diodes are paralleled in order to improve their strong-signal performance. Such devices are costly and also require a great deal of local oscillator power. For example, to handle an rf signal of 100mW the oscillator output needs to be at least 1W, since a ring mixer needs roughly 10 times the rf signal power to achieve optimum results as a linear commutation (switching) mixer, preferably with the drive in the form of a near square-wave signal.

W7SX sees one solution to this problem in the use of the integrated passive fct ring mixer as exemplified by the Siliconix Si8901. This was described, following the receipt of information directly from Ed Oxner, KB6QJ, of Siliconix, for the very first time in any amateur radio journal in *TT* March 1986, and also in my contribution to IERE Conference Book No 64, July 1986 "Dynamic range: fact or fiction?" W7SX writes: "With this device, gate voltage rather than a forward-biasing current turns the switches 'on' and 'off'. Since the gates represent high impedances, voltage/power ratios can be increased, thus lowering the local oscillator power requirements dramatically. Indeed, to handle the same 100mW rf power of our diode ring example, the Si8901 requires about 25mW of local oscillator power instead of the 1W mandated by the diode rings. The other critical specification is the third-order intercept point, which is necessary for defining the useful dynamic range. Again, the Si8901 greatly surpasses the diode ring mixer."

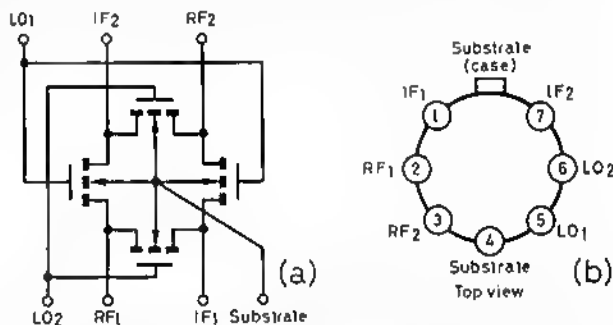


Fig 1. Siliconix Si8901 ring demodulator/balanced mixer: (a) Functional block diagram; (b) Pin configuration with Si8901A in TO-78 and Si8901Y as surface-mounted Sot4 configuration

In *TT* March 1986, KB6QJ reported his experimental Si8901 mixer with a resonant-drive transformer as achieving third-order intercept points of +39dBm (input) with only +17dBm of local oscillator power. Others had reported third-order intercept points of over 40dBm presumably with increase of oscillator power. Figs 1-3 are taken from the Siliconix publication "Designing a super-high dynamic range double-balanced mixer" which incorporates the Siliconix Application Note (AN85-2) on this device. As mentioned in *TT* August 1986, this is available from the Publicity Department, Siliconix Ltd, Morriston, Swansea AS6 6NE (tel 0792 74681). A recent enquiry indicates that this device is available both in a conventional can mounting as the Si8901a, and as a surface-mounted device. In small quantities the Si8901a costs just

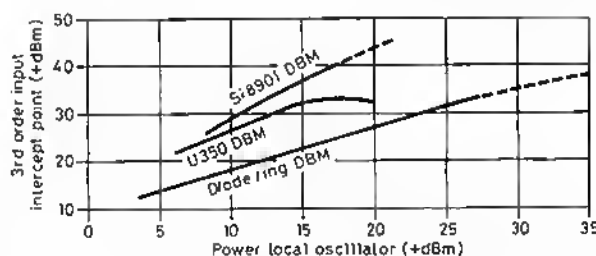


Fig 2. Performance comparison between Si8901 dbm, U350 fet active dbm and diode ring dbm

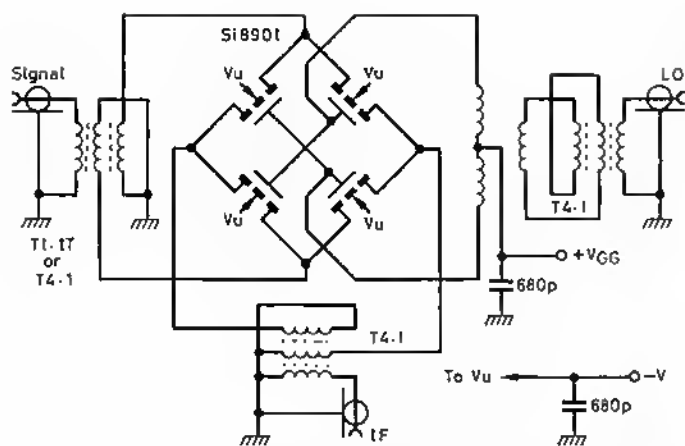


Fig 3. Ed Oxner's prototype commutation double-balanced mixer as described in the Silicnix application notes

under £13, which puts it in much the same price bracket as the 7360 mixer (you can't expect to be as lucky as G2AUB who admits to once buying three 7360 valves for three shillings!). W7SX believes that the Si8901 should also make an excellent active mixer, using the same concepts as for the old U350 jfet devices.

W7SX considers that synthesisers offer distinct advantages in that they can be directly controlled by microprocessors and do not require special mechanical rigidity or moving parts, but admits that at present it is difficult, if not impossible, to duplicate the permeability-tuned oscillators of the 'sixties with pll synthesis, given the constraints of typical amateur budgets. He notes, however, that another type of synthesiser – the "direct digital synthesiser" – holds great promise for the future. It is also possible that synchronous oscillators, as in the old-style synchrodyne receivers, may provide a solution.

Microprocessors in receivers

In the same "receiver" issue of *Ham Radio* (November 1987), another well-known designer of advanced military hf receivers, Professor Ulrich L Rohde, KA2WEU/DJ2LR, contributes an article "Designing a state-of-the-art receiver", sub-titled "Readily understood – though not greatly utilised – concepts mean better performance". In this he stresses: "The state of the art in hf receiver design using semiconductors has improved greatly. The use of either CATV-type transistors (ie transistors developed specifically for the distribution amplifiers in cable television networks) and double-balanced mixers using hot carrier diodes or double-balanced mixers with switch-type fets have eased the large-signal handling problem of just a decade ago."

But he adds: "One weak link in the chain, however, remains; this is the synthesiser, with its inherent noise contributions. To a large extent the overall architecture of the receiver and the synthesiser determines the performance, and even the best high-performance components – placed in the wrong sequence – can cause a good design to fail."

DJ2LR devotes much of his article to the use of microprocessors in receivers, although he carefully distinguishes between the essentials of high-performance receivers and the additional "bells and whistles" features made possible by microprocessor-controlled synthesisers: Fig 4. He notes that these features include improved user interfaces or computer interfaces for remote control. Since the commercial and amateur markets are price-sensitive and also very sensitive to proof of performance, any claims of lower capabilities are noticed: "Consequently, when on-the-air tests of some late-model receivers suggested poorer performance than previous models, this raised the question of why, despite the knowledge acquired in recent years, such an inconsistency should occur."

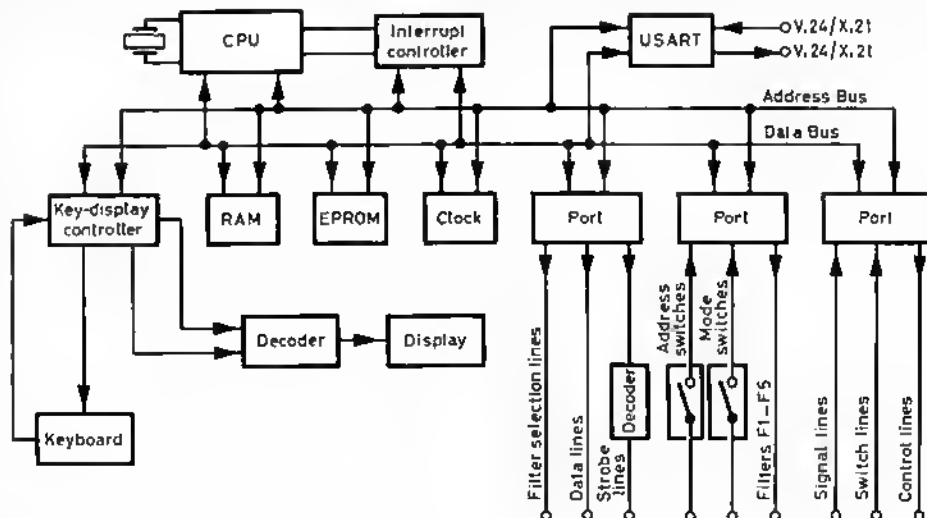


Fig 4. Architecture of the elaborate internet computer system found in modern professional fully-synthesised receiver (DJ2LR)

In effect, as I understand it, DJ2LR recognises that the inclusion of pll synthesisers in a high-performance, amateur-budget receiver, in order to provide "bells and whistles" features, still involves accepting some degradation of its basic performance as a receiver. It thus remains a matter for individual amateurs to decide which is the more important to them; the basic performance or the bells and whistles features.

DJ2LR notes that the sections of the synthesiser most vulnerable to picking up extraneous signals are the lines going into the output vco. Inexpensive solutions frequently lead to high-impedance feeding points which then become "antennas" collecting all the switching noise; another reason for noisy synthesisers is the use, in the synthesiser loops, of operational amplifiers that are too noisy. Either discrete low-noise amplifiers or Darlington stages should be used. Detailed analyses of the noise and jitter sources in pll synthesisers have been given in professional papers by such writers as Professor Mike Underhill, G3LHZ, and Peter Chadwick, G3RZP, in which they stress that on account of its basic simplicity the digital pll is likely to remain a major technique for frequency synthesisers in the years to come, while stressing that an acceptable compromise of low noise and good switching speed can be achieved *only by careful pll design*. For those who value near-in dynamic range etc, there is much to be said for G4DTC's advice that "synthesisers should be avoided like the plague" – at least in the highest-performance, hf receivers.

To do this would involve the omission of microprocessor control which, as DJ2LR points out, enables receivers to feature built-in clocks, frequency-scanning with variable scan rates, availability of at least 100 channels and channel scanning, plus a combination of receiver control functions such as the serial RS-232 or IEE-488 bus remote control capabilities. Because the bfo and the main oscillator are both synthesised, the combination of the two allows either passband tuning or variable bandwidth.

"Another area of interest in the use of microprocessors is the linearisation of the transfer characteristic of the tuning range of the oscillator and the linearisation of the S-meter. The microprocessor can also switch the tuning rates to correspond to the operating mode and select the appropriate bandwidth receiving crystal filters required for that same mode. Digital implementation of signal analysis allows demodulation of rty and morse code. Many other novel approaches are possible . . . One of the frequent mistakes made in this context is the use of only one microprocessor, which gets overloaded, or the use of four-bit microprocessors. In better radios, eight-bit microprocessors, which can handle all these functions efficiently, are used. The best approach is parallel processing."

Automatic receivers

In *TT* October 1987, I noted the Plessey work aimed at further de-skilling hf operation by using the increasing availability of low-cost computer power to develop an adaptive, fully automatic, hf radio system that can run unattended by any operators. Alan Williams, G3KSU, has sent along further information on this system (Fig 5) as published in the autumn 1987 issue of Plessey's *New Technology*. It is introduced as follows: "Historically, in order to establish an hf skywave link between two points, a pre-arranged frequency-time calling schedule, or a lot of luck, has been required. Assuming that the intended receiving operator is monitoring the correct channels, at the correct time, or using a large bank of receivers

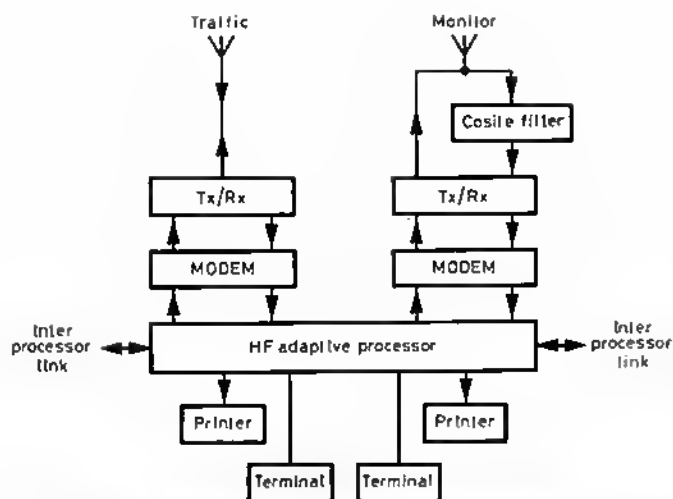


Fig 5. Station configuration of the Plessey automatic and adaptive equipment that finds and selects usable channels, makes contacts with other similar stations and passes traffic without requiring any operator to be in attendance

simultaneously, then the initiating operator would call on different frequencies, in turn, until a reply is received. This method requires skilled operators, and often a great deal of time, to establish a link. The links often fail during natural ionospheric disturbance, even though predictions can be calculated. The establishment and maintenance of communications, using skywave propagation, either without skilled operators or when the ionosphere is highly disturbed, requires an adaptive system with a linking protocol. Plessey Military Communications has designed and supplied its MoAd an adaptive system which is both simple to operate and requires a minimum of operator interaction to establish and maintain a network of links. Since each station in the network may be container mounted, if necessary, deployment is rapid and requires a minimum of setting up, prior to traffic transmission.

During 1987, Racal introduced a new range of "modular" receivers (types RA3701-4) for a wide range of professional and military applications that rely heavily on processors, three backlit crystal display panels and a four-key menu system to control up to 24 special features. The user is instructed how to proceed by messages in the display panel, and provided with elaborate "bite" (built-in test equipment) facilities. As equipment becomes more and more complex, the requirement for bite facilities becomes more and more important. The Racal system is claimed to operate at five levels:

- (1) Automatically at power-up providing basic processor module and memory tests.
- (2) Continuous monitoring of correct operation.
- (3) Operator initiated confidence check, providing a complete automatic self-test of all modules.
- (4) Fault finding, which calls up any of the automatic tests on request and includes signature analysis. Tests requiring manual intervention, such as remote control loop-back tests, are included at this level.
- (5) Factory test. The receiver cycles continuously through its automatic self-test. Results of the tests are displayed and faults can be investigated further using the bite menu facilities, instructions being provided to the operator at each step.

So there we are, some of the wonders of new technology of digital electronics and microprocessors for those with very deep pockets. But take your choice as to whether all this adds much to the basic interest of amateur radio operating with understandable technology; or comes down to computer talking to computer, with the operator, if any, as an unnecessary passenger.

Powering 12V equipment from 24V supplies

TT (November 1987, p835) included an idea from a reader of *Electronic Australia* on the use of a series of bridge-rectifiers, producing a constant voltage drop for varying loads, to enable 12V equipment to be powered from a 24V vehicle system. Both Jack Wootton, G0AWP and Steve Damon, G8PYP, have expressed important reservations about the technique.

G0AWP writes: "Although this is a novel idea, it has one serious drawback. While admittedly, unlike a ballast resistor, it will provide a constant voltage drop, irrespective of current drawn, it will not provide a constant output voltage when used with a fluctuating input voltage. While

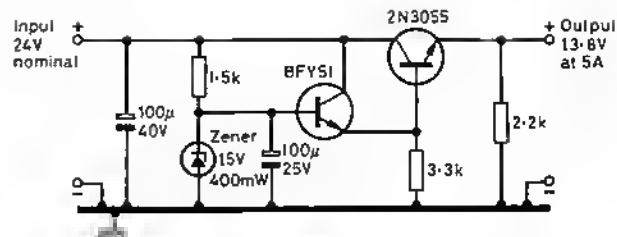


Fig 6. Stabilised voltage regulator suitable for supplying 13.8V equipment in 24V vehicles

this would not be a serious problem if used with a 24V battery not connected into a vehicle system, the supply voltages on vehicles having nominally 24V electrics can be well in excess of 30V when the engine is running, apart from any switching transients. In these circumstances, with a constant voltage drop of about 12V, the output from the diodes could be more than 18V, not to be recommended for a new £400 transceiver!

"I service radio and audio equipments installed in coaches and commercial vehicles, and know of many instances where even well-designed 24V equipment has been damaged by excess voltages, both transient and prolonged overvoltages. Some 24V equipments are fitted with a zener clamp diode across the supply (after the fuse), typically rated at 33V, 6W in order to avoid such damage.

"A much more satisfactory technique is to use a series regulator. The traditional Darlington arrangement with zener stabilisation as in Fig 6 is ideal, and is extensively used commercially. Such a voltage regulator need be no more costly to make than purchasing nine bridge rectifiers, and may even be cheaper; many junk boxes will yield a 2N3055 and BFY51 and on a suitable heatsink will easily provide 5A, enough for a typical 10W fm transceiver. The principal advantage is that it supplies a fixed voltage output irrespective of supply voltage fluctuations as well as load variations. There is this not the hazard involved in using a diode chain to power rigs in 24V vehicles."

Steve Damon, G8PYP, raises a different objection to the use of a diode chain formed from bridge rectifiers. He writes: "The Australian writer has fallen into the 'age-old' trap of using bridge rectifiers rather than single diodes, presumably in an attempt to increase the current rating. Consider a bridge rectifier as used in this application: Fig 7. The rectifier consists of four diodes D_A to D_D, with forward voltage drops V_{FA} to V_{FD}. In the real, non-ideal, world, each of the diodes will have slightly different forward voltage drops.




Fig 7. Diode bridge rectifiers have a maximum current rating when used as voltage droppers equal only to the rating of a single diode

"Then if, for example, we assume the voltages are: V_{FA} 0.58V, V_{FB} 0.59V, V_{FC} 0.60V and V_{FD} 0.61V, V_{FA} + V_{FB} is 1.17V and V_{FC} + V_{FD} is 1.21V. The result is that D_A and D_B will conduct, passing all the current, while the voltage across D_C and D_D will never be large enough for conduction to occur. Also, since D_A and D_B are connected in series, each will pass the full load current.

"The result is that the safe current rating of the complete rectifier block is reduced to that of one of the individual diodes. For a typical mobile application (3 to 4A load), it would be more economical to use, say, 18 MR750 (5A) diodes at 54p each, than nine KPC802 (8A) rectifier blocks at £1.37p each (prices taken from Farnell Electronic Components catalogue)."

It is perhaps worth noting that the use of either a series regulator or a diode chain represents an electrically inefficient system since one is drawing twice as much power (VA) from the 24V battery as is being used by the equipment, ie a maximum efficiency of only 50 per cent. This is not important in a vehicle in which the engine is running most of the time, but in circumstances where the recharging or float-charging of the battery presents a problem, a more efficient, though initially more costly, approach would be the use of a 24V/12V switched-mode d.c. converter which can have an efficiency of the order of 75-80 per cent or so for a well-designed unit.

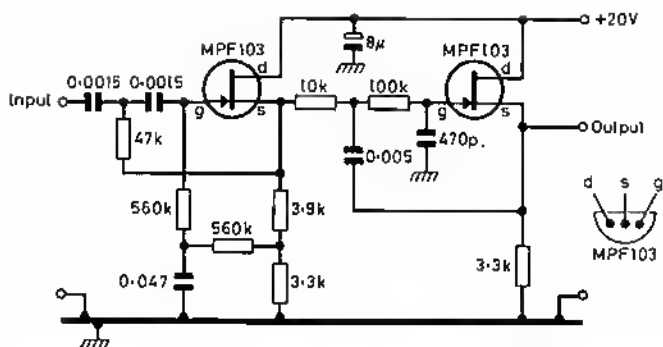


Fig 10. The ZL2APC active bandpass audio filter used by G4DTC to clean up the audio output, shown with amended values for the two source resistors

apparent increase in signal-to-noise ratio and improved readability of signals with high and low frequency heterodynes and audio chatter outside the filter passband noticeably attenuated making receiver operation a more pleasant task. If n-channel fets (eg 2N4360) are used, the polarity of the supply must be reversed.

"Digital frequency counters should be used with care in high-performance receivers. At worst, they can cover the entire spectrum with 'digital noise'. At best, they can produce some unexpected spurs. For example, the often used 7216A counter IC produces (in addition to its 10MHz reference oscillator) 500Hz harmonics (the display multiplex frequency) and harmonics of the 10MHz dividers (right down to 100Hz for the reference counter). Even if the counter is thoroughly screened, the display, clearly, *must* be visible somewhere! In addition, the counter will send its harmonics back down the lead which connects it to the receiver. Connecting a 7216 counter to an FRG7 receiver covered the entire spectrum with 100kHz markers! I note with concern that one *Rad Com* design has an unscreened 7216 chip on the receiver board only 3in from its rf wiring. Even when screened, low frequency, radiating eddy currents are induced in the screen!

"The resulting 'ultimate' receiver is capable of exceptional performance, particularly on the amateur bands even if operated with maximum gain. Broadband reception requires backing off the gain controls as there is simply too much gain. The rf amplifier, as noted in the December *TT*, can be operated at high loss to attenuate very strong signals without impairing the snr. The entire receiver has been constructed on double-sided pcb (including the two front-end valves) and looks decidedly 'state-of-the-art'."

Six-band QRP transmitter from BC348R receiver

During the second world war, many thousands of rugged, general-coverage communication receivers were manufactured for the US services. Of these the BC312, BC342 and BC348 were the best known and were among the most popular of the low-cost "war surplus" acquisitions by amateurs in the late 'forties. The BC312 was for operation from 12V dc supplies, the BC348 from 28V dc supplies. All three used 6.3V octal valves, mostly of the metal-octal type. With single-crystal i.f. filters they

had a respectable performance but, unfortunately for amateur use, they had no bandspread tuning and had a frequency coverage that stopped at 18MHz, necessitating the use of converters on the 28MHz band and also on 21MHz when this band became available as a result of the 1947 Atlantic City conference.

The BC348, for example, was a nine-valve superhet with two rf and three i.f. (915kHz) stages, usually with a valve line-up of 2 x 6K7 (rf), 6J7 (mixer), 6C5 (local oscillator), 6K7 (i.f.), 6F7 (i.f./bfo), 6B8 (i.f./demodulator), 41 (output) and VR91 (voltage regulator). There were two main groups having the same performance specification but differing in some circuit details; one group suffixed J, N and Q; the other suffixed E, M, P, O, R and S. Both groups were featured in a number of journals showing how they could be modified for amateur use with ac mains supplies, for example *QST*, January 1947 and November 1947.


The mechanical ruggedness of these war-surplus receivers and the continued availability of the 6.3V octal range of valves has meant that quite a few of these receivers are still in working order, although probably not very often in operational use. Del Arthur, G0DLN, has come up with an ingenious idea that may shock those readers who feel that all such receivers should now be regarded as "collectors' pieces" to be kept in or restored to their original form. He writes:

"I feel that some of your readers would like to know that it is amazingly simple to convert many second world war receivers into effective cw transmitters or transceivers with minimal effort. I have done this with a BC348R, and the interest generated on the air with this rig is enormous. The normal BC348R block diagram is shown in Fig 11 (a). Most users of this receiver will have increased the bfo coupling to improve the reception of ssb. It takes less than half an hour to convert this receiver into a stable QRP cw transmitter covering six amateur bands (1.8, 3.5, 7, 10, 14 and 18MHz). The block diagram is then as shown in Fig 11 (b). Output from V2 (6K7) is at high impedance and is limited to about 100mW, so I use a compact external pa running about 10W. There is space inside the receiver for an internal driver and pa. To operate as a transceiver requires at least three relays to switch the signal path.

"It should be noted that adjustment of the bfo when receiving will shift the transmit frequency, so it is necessary to remember to return the knob to its original position when transmitting. One way round this is to cut out the bfo on transmit (another relay) and to turn V5 into a Miller oscillator on transmit (yet another relay). It would in theory be possible to use the existing audio output valve as the transmitter pa, but this is likely to increase the proliferation of relays to alarming proportions and I feel that a separate pa stage is simpler (unless possibly you have a separate receiver so that the BC348 or other surplus receiver can be hard-wired as a transmitter — G3VA).

"Harmonic rejection is excellent due to the use of the existing high Q tuned circuits into and out of V2. Birdies due to bfo harmonics are likewise rejected by the i.f. transformers in the bfo signal path. The existing rf gain control effectively regulates the rf output power.

"Many amateurs would love to get airborne with their own contraptions but are deterred by the cost and difficulty of finding the necessary components etc. This modification is essentially a cheap and cheerful way of doing this — and is great fun. The more cowardly types could easily do the transmitter modification only, and use existing black boxes for receiving."

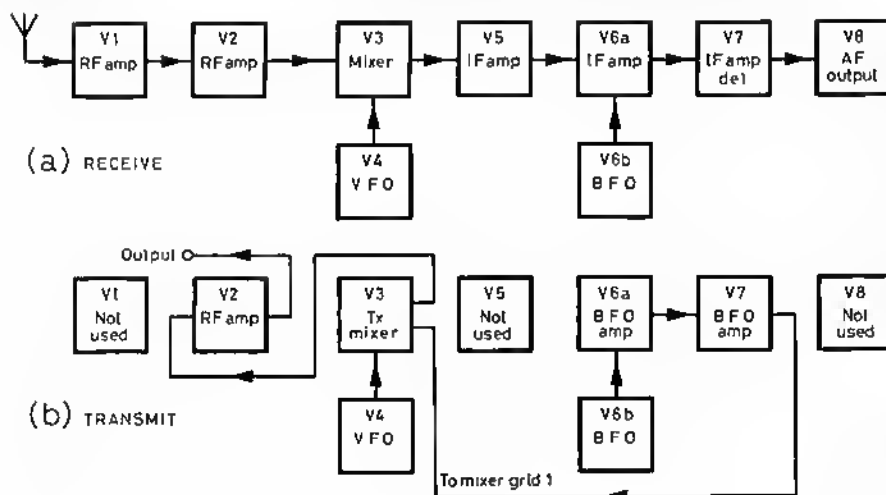

I feel it should be added that before adapting an old communication receiver for transmission, it would be advisable to check carefully the stability of the local oscillator on the higher frequency bands, if you wish to use these, particularly in respect of the mechanical vibration likely to arise from the use of a straight morse key on the same table. Local oscillators did not have the large swamping capacitance across the tuned circuit, as found in old transmitter vfos. A good test is to tune the receiver to a 14MHz cw or ssb signal and then try the "thumping test". The US BC-series receivers, many intended for airborne operation, will probably pass, but many less-rugged receivers are likely to fail on the higher frequency bands.

Fig 11. G0DLN's method of converting a BC348R receiver into a QRP transmitter in a matter of minutes. By incorporating switching relays, it can be used as a six-band transceiver provided that the local oscillator stability is sufficient

The W2DU ferrite-bead choke balun (*QST* March 1983) referred to above was described in *TT* February 1984, pp134-5, and does appear to differ from the zero-extent groundplane in one important respect. The *TT* item noted that the choke balun "is obtained by placing numbers of ferrite beads or sleeves around the final length of coaxial feedline. By using the added lengths of small diameter cable of the same impedance as the main feeder, numbers of ferrite beads having an inner diameter of 0.197in and length of 0.190in can be threaded on to the extra cable to produce 'a superb, compact, wide-band balun'. Note that such a balun does not transform the impedance and so may not be directly substituted for a 4:1 ratio balun."

W2DU described a 1.8 to 30MHz choke balun, only 12in long including connector, using 50 No 73 ferrite beads (Amidon FB-73-2401 or Fair-Rite 2673002401-0, μ 2,500 to 4,000) over 50 Ω Teflon-dielectric RG303/U cable (or RG-141/U with the fabric covering removed). For 30 to 250MHz, use 25 No 43 heads (Amidon FB-43-2401, Fair-Rite No 2643002401, μ 950 to 3,000).

The ferrite beads used by W2DU form primarily an rf choke, blocking the flow of rf currents down the outer braid of the feeder, as an alternative to coiling into a few turns the final length of the coaxial feeder (for 14 to 30MHz several turns of cable of about 8in diameter should suffice). On the other hand, the Weiner groundplane requires the use of lossy ferrite, as used in tv filters, to absorb the power on the outer of the cable braid. To quote the book: "For sufficiently lossy ferrite toroids along the outside of the coaxial line, the current on the exterior of the coaxial line's outer conductor may be neglected."

What is by no means clear, at least to me, is whether this technique means that the feedpoint impedance of the monopole is raised to the extent of permitting direct matching of a 50 Ω feedline. There is obviously work to be done in evaluating this form of antenna, which could be likened to the once-popular "sleeve dipole" without the sleeve but with a considerable amount of power wasted in those lossy toroids.

Yet more on quiet tune-up/protection

Since writing the item on "More on the tune-up protection device" (*TT* February), an illuminating letter on the origins of this device has come in from Lad Kucera, N9AEG. He writes:

"The circuit published in the October *TT* appeared strikingly familiar. A bit of research turned up an article "Tune up swiftly, silently and safely" by William Visser, K4KI (*QST* December 1979) of which the author assigned rights to SST Electronics. While the advertisements for SST Electronics faded away some years ago, I believe they commercially produced this product before their disappearance.

"The unit which I built in 1980 from the *QST* article, has proven to be a

very useful test instrument. My station operates with resonant coaxial-fed antennas, consequently my use for the unit has been limited to the tuning aspect of antenna construction. Operators who are using non-resonant antennas, open-wire feeders and an atu, may find that having the unit in line continuously is the key to easy tune-up. There is some incentive to build the unit with a self-computing type of readout; however, thus far I have resisted the temptation to do so. Since the transmitter sees a constant load, the commonplace meter calibrate control is far less sensitive in response to impedance changes in the antenna load circuit.

"Those readers who are interested in constructing such a unit may like to know that it is not necessary to go through the procurement process for each component individually. The easiest method of construction is to obtain an existing reflectometer, discard the old rf sensing unit, and substitute the relevant components of the new circuit. This conversion process is rewarding in that the existing reflectometer will include the cabinet, meter, calibrations on the meter face, two of the controls, and two of the rf connectors. My personal choice for conversion was a Heathkit model AM-2. This long-obsolete model has a fairly large cabinet and is obtainable in USA fleamarkets for about five dollars. I am confident that many other reflectometers would be equally adaptable to conversion."

K4KI's *QST* article of 1979 was sub-titled: "Looking for an easy way to adjust your antenna-matching network? This tune-up indicator takes the guesswork out while it protects your equipment" and begins: "A bit of experimentation on my part led to the development of a simple swr bridge that has several real advantages when used with an antenna system requiring a matching network. It allows the transmitter to be operated directly into a dummy load while the antenna system is adjusted. It also keeps the radiated signal (during tune-up) at an extremely low level. Finally, it will shorten the time needed to get a rig on the air." The principle is undoubtedly the same as that advocated by Fred Piesse, VK3BYW: see Fig 14.

Coaxial fed multiband "Windom" long-wire antenna

Gian Moda, I7SWX, sends along details of a simple multiband antenna that works on all bands from 3.5 to 28MHz, including WARC bands other than 10-11MHz: Fig 15. It is in effect an adaptation of the twin-wire form of the 300 Ω Windom antenna but fed with 75 Ω coaxial cable by means of a 4:1 balun. He has used this antenna for nearly 10 years with powers up to 200W rf, and finds the swr at the transmitter is quite low, not more than 2:1 at the band edges. The 4:1 transformer is made of pvc wire (eg black and red wire used for connecting loudspeakers to hi-fi amplifiers) connected as shown. It does not saturate, I7SWX reports.

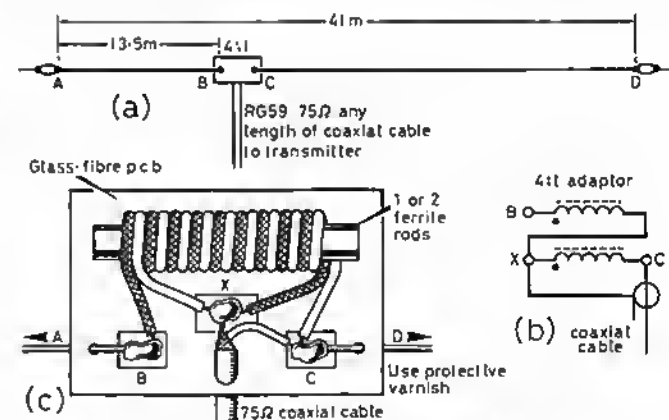


Fig 15. I7SWX's multiband antenna and 75/300 Ω balun transformer

Hints and tips

Shaun P O'Sullivan, G8VPG, adds some useful information in respect of a tip that appeared many years ago in *TT*. He writes: "For many years I have searched for a dentist's inspection mirror to view the hidden parts of a radio chassis. Genuine dentists' tools are, however, difficult to find and also quite expensive. However, an excellent dental inspection mirror designed for home-use is available from larger branches of 'Boots the Chemists', priced at only 89p. It is better for our purpose than a genuine professional tool since it has a plastic handle which will not cause any short-circuits. I have found this item to be an invaluable part of my tool box."

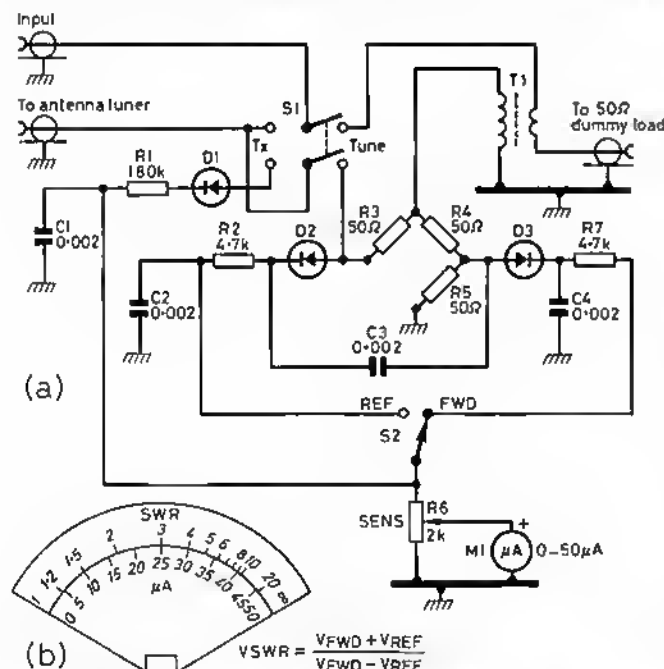


Fig 14. The original K4KI tune-up device (*QST* December 1979). T1 primary 21 No 20 Insulated wire, secondary 101 No 24 Insulated wire on Amidon T50-6 toroid core or equivalent. (b) Calibrated meter face, an advantage if direct swr readings are required

NEWS

BULLETIN

FRENCH GET 50 MHz — on permit basis with low ERP

Great news - another European administration has given 50 MHz access to many of its amateurs, with immediate effect. The French national society sent a letter to all its members recently, outlining the terms and conditions under which amateurs living more than 150 km away from a Band I TV transmitter can use the 50 MHz band, albeit with very low ERP for the moment.

Here's a translation of the REF letter;

"Dear OM,

"For some months discussions have taken place with the CNCL and the DTRE on the subject of 50 MHz permits.

"These discussions have led to a satisfactory initial result for radio amateurs. The positive attitude of the administration in this matter is welcomed. In effect, the act of authorising amateur transmissions in a band which will soon be used for TV (Channels 2, 3 and 4) broadcasting shows that the CNCL has understood the interest of French radio amateurs in this segment of the RF spectrum.

"It is evident that under these conditions permits cannot be granted to all OMs. Footnote 342 of the Radio Regulations (no interference to the primary TV service) applies. The power levels are very small, but they are sufficient for OMs to participate successfully in current experiments.

"We are convinced that OMs will understand the situation and abide by the restricted conditions.

"We hope that later on the protection distances can be reduced. The REF is working in this direction. To date we have the following conditions:

PERMITS:

These are precarious, personal and can be revoked, and are only for Class C, D and E licensees.

FREQUENCY BAND:

50-51 MHz

POWER LEVELS:

3W ERP at a distance of 150 km from a Channel 2 transmitter, extending to 10W ERP at a distance of 200 km. For Channels 3 and 4 the protection zone is the service zone of the TV transmitter.

MODES:

CW, SSB, RTTY and packet. Only fixed stations are permitted.

"You will find enclosed a nomogram (not reproduced here - it's like our own Erpogram - Ed) for calculating the effective radiated power. Please advise the REF that you have applied to the DTRE for a permit; their address is 246 rue de Bercy, 75584 Paris, CEDEX 12.

"The DX season starts in May. Radio-REF for March and April will give other useful information.

"Good luck & 73, de F8SH & F9LT"

We've reproduced (adjacent) the map sent by REF to its members. This shows the areas from which 50 MHz can't be used and the boundaries of the two power levels. The twin zones around the Amiens-St Just and Chartres transmitters knock out a fair amount of northern France, unfortunately, but it looks to us as though about two-thirds of the

(over) ▶



RADIOLYMPIA:

"Radiolympia 1939 will be very much more than 'just another Radio Exhibition'. It will reflect the prominent position which radio, after 17 years of existence, has won for itself in the life of the nation and the individual. The Exhibition this year..... emphasises the tremendous progress which radio has made and is making from year to year"

So said the Exhibitions Organiser of the 1939 "Radiolympia" exhibition, which took place even as the storm-clouds of the Second World War were gathering: the cover of the lavishly-produced publicity material gives the dates 23 August - 2 September, and a poignant section entitled "Radio in Defence" describing some of the exhibits to be seen at the show was to become all too relevant in the six years after "Radiolympia 1939". It is all the more surprising that, in leafing through its pages, there is no hint of the horror to come. And does this sound familiar?

"To-day not one of us could get away from it or do without it if he wanted to. It's in the home, on the sea, in the air, in cars and caravans and trains; in peace or in war, in entertainment, industry,

(over) ▶

At present the numbers involved in the hobby were declining, and the Society planned to reverse this trend. He reminded the audience that the DTI have offered an award for the outstanding Young Amateur of the Year, and he thanked them for their initiative. Sir Richard said that the Society was also indebted to the DTI this year for permission to use the special prefix GB75 in respect of the anniversary celebrations. Other plans under way included the production of videos to encourage more young people into amateur radio and a Junior category of Society membership with its own magazine.

Sir Richard then said that the Society's plans to celebrate its 75th anniversary included a three-day exhibition at the National Exhibition Centre, and the Society's Patron, His Royal Highness the Duke of Edinburgh, had been invited to be present. Following this, there would be three open days for visitors at the Society's Headquarters, when much of the Society's memorabilia would be on display. On the following Friday and Saturday a Data Symposium would be held at Harrow School. The following week would see an international seminar on satellites, followed by the AMSAT-UK Colloquium at the University of Surrey. A brochure of the complete programme of events was due to be published shortly, and the Society looked forward to hearing from clubs concerning any related events which they were planning.

Sir Richard said next that he would like to thank the Society's loyal and hard-working staff for their efforts on its behalf; he added that some of them were present and asked them to identify themselves. He then introduced the Society's Executive Vice President for 1988, Dr J N Gannaway, G3YGF. Finally, Sir Richard said that he would like to congratulate the two newly-elected members of Council and presented Messrs J Allen, G3DOT and G R Smith, G4AJJ, with their badges of office.

In conclusion, Sir Richard said that in working for amateur radio, "what you get out of it depends on how much you put into it". He urged those present to encourage all amateurs to join the Society, thus making it stronger and allowing more benefits to all members.

CALLBOOK

Winter 1987/88 Edition

£6.49 (members by post)



MORSE TESTS

The following list shows the dates and locations of all the available test centres from early April to mid-May as we went to press. Because of space limitations, we cannot print a complete list of all the test centres notified to us, but these can be found on the application form itself.

Morse tests will be carried out in groups of three and will be of half an hour's duration. Details of the test, the venue and how to get there will be sent to you as soon as your application has been processed and your place confirmed.

COUNTY	TOWN OR LOCATION	DATE
Somerset	Burnham-on-Sea	03/04/88
Gwent	Newport	04/04/88
Guernsey	Guernsey ARS, St. Martins	07/04/88
Cambridgeshire	Cambridge	08/04/88
Hampshire	Winchester	09/04/88
Wiltshire	Swindon	09/04/88
Dumfries & Galloway	Stranraer	09/04/88
Staffordshire	Stafford	10/04/88
Fife	Leslie	12/04/88
Derbyshire	Clay Cross	13/04/88
Suffolk	Ipswich	14/04/88
East Sussex	Hailsham	16/04/88
Cheshire	Macclesfield	16/04/88
Cornwall	Liskeard	16/04/88
Humberside	Goole	17/04/88
Strathclyde	Glasgow	17/04/88
Lincolnshire	Lincoln	20/04/88
Greater London	Wood Green, London N22	20/04/88
Northamptonshire	Tiffield, Northampton	21/04/88
Nottinghamshire	Mapperton, Nottingham	23/04/88
Greater London	Dartford	23/04/88
Hereford & Worcester	Malvern	23/04/88
Essex	Colchester	23/04/88
Greater London	Croydon	25/04/88
Greater Manchester	Clifton	25/04/88
Essex	Chingford	25/04/88
Co. Durham	Great Lumley	27/04/88
Avon	Redland, Bristol	27/04/88
Leicestershire	Wigston Magna, Leicester	29/04/88
Surrey	RSGB VHF Convention, Sandown Park	01/05/88
South Glamorgan	Penarth	03/05/88
Grampian	Aberdeen	04/05/88
Dyfed	Carmarthen	05/05/88
Greater London	Eltham, London SE9	06/05/88
Lothian	Edinburgh	07/05/88
Mid Glamorgan	Rhydyfelin, Pontypridd	08/05/88
Central	Stirling	10/05/88
South Yorkshire	Sheffield	12/05/88
Norfolk	Norwich	14/05/88
Surrey	Guildford	14/05/88
Tayside	Kirriemuir, Angus	14/05/88
Isle of Wight	Binstead, Ryde	14/05/88
Lincolnshire	Grantham	14/05/88
West Sussex	Horsham	15/05/88
Strathclyde	Glasgow	16/05/88
Merseyside	Liverpool 15	17/05/88
Berkshire	Reading	18/05/88
Bedfordshire	Luton	19/05/88
Jersey	St. Clement	19/05/88

We receive notification of new centres almost daily and the application form gives a full list of those currently taking advance bookings for Morse tests.

Talking Point

ITU conferences and you

WARC-MOB:

No, not a World Administrative Radio Conference run by an unruly crowd but one dealing with the mobile service. Richard Baldwin, W1RU, was present on behalf of IARU at the last one - which took place in Geneva last year - and he's done a report on it which we're delighted to be able to publish in the Bulletin. Here it is:

"Every decade or so the International Telecommunication Union (ITU) holds a full-scale telecommunications conference, one which looks at every aspect of the International Radio Regulations. This is called a General WARC (General World Administrative Radio Conference), and whilst there are many aspects of such a conference which can have an effect on the amateur and amateur satellite services, we are always particularly concerned about the Table of Frequency Allocations.

"The last General WARC was held in 1979. Since then there has been a number of specialised WARCs, each dealing with some specific radio service or problem area. For instance, in the past couple of years there have been high-frequency broadcasting WARCS and mobile WARCS and geostationary satellite WARCS. Each of these has a specific and detailed agenda, which is agreed prior to the conference, and the work of the conference is not supposed to go beyond the bounds of that agenda. In other words, an HF BC WARC is supposed to deal only with the problems of the HF broadcasting service, within the frequency allocations for that service which were established at the General WARC of 1979.

"But life gets more complicated, and after a while there comes a time when the administrations begin to believe that they can no longer solve the problems of a particular service within the confines of the frequency bands already allocated. Pressure for another General WARC then arises, together with some re-allocation of the spectrum. And re-allocation means that if one service gains frequencies, another service has to lose them.

"There were two specialised WARCs during 1987, and out of both of them came recommendations that there be some sort of General WARC not later than 1992. The high-frequency broadcasting organisations believe that their present-day channel requirements cannot be met within the bands currently allocated to the HF broadcasting service. As a result of the mobile WARC held during September and October 1987, there were several recommendations to the effect that certain problems which were beyond the scope of the agenda of the conference should be referred to a "competent" WARC (which means some form of General WARC) to be held no later than 1992. And so the writing on the wall becomes more and more clear.

"The mobile WARC also ran into a number of problems in finding space for new uses within those frequency bands allocated to the various mobile services (i.e. aeronautical, land and maritime, including space). The agenda of the conference did not permit solutions to be found outside the currently allocated frequency bands if such solutions would have a significant effect on another service. Even with this restriction, however, some actions taken by the mobile WARC could have an adverse effect on the amateur and amateur satellite services. For example, Mexico introduced a footnote to the table of allocations which would have permitted that country to establish a land

mobile service as the primary service in the 430-440 MHz band. The first concern of the IARU observer team at the conference (W1RU, SP5FM, I1RYS, YT7MM) was that such an allocation could have an adverse effect on the amateur satellite service segment at 435-438 MHz. We persuaded Mexico to change their proposal to exclude that segment. Our second concern was that other countries, particularly in the Americas, would join in that footnote and thereby create something of a stampede. We were prepared to cope with that possibility but fortunately no other country joined Mexico in its proposal.

"A number of European countries added their names to a footnote which would have made land mobile a primary allocation in the 1700-2450 MHz band. That, of course, affects an amateur band. Similarly, Cuba introduced the radionavigation service as primary user in the 1215-1300 MHz band.

"None of these actions is by itself catastrophic, but there is a clear indication that we may be in for a rough time at the next General WARC, perhaps as early as 1992, and this may be the case especially in the vicinity of the HF broadcast bands and as far as microwave allocations are concerned. (We referred to this topic on page 234 of the April 1987 RadCom, in an editorial "Early warning - frequencies on the line" - you saw it first in RadCom - Ed)

"Fortunately IARU saw the warning signs and began preparations a couple of years ago. As in the period prior to the 1979 WARC, much of the responsibility will lie with the individual member societies of IARU. It is they who must thoroughly and adequately put forward the needs and advantages of the amateur and amateur satellite services to their respective administrations".

Nice piece, that, and we couldn't have put it better ourselves. RSGB is well aware of the work that needs to be done in this area, and no doubt we'll have a lot more to say about this subject in subsequent issues of the Bulletin. Remember the simple equation, ladies and gents; no bands = no amateur radio. ■

This Month :

*Dick Baldwin, W1RU
takes a look at
the implications
of the next
WARC*

HOW'S YOUR CYCLE?:

In the New Year's edition of the GB2RS News Broadcast, we ran an item by Charlie Newton, G2FKZ - compiler of the weekly solar factual data - which dealt with the sort of problems facing solar forecasters. We felt it was such a good piece that we'd run it 'in print' just in case some of you were still suffering from post-Hogmanay blues and missed the gist of what it was all about. So here it is;

The effect of violent solar activity on satellites can be catastrophic; it can damage the solar panels and ruin experiments that have cost several millions of pounds. With this in mind, there is considerable interest in the forecasting of solar cycle 22. There has never been a shortage of forecasters, but now that computers are readily available and everyone has their own pet system, the forecasters are proliferating like rabbits. So what can we make of it all?

First of all, let's look at the factual data. If we take September 1986 as the minimum and start of solar cycle 22, the first thing we notice is that cycle 21 - June 1976 to September 1986 - lasted just over 10 years instead of the usual 11 years. If we compare the smoothed data - which experience has shown to be the best method - cycle 22's sun spot minimum of 12.3 was comparable with that of cycle 21. However, the rate of rise in the sun spot count for cycle 22 is greater than that of the previous cycle. If we then look at the 2,800 MHz solar flux levels we see that the actual minimums were almost identical but, since the minimum, there has been a trend which

suggests that this cycle is rising at a slightly steeper rate.

The really interesting curve is the Planetary 'Ap' index. This is an average A index taken from a larger number of observatories spread around the world. The magnetic minimum usually occurs about one year after the sun spot minimum. However, at the present time it looks likely that the magnetic minimum occurred in April or May 1987 - in other words about three months early. A comparison between the two cycles - 21 and 22 - clearly shows that this cycle was very much quieter, magnetically speaking, than the previous one. But if we look at the 'Aa' index - or the Inda index, as it is referred to in the GB2RS news broadcasts - the discrepancy is even larger. The plain facts are that in 1987 we saw the quietest magnetic period for a very long time and this coincided with the summer season. Looking at the secular, or very long term magnetic changes, the UK is at the lowest magnetic dip angle we are likely to see for the next 800 years; in other words, the present horizontal magnetic field is the strongest it will be in any of our lifetimes.

You may well ask what is the importance of this? Quite simply we've seen the most remarkable sporadic E season that anyone can remember. Through June and July, E layer propagation was observed every day at 28 MHz and almost every day at 50 MHz. The Africa and South America paths at 28 MHz were open much more frequently than at any previous time; the openings to the USA at 50 MHz occurred not only in June and July, as would be expected, but continued into November. To crown it all, we saw the remarkable 50 MHz opening to Botswana in late October. The

strangest thing of all is that no one seems interested in minimums and it appears that there were no official predictions. The remarkable coincidence of the magnetic field aspects which will not be repeated for 800 years were pointed out but went unheeded.

There are so many forecasts of the maximum that you can take your pick of any smoothed number between 107 and 185, and a time scale of 1990 to 1991. However, it might be a good idea to forget these and look for the sporadic E, which is much more reliable and exciting.

RAE RESULTS:

Well, you certainly enjoyed the RadCom Annual Extravaganza in the December edition of the Bulletin. By the closing date we'd received nearly 100 entries and a few rolled in even after that - we allowed those which had been postmarked the day before and posted first class, however. Here are the winners:-


1. Roger Blackwell, G4PMK (all answers correct)
2. T D Jones, G4IPR (one wrong answer)
3. We had to invoke the tie-breaker here because several people got two answers wrong - G3FPK, G4RSN, G3NAQ and G3XGK. Of these, the winner - who had the astronomical total of 314 words, put our miserable total to shame - was R D Burman, G4RSN, who therefore comes third.

We're also making a special award of a Call Book to Petr Doudera, OK1CZ, for the "best DX entry"! Petr got a few wrong answers but it was smashing to receive a non-G entry - there's no way in the world we could pass the R.A.E. written in Czech or Slovak, let alone unscramble weird anagrams. Well done, sir - see you next year?

Thanks to those who entered into the spirit of the thing (and in some cases supplied alternative answers....) and the nice comments.

Here are the answers:-

- 1(c), 2(b), 3(b), 4(a), 5(d), 6(a), 7(c), 8(c), 9(d), 10(c), 11(b), 12(a), 13(b), 14(c), 15(d), 16(b), 17(d), 18(c), 19(b), 20(a), 21(b), 22(c), 23(b), 24(a), 25(d), 26(b), 27(c), 28(a), 29(a), 30(d), 31(d), 32(b), 33(c), 34(d), 35(c), 36(b), 37(c), 38(a), 39(d), 40(a), 41(c), 42(b), 43(c), 44(a), 45(d), 46(c), 47(c), 48(d), 49(a) - honest.

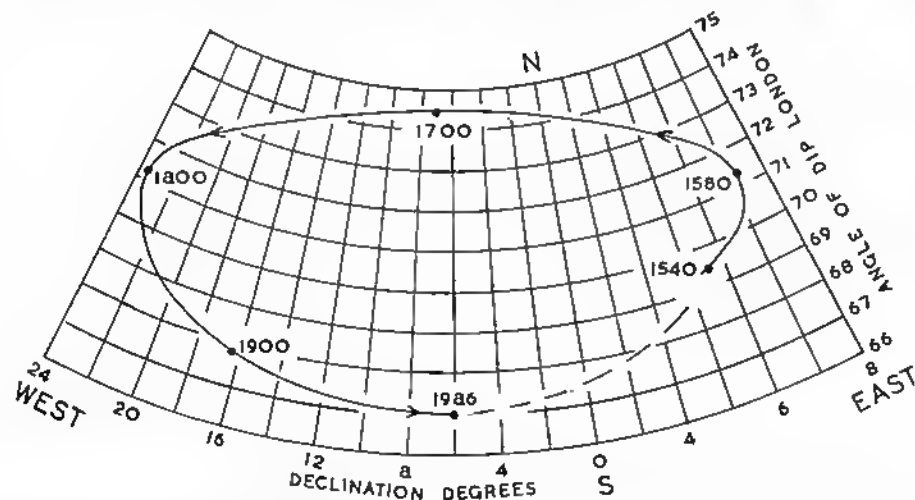

The secular field variations at London since 1540. This is drawn to show the 'auroral relationship' as we now have the lowest dip-angle since radio was invented and the 'H' field is at its strongest.

We were going to start a series entitled "Connector of the Month" this month, with a view to looking at the various types of RF connectors which we come across in the amateur world and how to choose them, put them on cables and generally get the best out of them. Yes, there are several ways of putting PL259s on to UR67 and no, none of them are especially brilliant. However, a visit to a local amateur's shack a few weeks ago gave some pause for thought regarding another sort of connector - the one you use to get the mains into your mains-powered equipment.

Said local amateur, who is relatively new to the hobby, had a home-brew HF linear amplifier - the usual type of thing, a pair of 813s doing an easy 400W between 3.5 and 28 MHz. Very nicely made it was too, except that the lead taking the wiggly amps from the 13A mains plug to the amplifier's power supply was terminated on a male octal plug which fitted a chassis-mounting octal socket on the rear drop of the chassis! In case you've never seen an octal plug, it looks like the base of those wonderful old glass and metal-envelope valves dating from somewhere about the year dot and including wonderful bottles like KT66s and KT88s - as used in high-class audio amplifiers before transistors came along. Trouble is, all the pins - which are about half an inch long - are nicely exposed ready for plugging into a socket. So our pal had 240V worth of phase, together with neutral and earth, appearing on pins which could either have shorted out to any nearby metalwork or - much, much worse - given him one hell of a belt if he'd absent-mindedly picked up the plug when power was on. What made it worse was that a multiway cable took all sorts of voltages (including about 400V for the screen grids and a 240V switched feed for the blower) from the power supply to the amplifier. Fine, except that an octal chassis-mounting plug, again with all pins exposed, was used on the rear drop of the power supply and a female cable-mounting socket picked them up and took them to the amplifier! So a stray brush of the hand across the plug and - especially if your other hand was on the chassis at the time - you could be in big trouble. If you don't believe us, read any of the standard things on the effects of electric shock.

When we mentioned this to Matey, he looked surprised and said words to the effect that he'd never bothered to think about it and just used whatever he'd had in the junk box - after all, it was "...only the mains, wasn't it?" A few comments were made about safety in the shack and all that and he was invited to visit the editorial establishment at his earliest convenience and raid the "technical stores" (posh word for variety of old cardboard boxes, etc, containing large quantities of - er, well, junk). The same evening he was presented with some suitable connectors, and Editor decided that maybe a little dissertation on mains connectors and things instead of RF connectors ought to be on the menu this time....

You really MUST NOT take liberties with mains - and that isn't a polite authorial suggestion, it's cold fact. From the point of view of the home-brewer, this means that you've got to devote just as much thought to getting the mains from the wall socket into your pet project's power supply system as you have to the internal electronics. The trouble is, we all tend to sweat blood over the sexy electronics inside our nice home-brew boxes (actually I've spent hours lettering front panels to make home-built projects look like something Racal or Marconi built, except that they usually end up looking like the first prototype of something Bloggs Backstreet Electronics knocked up on a wet Monday morning) and then throw together the mains side of the thing as a sort of irritating afterthought - which is emphatically not the right way to go about it.

Let's consider what's necessary.

Assuming your piece of kit is mains-powered, you need to convey 240V AC from your standard domestic wall socket to its innards - and in the vast majority of residences these days, that'll mean a 13 amp plug going into a wall socket. Believe it or not, it's worth spending some time looking at the variety of 13A plugs available because - although in theory they all conform to a British Standard - some are much easier to wire than others, some have much more reliable cord grips than others, some have sensibly large screw terminals instead of little non-captive screws, some have nasty

riveted-on fuse clips and so on. We've always used either MK or Ever Ready and never had any trouble, but we've certainly had problems with El Cheapo ones from dubious sources. Actually, if your wonder device contains anything which might be sensitive to mains overvoltage transients it's worth thinking about buying a 13A plug containing varistors (a.k.a VDRs) which will clamp such nasties. The editorial radio station contains an Icom IC251E, which used to be prone to some sort of internal microprocessor crash causing it to lose its marbles and sit on the operating desk looking silly instead of receiving any signals - it had to be switched off and disconnected from the mains for about thirty seconds so that the micro could reset at the next switch-on. A 13A plug with VDRs on the business end of its main cable stopped that happening, and also incidentally stopped the domestic video having similar nervous collapses.

Having sorted that out, you need some mains cable. The main (sorry) thing here is the current rating of said cable and the fact that it really ought to be cable specifically made for the job. That's to say it ought to conform to British Standard 6500 and have a current rating appropriate to how much power you're going to abstract from the mains supply. The usual mains cable ratings are 3, 6, 13 and 15 amps, so choose on that basis - and we'd honestly recommend getting it either from a mail-order outfit like Electromail, STC, Maplin, etc or from a proper electrical shop. Whatever you do, don't be tempted to use any old cable that's hanging round the shack or to twist up three likely-looking lengths of gash wire and whack them into the plug.

Next job is to decide whether the mains lead is to be "captive" or not - by which we mean whether it's to be permanently fitted to the equipment or whether there's going to be a connector at the end of the cable which will mate with a similar connector on the equipment. If it's going to be captive, don't succumb to the temptation to drill a hole the diameter of the cable in the back of the equipment, run the cable through it and connect to switches, transformers, etc. whilst telling yourself you'll never pull the cable or step on it by accident or.... Sooner or later you will, and the odds are that the power

will be on when you do - result, a blown fuse at best and a loud bang and a yell at worst. You MUST make sure that a good sharp pull on the mains lead will have precisely no effect on the functioning of the equipment, and also that there are no sharp edges on the chassis or whatever which could cut through it as a result of flexing over a period of time. So first of all, the mains lead must pass through a suitable grommet which will ensure that the lead can't ever come into contact with chassis at the point where it enters - you can get these from all sorts of places and all you need to do is to drill a hole large enough for the grommet, ensure that you've removed any sharp edges and push it in. Then push the mains lead through the insulated hole. If the cable is tight in the grommet and doesn't want to go through, here's a tip - run a band vigorously through your hair a few times and wipe it on the cable and it'll go through easily. If you're like me and haven't got enough hair for this trick to work, try a drop (literally) of the KYL's washing-up liquid.

Having got the cable safely through the hole, the next job is to anchor it so that there's no strain on the connections which you'll be making later on. If all else fails, tie a knot in it - this is crude but a whole lot better than no strain relief at all. Two better solutions are either a screw-on plastic clamp made for the purpose, which will cost you about 4p from an electrical shop, or a suitably sized "P"-clip which you can push on to the cable and then bolt to the chassis. Either way, when you think you've got it sorted out give your handiwork a test by yanking hard on the cable and making sure that there's no "give" in it.

For non-captive cables we need to think about suitable connectors. You'll no doubt have guessed by now that the object of the exercise here is to make sure that at no time can your little pinkies - or any other part of your anatomy - come into contact with any live conductors. This is why male octal plugs, or any other kind of unprotected male plugs, are a total and utter no-no on the equipment end of a mains lead. Furthermore, you must make sure that your mains connection arrangements are "Murphy proof" - which means making absolutely certain that your mains cable can't possibly be plugged into the wrong socket by mistake even though you're frantically trying to get the hilltop contest station on the air three minutes before the event begins and there are wires, connectors and other

operators flying around all over the place. This means using plugs and sockets which are ONLY used for mains and NOTHING ELSE. You might think we're making a real meal of this, but we can assure you that we've seen any amount of home-built amateur equipment which used the same type of socket for four or five different functions including the mains input. Remember Murphy's Law - "if something is capable of being incorrectly assembled, somebody will one day incorrectly assemble it". Or, "if it can happen, it will".

We'd strongly recommend using one of two types of mains connector, both of which are easy to get hold of and which are commonly used in amateur and professional gear. The first is the "IEC" connector - this is a three-pin job specifically designed for mains-type applications and takes the form of a chassis-mounting socket and a wireable plug. Icom rigs use them, as do various household things, and you can also buy the socket with integral mains filters rated at 2 or 6A. Just to make life even easier, you can also buy lengths of mains cable with integral IEC plugs moulded on one end. Other accessories for them include rubber "boots" to go over the socket terminals and insulate them from sticky fingers and cable clamps to make sure that you don't inadvertently unplug the cable when you fall over it, etc, and take the contest station off the air. You can also buy chassis sockets with integral fuseholders, which may be handy. Suitable cutters to cut out the specially shaped hole for the socket are available for a few pounds, and it might be a good move for a club to purchase one for loan to members. All in all, the IEC connector is a good bet and it's rated at 6A - which ought to be enough for any amateur application.

The other good bet is the Cannon XM and EP series, rated to 5 and 10A respectively. These are extensively used in professional equipment which is expected to lead a fairly hard life and come in male and female plug and socket versions for taking mains in and out of things - so you do need to be careful to choose the right ones. "Cannons" are very easy to wire and once they're on they never seem to go wrong - they feature positive mechanical latching, so when they're plugged in they won't unplug until you press the little latch on the connector. They're a touch more expensive than the IEC connectors but you sometimes see them at rallies and so on for very low prices, usually on the end of a length of cable.

So there it is - IEC or Cannon connectors are what we go for every time when it comes to home-brew, basically because they're fit-and-forget and there's no chance of anything nasty happening. Both are a damn sight safer than octals, DIN plugs, D-types, 10-pin video multiways and all the other weird and wonderful mains connectors we've seen on amateur equipment. By the way, if you need to take mains and other high voltages out of one piece of equipment to another (i.e. from a power supply and control unit to a linear amplifier) do use a decent multiway connector such as a Cannon KPT which is rated for the voltages you have in mind and which have good insulation and mechanical locking. Just because it says "amateur" on your licence, you really musn't take an amateur approach to high voltage in any shape or form.

Next month we'll try and get back to RF connectors - or the gentle art of persuading an N-type on to a length of UR67 without becoming suicidal....

AMATEUR IN TREASURE HUNT.....

At 8.30pm on Thursday 7 April, you'll be able to see well-known auroral operator Jim Williamson, G4OJFET, and his girlfriend Ann on Channel 4's programme "Treasure Hunt" - the one starring Anneka Rice and a couple of helicopters. The programme has already been recorded and Jim tells us that, although he couldn't sneak a mention of amateur radio into the show, sharp-eyed viewers will note that he's wearing his RSGB tie! Jim sent along an interesting extract from the "Treasure Hunt" book, which outlines how they do all the communications for the programme - we're a shade short of space in this month's Bulletin but we'll try and outline some of the tastier hits in a subsequent one. We like the idea of a helicopter-borne repeater..... Well done Jim and Ann, and we'll be glued to our screen seeing how you did.

AGM MINUTES:

We had hoped to get the minutes of the last Annual Meeting of the Society into this edition of the Bulletin. Unfortunately we were a shade optimistic in our timing and hadn't quite finished the write-up by press time even though we put in a load of late nights and thrashed the word processor to within an inch of its life. They'll definitely be in next month, though.

Helplines

SPECIAL OPERATORS REQUIRED:

During this year's 75th Anniversary Convention at the NEC in Birmingham there will be a special event station - GB75AC, which stands for 75 Anniversary Convention - running from 9-17 July. The station will be run by members of the Solihull ARS and will be active on all bands using all possible modes. However, because the station will be run on a 24hr basis, additional operators are required. If you wish to join the operating team you should be a current member of the RSGB, hold a current class A or B licence and should be willing to fit in with an operating rota, logging and some computer data entry. This will be a very prestigious station and will attract media coverage so other criteria will need to be met by applicants. Further details can be obtained from Mr Warwick Hall, G4WMH, 45 Dorchester Road, Solihull, West Midlands B91 1LN tel: 021-705 0488 (social hours please!).

HAM AID:

You've heard of Band Aid, Live Aid and Comic Relief - well now look out for "Ham Aid"! Members of the Devizes & DARC will be running a marathon 48-hour special event station over the weekend 28/29 May. They will be applying for special event calls with the suffix 'HAM' and hope to be operational on all bands, using as many modes as possible, to raise money for third world relief by sponsorship on the number of contacts made during the period. How can you help? First of all, you can listen out for the stations and work them if possible. Secondly, the group is looking for all kinds of sponsorship help to make the event a success. They need equipment and antennas as well as sponsorship for the QSL cards etc. If you can help in any way, please contact Noel Woolrych, G4TIX, QTHR, telephone 0380-4533, Prestel mailbox 103804533 or Telecom Gold mailbox MAG10342.

PLINK, PLINK, FIZZ.....

In the course of a 144 MHz QSO the other day someone mentioned a rather interesting point about charging batteries which hadn't crossed our mind before. Seems that he'd bought a piece of equipment which featured a rechargeable battery of the increasingly common sealed lead-acid type - that's to

say not a NiCad pack but a miniature sealed version of a car-type battery. These are charged from a constant voltage of typically 2.35V per cell, so for a 12V battery you need a shade over 14V. The odd thing was that when on charge with the pukka charger supplied with the gear in question, the battery emitted quite a distinct "fizzing" noise. This worried our man since he wasn't sure whether a) there were copious amounts of hydrogen being emitted - one spark in the shack and Goodnight Vienna or b) the battery was on the point of exploding. The manufacturer seemed to think this phenomenon was probably normal but a few other people thought it was anything but!

These batteries are becoming quite common in things like broadcast ENG gear, portable cellular telephones and so on and no doubt they'll start appearing at rallies and whatnot in the not too distant future. We'd like to know whether they're at all dangerous if incorrectly used or whether they're prone to blowing up and demolishing the shack. Any battery specialists out there who can advise us? A line to the Bulletin's editor QTHR or via HQ would be much appreciated.

QL PACKET?:

GM4JKL is looking for information on software for his Sinclair QL computer to run packet, AMTOR, RTTY or CW transceive. Can you help? If so please ring him on 0236 23153 or write QTHR.

YAESU MANUALS NEEDED:

The Pembrokeshire RS has recently purchased its first HF station for use with the club's callsign GW0EJE. The equipment comprises two separate units; the Yaesu FR100B receiver and FL200B transmitter. Although the transmitter came with every valve missing, the club has managed to get it up and running - after a fashion. In order that the members can restore these two fine pieces of equipment to their former condition, they urgently need literature, workshop manuals or operating manuals. If you have any information please contact:-

Brian Smith, GW0IER
2 Redlands Cottage
Liddeston
Milford Haven
Dyfed SA73 3PY
tel: 06462 2825

WANT A USA CALL?

US FCC examinations were conducted during last year's National Convention at the NEC and the HF Convention in Oxford. The examinations proved to be very popular and, as a result, a further opportunity to take the FCC exam will be made available in the next few months in central London. Anyone interested should get in touch with:-

Don Field, G3XTT
105 Sbiplake Bottom
Peppard Common
Henley-on-Thames
Oxon. RG9 5HJ

NO GOOD IN UK:

Gerald, G0GXM, has just received a letter from a Swedish amateur regarding an offer of logbooks. Gerald asked us to warn other members about this offer, since the logbooks are of a loose-leaf variety and as such are NOT legal for use in the UK (clause 6 of the licence). Although these logbooks are quite inexpensive, please don't be tempted to use them - there are many logbooks available in the UK from various sources (including RSGB, subtle hint) which comply with the regulations.

COLLINS VETERAN CLUB?:

Sten Tegfors, SM4CTI writes to ask whether the rumours concerning the existence of a "Collins Veterans Club" here in the UK, which assists Collins owners in exchanging spare parts and information on mods etc, have any foundation. If there is such a club, Sten would very much like to join as he is an ardent Collins fan. Sten can be contacted at:-

Vikhyttan 2487
S-776 00 Hedemora
Sweden

HIGH FLYING FUND-RAISER:

The Humberside Scouts are in the middle of a major fund-raising exercise and Roy Andreang, G4CMT has come up with a novel idea for sponsorship. Roy has been involved with the Scout movement for many years and on the Saturday nearest his 64th birthday, which is on 6 April, he intends to make a 10,000 feet tandem parachute jump with one of his scouts, Steve Hodgson, who
(cont p.203 col.1) ▶

Trade Talk

What happened to muTek?

We're often asked this question and we've heard many people speculating on the air about why they're not advertising any more. We thought that the demise of this excellent British company was very sad, and it seemed to us to be a good move to get the facts from the horse's mouth, as it were - so we asked Chris Bartram, G4DGU, to drop us a line and reveal all. He did, and here's what he has to say;

"When I set out to manufacture amateur radio equipment during 1979, I wanted to make things that I'd be proud to be associated with. I'd felt that few items of equipment available commercially were capable of the sort of performance that radio amateurs need, particularly at VHF. I also felt that the manufacture of amateur radio equipment of the kind I had in mind was an engineering challenge at least equal to that presented by the avionics test equipment with which I'd been previously associated.

"muTek grew steadily for its first five years. We never aimed at spectacular financial growth; indeed, despite suspicion's I've heard voiced to the contrary, the margins involved in the manufacture and retailing of amateur radio equipment are small and wouldn't allow spectacular growth. Despite this we were happy to live modestly and invest heavily in the development of new products.

"I believe we made several significant advances in the state of the art. I'm particularly proud of our development of the use of non-dissipative negative feedback techniques in GaAsFET low-noise VHF amplifiers. To the best of my knowledge, muTek was the first company in the world - either in the amateur radio or professional communications field - to develop this technology. Others, including multinationals, have tried and failed. The GBFA144e 144 MHz masthead preamplifier, which we developed in late 1982, combined noise figure and strong signal handling characteristics of an order which it would still be difficult to beat five years later.

"In mid-1985 Jane - my wife and the company's administrative director - was diagnosed as

having multiple sclerosis. This led to a restructuring. We were still growing nicely and had introduced our first transverters; the TVVF230c 144 MHz to all HF bands (another first) and the TVVF50c and TVVF50a 50 MHz transverters. We'd also looked at our export distribution network and appointed a full-time distributor in the USA, but I wasn't able to spend the proportion of time I'd previously enjoyed designing the products. Despite this we got the TVVF144a high performance 28-144 MHz transverter into production and I did most of the groundwork on a very high performance transverter for the band I love most of all - 430 MHz.

"At the end of 1985 we had two serious bad debts. The first was owed by a very well known "independent" UK amateur radio retailing firm who claimed (falsely) that we had sold them faulty goods, and we were within 24 hours of obtaining a county court judgment before they settled. The second was with our US distributor - the VHF Shop, owned by Tom Waldron, KQ3R. This latter debt has never been settled, despite attempts to pursue the matter through the legal systems of both England and Pennsylvania. The sum of money involved wasn't enormous, and we had the financial depth to continue, but it caused problems with cash flow and this - combined with our changed home circumstances and my wish not to lose touch with engineering - led Jane and I to the decision that we were not prepared to continue.

"We wound production up slowly, both because I wanted an ordered end to the company's affairs and also to allow potential purchasers of the company's design portfolio the opportunity to continue to produce the product range. However, there was surprisingly little interest from the established trade. In retrospect, the reason for this seems to be a lack of real understanding of the technology; most established companies simply can't see large enough margins on their amateur radio business to justify employing staff with sufficient experience

and knowledge to tackle the complexities of manufacture. Manufacturing amateur equipment - or indeed another form of radio equipment - isn't a job for amateurs.

"Since late 1986 muTek has been wound down gracefully, and we have taken steps to support our customers. muTek's former production manager, Nigel Lay, G8FXG, is now operating Beronheath Limited and is well equipped to service and repair all muTek's former product range to the highest standards, as well as making very high performance RF distribution amplifiers for professional applications. They're on 0409 24 548.

"In retrospect, I suppose that I enjoyed my seven years' involvement with the "trade", and I'm grateful to all those who made it possible by buying various pieces of muTekery. What I don't regret is the passing of those twenty or so Sundays each year when I'd be woken by the alarm clock at 0300 and would then drive for several hours to spend the day in a wet, muddy field or a dusty and smelly hall trying not to snarl at potential customers making inane comments - or, even worse, biting my lip at the comments made by those extremely clever people who were absolutely certain that they could do much better for far less and that either the whole thing was a big rip-off or that our equipment couldn't possibly work as well as we claimed.

"I'd like to think that someone, some day, will again start to manufacture high performance amateur radio equipment in the UK. I very much doubt whether it will ever happen, though".

Incidentally, now that the poor old Bulletin Editor can't buy one direct from muTek (sob, sob, wipe tear stains off shirt with dirty hanky), anybody got a muTek TVVF144a 28-144 MHz transverter surplus to requirements and looking for a good home? He's after one in order to improve the editorial radio station somewhat but everyone keeps beating him to it when one appears in the small ads! Please put him out of his misery - contact GW4FRX QTHR or via RSGB HQ.

Council Brief

26 November 1987 & 30 January 1988

26 NOVEMBER 1987:

At this meeting Council began by discussing the current management accounts. The Finance & Staff Committee chairman reported that the finances of the Society were in a surplus position; the total income was satisfactory although slightly down on budget. The area causing most concern was the sale of books, which were below the budgeted figure. Book pricing policy was raised and discussed in depth, and the Secretary said that he was concerned about the ill-will which appeared to have been generated in regard to the costs of some imported publications and was currently looking into how prices were derived. Future policy relating to book production was discussed, as were the likely advantages and disadvantages of in-house typesetting.

Council was informed by the Secretary that main components of the Society's IBM 38 computer had now been paid for; this contributed a saving of some £12,000 per annum.

Expenditure for NDC and the recent mailing shot were also discussed; just under 1,000 new members had been recruited as a result of the latter and the exercise had been very beneficial.

The Secretary then gave his report.

He referred to three papers which had been circulated to Council, on encouraging beginners into amateur radio, the Young Amateur of the Year Award and the student licence. It had been decided to make a video aimed at young people, with two presentations on the same tape; this was intended to be ready for the NEC in July. With regard to the student licence, the Society aimed to be in a position to begin discussions with the DTI by the middle of 1988. The Secretary also outlined his proposals for the Society to improve its mechanism for influencing the Government and described the outcome of some recent meetings. Council voted in favour of the Society taking a higher political profile where necessary.

Council discussed recommendations from the Finance and Staff Committee with respect to the formation of a Publications Management Group. The proposals

were approved in principle, with the Secretary chairing the group initially until it had become established.

The Secretary closed his report by saying that the draft of the full Society response to the CSPI Report had been circulated to LAC and was awaiting discussion.

Recommendations and discussions arising from Council minutes were then dealt with; these related to:-

- a) book production
- b) the Rouse Trophy
- c) the EMC IARU Representative
- d) Council of Europe Radio Amateurs Club
- e) the RLO scheme
- f) the European Directive for Electromagnetic Compatibility
- g) 75th anniversary celebrations
- h) future UK country prefixes
- i) the role of the President

Outstanding business for the year was discussed and priorities for the coming year were set; these were books and youth into electronics via amateur radio.

In addition, Council discussed recent correspondence.

Mr Brinkworth had received a letter stating that the Society had not responded to the CSPI report. The Secretary replied that the Society had in fact made an initial response to the DTI and was now producing a full formal reply.

The President had received a letter from G6LX reporting on his recent visit to Hanover. Great interest was being shown in the Society's forthcoming 75th anniversary.

30 JANUARY 1988:

The Society's 1988 President, Sir Richard Davies, G2XM, took the chair for the first Council meeting of 1988, which was held in Ipswich, Suffolk. The Town Hall/Corn Exchange in Ipswich was to be the venue of the Presidential Installation to be held later in the day.

Early business on the agenda was the appointment of various officers and the appointment of a Council representative for Scotland (Zone G). It was noted that a casual vacancy existed with respect to Scotland, since no member had been proposed to fill the vacancy on the 1988 Council. Such a casual

vacancy could now be filled by Council under Article 26. Following some discussion, Frank Hall, GM8BZX, was unanimously appointed as Council member for Scotland until the end of 1988.

The appointment of the Society's Executive Vice President is a matter for the first Council meeting of each year. Again, following some discussion Dr Julian Gannaway, G3YGF, was appointed Executive Vice President for 1988.

The appointment of a new Honorary Treasurer for the Society, following the recent resignation of David Cornish, G3COR, for health reasons, was discussed in some detail. It was noted that since the upgrading of the Society's accounting staff in recent years, the role of the Honorary Treasurer had changed to some extent. After further discussion, Mr Basil O'Brien, G2AMV, was appointed the new Honorary Treasurer for the Society. In view of Mr O'Brien's appointment this now created a casual vacancy amongst the ordinary members of Council. It was agreed that this matter would be discussed at the next meeting of Council.

Under the heading of the Financial Report, the Secretary read out a short statement which he had agreed with the Chairman of the Society's Finance and Staff Committee. The statement related to an exercise which had recently been completed by the Society's Accountant in order to ascertain the profit/loss situation at the end of the first six months of the 1987/88 financial year. All the normal considerations had been taken into account in arriving at an estimate of the financial position at the end of December 1987. As a result, it appeared that the Society had made a small surplus of some few thousand pounds. It was felt that the new management accounting scheme had been beneficial in monitoring both income and expenditure. In the context of the financial situation, Mr G. Smith, G4AJJ, had submitted a proposal to Council with regard to the monitoring of the financial situation. The President explained to Mr Smith that some quite fundamental changes had taken place during 1987 as a part of the reorganisation of HQ and that it was now considered that monitoring was improved. As a result, Mr Smith withdrew his paper.

(cont p.203 col.3) ►

Around the Groups

Beginning with this issue, the 'Around The Groups' section of the Bulletin has been expanded to include more items of interesting news from clubs, groups and societies. We are looking for the kind of news which will be of interest to other amateurs and clubs - such as special awards, DXpeditions, user groups, special interest groups, etc. In addition, we'd like to know if your club has an interesting project on the go or is doing something to encourage youngsters into amateur radio. Basically, we'd like to hear about anything which might inspire fellow amateurs and clubs to do something similar. Have a look at the items below for examples of what we have in mind.

If you have any interesting items of news, with good black & white photographs if possible, please send them direct to HQ marked "Around the Groups - Bulletin". We may not be able to use all items sent in because of space limitations but we'll try and fit in as many as possible.

The deadline for the MAY issue is Wednesday 30 March but if you can send items in earlier it would be much appreciated.

ISWL '87:

The International Short Wave League has been growing in strength after its sad demise and re-emergence last year as ISWL '87. Many, if not all, of the founder members are still involved in the league; G2IZ, G2WQ and G2BRR being just three of the famous old callsigns who were determined not to see the death of a club with such a fine history.

ISWL '87 is able to offer its members a great deal; SWL contests, awards and so on. In addition, the league's monthly journal, "Monitor", is always packed with information on amateur and broadcast bands as well as interesting articles for the broadcast and amateur short wave listener. There is no shortage of licensed members either and they run regular SSB nets on 80m:-

Tuesdays 7pm - 3700 kHz
Saturdays 10am - 3685 kHz

The short wave listener is never forgotten on these nets - indeed each new member is issued with a unique identification number consisting of their country prefix followed by a series of numbers.

The league also offers a QSL bureau service.

Have a listen to the nets or join in if you are licensed, and if you'd like further details please contact:-

Mr J May, Hon Sec ISWL HQ
10 Clyde Crescent
Wharton
Winsford
Cheshire CW7 3LA

THE AVONCROFT AWARD:

The Bromsgrove & DARC, in conjunction with the Avoncroft Museum of Buildings in Worcestershire, announces the Avoncroft Award.

This award is open to all amateurs and SWLs and to obtain it you must obtain the following number of points:-

DX claimants - 10 points
European - 15 points
UK - 20 points
VHF all areas - 15 points

Five points can be gained for having worked/beard any of the Bromsgrove & DARC club stations or special event stations (G3VGG, G6VGG, G3VGG, GB2RUB, GB2WED etc.), three points for any of the Bromsgrove & DARC members, and one point for any station in Worcestershire.

There is no time limit, past or present - hence the old GB calls listed above - but contacts must all be from the same address and QSLs may be required. Contacts via repeaters are not valid for this award.

To claim the award, send a log extract plus £1.50, 7 IRCs or \$3.00 to the Award Manager, Mr John Harvey, G41VJ, who is QTHR in the latest callbook.

WAB NEWS:

1) What is WAB?

The Worked All Britain Award scheme was devised in April 1969 by the late John Morris, G3ABG. His aim was to promote a series of awards based on the geography of Great Britain and Northern Ireland using the National Grid Squares, counties and rateable districts. Since that time WAB has grown through the voluntary efforts of many individuals, and aims to live up to its motto "To Assist Others". It creates more on-the-air activity by British amateurs and, in doing so,

fosters many lasting friendships within the UK and with countries overseas.

Awards are available for working stations in the large 100km squares, small 10km squares, counties, rateable districts and bookholders. Because of the way in which the awards are structured, participants gain a good geographical knowledge of the UK and this has encouraged many people to travel to the more remote parts of the mainland and islands in order to activate rare squares. The progress of these expeditions is followed by the many keen WABers around the UK and overseas. At the same time, it is hoped that WAB activity of this kind will enhance the status of G stations by making them wanted by DX stations. Many European stations already join in the HF & VHF nets and there is a growing interest from DX countries such as Israel. The WAB group hopes that UK stations will take the trouble to work out their WAB square and be prepared to give the details to foreign and other UK stations if asked. Including the area on your QSL card, alongside your Maidenhead Locator, is also a good idea. Details of how to work out the WAB square are given on page 68 of the current RSGB Callbook (available from HQ, another subtle plug...)

Many keen WABers activate rare squares which have no resident amateurs in them. Mobile operation and expeditions are encouraged and WAB gives an award to those who carry out this kind of activity for the benefit of other WABers.

WAB also helps amateurs and SWLs who are less fortunate by making donations to organisations like RALBC and QTI - which provides a fortnightly tape magazine for the visually handicapped. The group has no allegiance to any social, political or religious organisation and is independent of any other amateur radio group whilst remaining an affiliated group and full supporter of the RSGB.

How can you find out more? By listening to some of the nets, eg. 3760 kHz and 144.3-144.44 MHz, or by sending a large stamped addressed envelope (or, in the case of overseas enquiries, a self addressed envelope and 1 IRC) to:-

Brian Morris, G4KSQ
22 Burdell Avenue
Sandhills Estate
Headington
Oxford OX3 8ED

The current cost of a WAB Book, which gives lifetime membership of the group, is £6.00 inc p&p in the UK. Many members have more than one book (eg. one for HF and one for VHF etc.) but each member has only one vote at the group's AGM, irrespective of the number of books held.

So there you have it. WAB can be lots of fun but, above all, it puts back the sharing into amateur radio because although you are collecting areas yourself, you can also activate those rare squares for others. You can collect squares by joining in the nets where there is usually a mobile station running through a number of squares, or you can collect them on your own - it's up to you. WAB runs a number of contest throughout the year and this can also be a means of logging some more elusive squares.

2) Rare square to be activated.

On Sunday 3 April (Easter Sunday), GB10VA will be active from WAB square OV00. This area has been activate before on HF but the problem with VHF is that it is a very small area of foreshore at the base of a 500' cliff near Ravenscar in North Yorkshire. The station will be on 144.375 MHz and, although G10VA made 6 valid contacts in October 1987, it is hoped that the station will be running more power (100W) and a 13-element antenna. Steve, G1SGB, will be QRV from a site near to the cliff-top running 250W to 2x13-element antennas and he will act as the control station. Also, members of the Scarborough club hope to be active from the same square on 14 MHz. If weather conditions permit, they hope to raise the height of the antennas using balloons.

3) This month's new firsts.

The first 50 MHz award goes to G6ZGO for working 100 bookholders and the first Platinum WABEWA award, for activating 750 areas on 80m CW, goes to G5LP/M. G1NUS has become the first station to achieve the 1988 Decade Award for working 100 areas during 1988 with numbers between 00 and 99. Finally, G6STI has received the first award for working 900 series 3 bookholders on 144 MHz SSB. Congratulations to all concerned.

4) WAB Contest Results.

The WAB 80m CW Contest took place last November and the winners in each section are as follows:-

Single op - G40GB, 11,550 pts
Multi op - G4MWS, 2,100 pts
Mobile op - G5LP/M, 5,775 pts



GB2LNM with Alan Devereux, GM8VJV on the mic and Danny, GM4LDU assisting. Taking a keen interest are children from the Balain Primary school.

MONSTER STATIONS AT LOCH NESS - 2: EUROPEAN YOUTH CLUBS' DAY:

In January's Bulletin and in GR2RS last December, we mentioned the special event station GB2LNM (Loch Ness Monster), being run by the Mid-Lanark ARS in conjunction with the Scottish Tourist Board. Paddy, GM3MTH, has sent us a report on the first activity period which took place on 13/14 December together with the photograph above. The station was set up in the Clansman Hotel, on the banks of Loch Ness at Drumnadrochit, Invernesshire, adjacent to the Loch Ness Exhibition Centre. The quest of honour was Mr Alan Devereux, CBE DL, GM8VJV, Chairman of the Scottish Tourist Board, who did his fair share of operating on 20m and 80m. Local children from Balain Primary School also attended and the event attracted some considerable media coverage - all to the benefit of amateur radio.

The second operating period took place between 15 December and 11 January from the QTH of GM4LDU and netted a total of 8,000 contacts in 150 countries. The certificate, mentioned in January's Bulletin, will be available in a month or so and will make all recipients members of the 'Radio Amateurs' Nessie Appreciation Society'.

The third operating period is planned for the summer, possibly in June, and will be for one week with the station located again at Loch Ness. More details as we have them.

Saturday 30 April is European Youth Clubs' Day, an event which is held annually and which provides an ideal opportunity to promote amateur radio to young people.

Last year, members of the West Manchester Radio Club set up an amateur radio station in close cooperation with Atherstone Youth Concern. The event was the first of its kind and was a great success with the station operational on HF and VHF using SSB, RTTY, FM, QRP, CW and FAX. Youth club members were kept busy by sending greetings messages, log-keeping, writing out the QSL cards and collating information on the many stations worked. They also made and displayed flags of all European countries and manned various display stands. This year, the two groups will get together again at the Youth Club, Devonshire Hall, Devonshire Road, Atherstone to run the special event station GB2EYC.

As we said at the start of this item, this is an ideal opportunity to show youngsters how amateur radio can help them make friends abroad and give them a flavour of the kind of challenges it can provide in both construction and operating - in much the same way as Jamboree on the Air does. If you'd like to run a special event station for your local youth club on European Youth Clubs' Day, that's fine but you haven't much time. Apply for your GB call now, since

you must have your completed form in to Headquarters 28 days before the event. If you'd like more details on European Youth Clubs' Day, write to:-

Les Jackson, G4HZJ QTHR
or
Graham Joyce
Youth Clubs UK
Keswick House
30 Peacock Lane
Leicester LE1 5NY
tel: 0533-29514.

INTERNATIONAL MARCONI DAY:

It's ten years since the Cornish Radio Amateur Club last organised an International Marconi Day, and during a recent meeting it was decided that the time was right to run another similar event. The 1978 event earned a place in the Guinness Book of Records when - seven days and several hot valves later - it became the longest running non-stop special event station.

Monty, G4ZKH and Norman, G4USB decided to set up a small committee to organise this year's event with the aim of making it a very special one. From the outset it was agreed to involve the South East Amateur Radio Group of Eire, with which the Cornish Club is twinned. The group was most enthusiastic about the project and plans have progressed quite rapidly. There are now six special stations around the world, all of which have a connection with Marconi, taking part in the event.

The Cornish club will be running a station at Poldhu Cove, near Mullion on the Lizard Peninsula, the site from which Marconi made his first trans-Atlantic transmission. The callsign of the station will be GB4IMD.

In Eire, the South East Amateur Radio Group will operate from a site at Crookhaven, close to where Marconi carried out his first Irish experiments. The callsign there will be EI2IMD.

Across the pond in the United States, the group received the full support of Whitey, K1VV (who also took part in the 1978 event) and together with some of his friends he will run a station at Cape Cod - the site from where the first contact between Europe and the USA was made. The callsign for that station will be K1VV/IMD.

Further north, the Society of Newfoundland Radio Amateurs will be operating from St. Johns and the station will be set up on Signal Hill, the exact spot where the first trans-Atlantic contact was made. Confirmation of the callsign VO1MD has now been received.

Another Canadian group backing the project is the Sydney Amateur Radio Club of Nova Scotia and its

station will be located in the Marconi Museum, Glace Bay - the site from which the first east-west Atlantic contact was made. The callsign there will be VE1MD.

Last but by no means least, from Bologna in Italy - the birthplace of Marconi - the Sasso Marconi Radio Club will run a station using the official Marconi callsign, IY4FGM.

Such is the enthusiasm of all those taking part that the event now looks likely to be held annually, taking place on a date as near as possible to Marconi's birthdate. This year's event will start at midnight GMT on 22 April and run for 24 hours until midnight 23 April. Operation will be in the 80m to 10m bands, using SSB only this year, and the Cornish club hopes to be active between the following frequencies:-

3770-3780 kHz (80m)
7070-7080 kHz (40m)
14.270-14.280 MHz (20m)
21.250-21.260 MHz (15m)
28.530-28.540 MHz (10m)

Unlike most special event stations, it is not the intention of the group to work as many stations as possible in a given time. They hope instead that as many stations as possible will attempt to make contact with all the participating special stations listed above. With this in mind, the Cornish club will be offering an award to any station who can work five out of the six special stations. All direct QSL cards for GB4IMD and award claims should be sent to:-

C.R.A.C.
PO Box 100
Truro TR1 1XP

Further details will be given nearer the date, but in the meantime you can find out more by contacting any of the following, all of whom are QTHR:-

Monty, G4ZKH
Brian, G4QDV
John, G0FKF
Mike, G4WQL
Tony, G4ZUI
Norman, G4USB.

RNARS NEWS:

The Royal Naval Amateur Radio Society (London HMS Belfast Group), will be active from Thursday 17 March to Wednesday 13 April to mark the 50th anniversary of the launch of HMS Belfast and they'll be using the special callsign GB5RN.

Activity will depend on the availability of operators except from 2-10 April, when the station will be operational on a full-time

basis. The preferred frequencies are as follows:-

CW - 1845, 3520, 7020 kHz,
10.117, 14.052, 18.071,
21.052, 21.120, 24.900,
28.052, 28.120,
144.035 MHz.
SSB - 1970, 3660, 3740, 7052,
7088 kHz, 14.140, 14.190,
14.278, 14.310, 14.335,
21.360, 28.410, 28.933,
144.375 MHz.
FM - 145.350, 145.400 MHz.

A special QSL card will be available and will be sent via the QSL Bureau. If you wish to QSL direct, please send your card together with a stamped addressed envelope to Derek Costello, G4UKJ, who is QTHR in the latest callbook.

RAIBC NEWS:

There's been a lot happening in RAIBC recently, including putting the entire membership records on to computers. This helps to provide a much better service to RAIBC members by permitting a faster response time in dealing with needy cases. The magazine, 'Radial', is now in the hands of a new and more reliable printer, although the despatch is still handled 'in-house' by members of the committee. Finances have recovered somewhat from the all-time low of last summer, but funds are still needed urgently to purchase good second-hand equipment when the opportunity and need arises.

There are now almost 2,000 full members, local representatives and supporters of RAIBC and although the committee has appointed zonal co-ordinators for Scotland, Northern Ireland, the north of England, the Midlands and Wales, they are still looking for zonal co-ordinators for the south west and south east who have some administrative experience and an interest in the aims of RAIBC.

All donations are now acknowledged and RAIBC is grateful for any legacies and equipment. Further information can be obtained from Angus McKenzie, G3OSS who is QTHR in the latest callbook.

ATHERSTONE ARC 2m DF HUNT:

Following the very successful 2m DF hunt competition held last year, the Atherstone ARC has decided to make the event an annual one. The competition will be in four individual stages, and the winner's shield will be awarded to the highest scoring entrant who has taken part in at least three of the stages. Entrants may be individuals or teams, perhaps representing their own club. Each event will

start at 7.30pm and finish around 9.30pm in a local hostelry! Only 2m FM is required and at least two of the stages will be designated as 'portable', where the hidden station is located off the road but on public land - take your wellies! The dates of the four stages are:-

Monday 23 May
Monday 11 July
Monday 8 August
Monday 5 September

The event is not arduous and makes for a good evening's entertainment. A small entry fee is charged to cover the cost of administration and the winner's shield. Full details can be obtained by sending a 9"x4" stamped addressed envelope to the club secretary, John Arrowsmith, G4IWA, who is QTHR in the latest callbook. Good hunting!

MARCONI TO MICROWAVES:

That was the name of an exhibition which was held at Stamford Museum, in Lincolnshire from 8 December 1987 to 9 January 1988. The exhibition was mounted jointly by the museum and the Stamford & DARS. It marked fifty years since the death of Marconi - the 'father' of radio - in 1937 and the 75th anniversary of the founding of the RSGB in 1913. Part of the display was devoted to photographs of Marconi and his inventions, together with examples of early commercial and amateur radio equipment. The other part of the display was a working demonstration of amateur radio in the form of a special event station, GB5SM, and a static display covering some of the work of the RSGB. Many amateurs and non-amateurs visited the exhibition and had the opportunity of passing greetings messages. The exhibition was the brain-child of Peter Fancourt, G3HEE, who - together with members of the Stamford club - managed to find some very old and interesting pieces of equipment. These included a two-foot tall water-cooled transmitting valve from BBC Brookmans Park (hope that didn't take Radio 4 off the air for the duration of the event - Ed) and a good example of a suitcase spy-radio used by the SOE and other clandestine organisations during WW2. Much of the equipment was loaned by amateurs around the country, and particular thanks go to the National Wireless Museum on the Isle of Wight for their assistance.

The Society is hopeful that the 'Marconi to Microwaves' exhibition will form part of the exhibition of radio equipment on show during this year's national convention.



Left to right: Peter, G3HEE; Olaf Scutsch, a visitor from Denmark; Paul, G4OSJ, Chairman of the Stamford & DARS (kneeling); Mick, G0IET; Jim, G4PZB and Hugh, G4MTX (both seated).



Part of the display of radio equipment at the Stamford Museum's 'Marconi to Microwaves' exhibition.

THE KEN STOREY CONSTRUCTORS TROPHY:

Each year the Goole Radio & Electronics Society holds a constructor's competition. The competition is open to all home-brewers in Humberside, Yorkshire and north Lincolnshire and the winner is awarded the 'Ken Storey Constructors Trophy' in memory of G3LEA, a keen home-brewer. This year, the judging will take place on Friday 18 March and although there is not much time to get your entries in, further details can be obtained from:-

Richard Sugden, G0GLZ
tel: Goole 69968.

GREEK SPECIAL EVENT STATION:

Not only is 1988 the 75th anniversary of the founding of RSGB, it's also the 30th anniversary of the Radio Amateur Association of Greece. To mark the importance of this occasion, Greek telecommunication authorities have granted the special call sign SX1RAAG to the official club station of the Greek national society, RAAG. The station will be active between midnight UTC on Saturday 30 April and midnight UTC on Thursday 30 June. A special QSL card will be sent via the bureau for all contacts on all HF bands from 160m to 10m on CW and SSB (30m CH only) with the exception of the 17m and 12m bands.

C.E.R.A.C. SPECIAL PREFIX:

The Council of Europe Radio Amateur Club, call sign TP2CE, has informed us that it will be using a special prefix, TPO, to mark the 1988 European Campaign for North-South Solidarity. There will be three periods of activity during the year.

The first period will be from 11-13 March and the second will be from 24-26 June. The dates of the third period have not yet been finalised, but it is hoped that it will coincide with the visit of His Holiness Pope John Paul II to the Council of Europe Headquarters on 8 October. If all goes according to plan, the call sign used on that occasion will be TPOPAK.

JOTA '87 REPORT:

We've just received a copy of the 1987 JOTA report from Les Mitchell, G3BHK, and it makes very interesting reading. However, there is one problem which Les faces each year when compiling the report and that is the poor response from JOTA stations who do not send in their individual reports. Len only received a disappointing 21.5% return, so many of the statistics

he has produced for the report had to be based on 'guesstimation'. The true picture may be quite different. Having said that, here are his statistics for the 1987 event with the figures in brackets for 1986:-

373 (341) UK JOTA stations took part in the event and made contact with 443 (490) different scout stations in 53 (47) overseas countries. Of the 81 (96) stations who submitted a report, 67 (86) gave details of the numbers of scouts and guides involved. At those 67 stations, 1109 (1668) scouts and guides were involved in running the stations or were present as long-term visitors, 1591 (2456) came along for a short visit together with 1753 (1727) parents, friend or members of the general public.

If those figures were taken as a typical example for all of the 373 UK JOTA stations, a total of around 15,000 scouts, guides, cubs, Brownies, Venture Scouts, Rangers and Leaders would be a fair estimate of the level of involvement around the country. Add to that nearly 10,000 parents, friends and members of the public and we see around 25,000 people in the UK alone who may have come into contact with amateur radio in one weekend. Of course, this is only a guesstimate based on the reports sent in to Les.

This year's Jamboree On The Air will be held over the weekend of 15/16 October.

Each year, Len Jarrett, VE3MYF, compiles the World JOTA Report based on the information from each country's national report. Typically it runs to around 25-30 pages of A4 and is available from the World Scout Bureau in Geneva from late March or early April. Copies are also available in the UK from:-

Duncan Wheelhouse, G8TRP
Fern Lea
Lazonby
Penrith
Cumbria CA10 1BG
tel: 076883 569

The exact cost will not be known until the report is printed, but is usually around £2.50. (TNX G3BHK)

Incidentally, Duncan is the editor of the "Scout Radio Newsletter" which is published quarterly. The next three editions will be published at Easter, in July and just prior to the JOTA weekend in October, and you can obtain a regular copy by sending £3.00 (£3.50 for overseas) for a year's subscription to Duncan at the address above. Cheques should be made payable to "Scout Radio

Newsletter" or you can pay by Giro into account No. 16 216 4904. Back issues, to July 1986, are available for £3.00 the set.

MORE POWER TO OTLEY ARS:

Fifteen newly licensed members of the Otley ARS between the ages of 15 and 70 are presently involved in building what for most is their first home-brew project - an 8A power supply. The club has designed and had made all the transformers and has been able to provide the ready-bent metalwork. Other members are providing advice and assistance with the project, in an aim to encourage the art of home-brewing. The club hopes that completion of this project will encourage the participants to look at building other amateur radio equipment in future and will provide additional interest to youngsters who may be put off taking up amateur radio by the spiralling costs of black boxes. Good idea, that - how about some clubs running a junior constructors' section to build a simple receiver?

ITALIAN 80 METRES DOWNGRADED:

We hear that the "shared primary" status of Italian amateurs between 3.5 and 3.8 MHz has been downgraded to secondary status. The Italian government is in the middle of preparing a national frequency plan for all frequencies below 27.5 MHz, in conjunction with the Italian Ministry of Defence.

G3PAO MEMORIAL LECTURE:

The Verulam ARC will be holding its annual 'G3PAO Memorial Lecture' on Tuesday 22 March at the RAFA HQ, New Kent Road, St. Albans, starting at 7.30pm. This year's lecture is entitled "Pan-European Cellular Radio - a glimpse of things to come" and will be given by Chris Morcom, G3VEH.

Talk-in will be provided on S22 and all are welcome. There are bar facilities at the venue and the club will be running a humper raffle. Further details from Hilary, G4JKS on 0727-59318.

WORK THE WALL:

Hadrian's Wall is one of the finest military monuments in the whole Roman Empire. It is 72 miles long, stands at a height of 16 to 18 feet and averages 10 Roman feet thick.

During the weekend before Easter, the Hazelrigg ARC will be running a special event station from the Vallum Lodge Hotel at Bardon Mill. This is about 8.2 miles east of Greenhead on the B6318 and about 32 miles west of

Newcastle. The station will be set up in a glass fronted shop, adjacent to the hotel with a large carpark all around it and the group hopes the hotel will be able to offer out-of-season accommodation rates to visitors.

The station should be on the air from Friday evening, 25 March and close down on Monday morning, 28 March. Activity will be in the 80m, 20, 15m, 10m and 2m bands using all modes. The callsigns will be GB1HW and GB4HW and special QSL cards will be available. There is lots to do in the area and visitors will be very welcome. Further details can be obtained from Michael, G8BGU.

EX-G RADIO CLUB NEWS:

The Ex-G Radio Club was founded in 1959 by Reg Cherrill, W3HQO, a native of Kidderminster, and others with a similar background and love of Great Britain and its citizens. Full membership is open to all amateurs born in Britain and now living abroad. Associate membership is open to any amateur living abroad who is not British born but whose parents or spouse were. Details of membership can be obtained by sending a stamped addressed envelope to:-

Ken Haswell, GM2CWL
6 Cameron Avenue
Balloch by Inverness
Scotland, IV1 2JT.

The "Ex-G Bulletin", published quarterly, contains about 20 pages of articles and information about the activity of members and the editor, George Nixon, G13ION/W6 is always looking for interesting items. George can be contacted at 1140 Sherman Avenue, Menlo Park, CA 94025, USA.

The club also runs a number of nets and these take place as follows:-

Sat 1830z "CW Net"	- 14.065 MHz
Sun 1730z "Canadian"	- 14.105 MHz
Sun 1900z "Worldwide"	- 14.346 MHz
Daily 1230z "Family"	- 14.333 MHz
	- 21.410 MHz
	- 28.850 MHz

A more recent innovation is the informal net on or around 7090 kHz daily at 1200z.

GB4XXX:

Three amateurs, G4LPX, G4AUX and G4CAX, will be active from Chwilog in north Wales (NGR: SH 43 38, Locator: IO72TV) between Thursday 10 March and Sunday 13 March. The callsign will be GB4XXX, since all the callsigns of the operators end in 'X'. Activity will be in all HF bands and, hopefully, 2m. This will be their sixth DX-pedition.



Operators of 9N7YDY and 9N5QL seen here with Krishna B Khatri, 9N1MC, Head of the Licensing Division of the Ministry of Communications, Nepal. (Left to right, front row: Krishna B Khatri, 9N1MC; Iris Colvin, W6QL; Toshikazu Kawanishi, JA8RUZ; Masakazu Seizaki, JN1XWO - back row: Kuniya Koizumi, JH7WKU; Lloyd Colvin, W6KG; Tetsuya Sakabe, JA7XBG and Yasuo Makiyama, JA7BOB.

KING'S BIRTHDAY STATIONS:

Two special amateur radio stations were set up to celebrate the 43rd birthday of His Majesty King Birendra Bir Bikram Shah Dev of Nepal on 29 December 1987.

The first, 9N7YDY, was issued to the Japan UNICEF Ham Club of Hokkaido, Japan and ran from 21-28 December. In addition to the 10m, 15m and 20m bands, the club was allowed to use the 40m, 80m and 160m bands for the first time, with SSB, CW, RTTY and packet being the modes used.

The second station, 9N5QL, was issued to Iris, W6QL, and Lloyd Colvin, W6KG of the YASME Foundation, California. Operation began on 27 December and permission was given for the callsign to be used until they managed to complete DXCC from Nepal. By 7 January they had more than the 100 countries required and on Friday 8 January, Iris and Lloyd set off for Burma in an attempt to operate from there before continuing to Sri Lanka.

Both callsigns were issued by Krishna B Khatri, Head of Licensing at the Ministry of Communications, Kathmandu, Nepal. Krishna is also licensed as 9N1MC and is a very keen and active amateur. Amateur radio is not well understood by either the Government or the general public in Nepal but Krishna is working very hard to promote the hobby. He receives support from both ARRL and RSGB as well as

from publishers of the many DX bulletins around the world who send books and other publications to him free of charge to help in his efforts to promote amateur radio in Nepal.

QSL BUREAU NEWS:

Ted Allen, G3DRN, the RSGB's QSL Bureau Manager, has written to say that many members are still not sorting their outgoing QSL cards alphabetically by prefix. Not only does this delay your own cards but slows down the whole operation of the Bureau by adding to its workload. The guidelines for using the Bureau are given in the current callbook as well as being sent out to all new members of the Society with their membership pack.

One question which arises quite frequently is what to do when operating away from home in a location which involves a change of prefix (eg. a G station working /M in Wales or a GM working /A in England). The answer's quite simple - just send a separate set of envelopes to the appropriate Sub-Manager who deals with the callsign series for that country. He will receive cards resulting from any contacts you may have made. This will cut out the need for double-handling, save time and postage, and prevent any possible loss or damage to your cards.

A full list of the QSL Sub-Managers can be found in the

current callbook or can be obtained by writing to the Membership Services Department at RSGB Headquarters.

There is a change of address for the QSL Sub-Manager dealing with the G4NAA-NZZ series of call signs. Envelopes for the receipt of cards in that series should now be sent to Mr M J Musgrave, G4NVT, at:-

49, Vowler Road
Langdon Hills
Basildon
Essex SS16 6AQ

GB75IOM:

The Isle of Man ARS will be running a special demonstration station on Sunday 20 March as part of an exhibition covering all aspects of amateur radio. The exhibition will be held at the Sea Terminal in Douglas and will be open to the general public. The IOM ARS has also invited youngsters from all the island's schools in an attempt to promote the hobby as part of the "Youth into Electronics via Amateur Radio" project, to be launched officially at the RSGB National Convention in July.

GB75IOM will consist of two HF stations, two short wave listener stations, one VHF station, plus slow-scan, packet and RTTY. There will also be an exhibition of antique and home-brew equipment. Further details can be obtained from Mr Mike Dunning, GDOHYM. Incidentally, this year is also the 40th anniversary of the Isle of Man Amateur Radio Society and we'd like to extend our best wishes and congratulations to all its members.

Helplines (cont from p.194 col.3)

is an instructor at the Grindale Parachute Centre near Bridlington. During the descent, Roy hopes to make contact with as many amateurs as possible using Morse. All the money raised by this venture will go towards the Humberside County Scout funds and the County Training Centre. If you don't think you'll be able to contact Roy during his descent but you'd still like to support him, you can apply for a sponsorship form. Roy's telephone number is Hull 812115.

VHF AWARDS MANAGER WANTED:

After 21 years of sterling service, Jack Hum, G5UM, has decided to stand down from the post of Honorary VHF Awards Manager.

Jack took over the post from G3GMY in 1966 and since then he's issued countless operating awards and contest certificates. As a result of his decision to stand

down, the post of VHF Awards Manager will become vacant and may be filled by any Corporate Member of the Society. Brief details of the VHF Awards Manager's duties are as follows:-

- To be responsible for issuing operating awards and certificates for all frequency bands above 30 MHz. This includes scrutinising applications to verify their accuracy and conformity with the rules for the particular award.
- To issue certificates for contests on all frequency bands above 30 MHz as directed by the VHF Contests Committee.
- To scrutinise applications made by UK amateurs for ARRL operating awards in the VHF bands (previously carried out by G8VR).
- To be responsible to both the VHF and Microwave Committees and to advise on the rules for operating awards.
- To liaise with RSGB Headquarters for the production of awards rules, application forms and certificates.
- To produce an annual report covering the year's activities for inclusion in Radio Communication.

The VHF Awards Manager is appointed by Council following recommendations made by the VHF and Microwave committees and the appointee will become a Corresponding Member of both committees.

Applications are invited from Corporate Members of the RSGB who should write initially to the Chairman of the VHF Committee:-

Mr Malcolm Appleby, G3ZNU
Willowbank
Chapel Road
Otley
Ipswich IP6 9NX

...enclosing a brief CV which gives details of any relevant experience, positions held in local or national clubs, and of their interest in VHF and/or microwaves.

DTI TELEPHONE NUMBERS:

Just to clarify our piece on this a couple of months ago, there are three DTI telephone numbers which you might like to make a note of in case you need to use them;

General switchboard -
01-215 7877
Amateur radio section -
01-215 2263
Answerphone (publications etc)-
01-215 2072

Council Brief (from p.196 col.3)

The Secretary referred in his report to the work which had been undertaken in relation to publications. He was looking into the Society's book pricing policy as a result of complaints which had been received in recent months; one such at the recent Annual Meeting. At the present time, he was looking into the question of overheads which needed to be considered in the light of the different types of publications and items which the Society offered for sale. Council considered this a matter of priority and called for a report from the Finance and Staff Committee in time to be considered at its next meeting. The Secretary also referred to the recently formed Publications Management Group which had been tasked with bringing together all aspects of the Society's book publication programme. One main aspect of the work of the new Group was to consider desk top publishing and the Secretary reported on progress made to date. The Secretary also reported that the HQ Manager was looking into further ways of improving the HQ telephone system. Other matters referred to by the Secretary included further information with regard to bringing young people into amateur radio, a brief report on various Government spectrum reviews including progress by IAC on the CSPI response, and a communication which he had received from John Klein, the son of Rene Klein, one of the RSGB founders who had been pictured on the front cover of the January issue of Radio Communication.

Council considered a number of recommendations from the VHF Contest Committee and one from the EMC Committee.

The Secretary reported that a number of clubs and groups had put forward proposals with regard to the venue of the 1988 Annual Meeting of the Society. After the various proposals had been discussed, Council voted unanimously that the 1988 Annual Meeting would be held at the University of Manchester Institute for Science and Technology, subject to making sure that the venue was suitable. Members of the Northern Amateur Radio Society Association were thanked for their comprehensive proposal. Letters would be sent to the other groups who had also put forward suggestions requesting that they consider submitting their proposals again for 1989.

(cont p.206 col.1) ▶

Events Diary

CLUB NEWS

Beginning with this issue, the "Events Diary" has been expanded to include Club News. However, in an attempt to reduce the number of pages previously used for Club News, we are using a more abbreviated format listing clubs alphabetically under counties and giving the date and subject of the meeting. As in C&RS, latter nights and committee meetings are not listed. The full details of when and where clubs meet, the contact person and telephone number will be published twice yearly in the UK Callbook and twice yearly (90% out of phase) in the Bulletin. However, changes of venue and details of any new clubs will be included in the list below.

AVON:

- * Bath & DARC - 2, Quiz; 16, VHF on the air/pra-AGM meeting; 30, video.
- * Bristol ARC - 3, rebuilding shack; 10, testing aerials; 30, on the air. *NEW VENUE* St. Aiders Church Scout Hut, Fir Tree Lane, St. George, Bristol, Thurs 7.30pm.
- * Bristol FM IV Group - 22, AGM/Social.
- * Bristol RSCB Group - 28, Ladies' night/Video "A Day in the Life of Bristol".
- * North Bristol ARC - 12, lecture "Soldering on Your Own PCBs"; 17, RITV; 26, 80m activity.
- * South Bristol ARC - 2, microwave workshop; 9, GRP activity; 16, inter-club 'Bullseye' contest; 23, contest planning; 30, RSCB 111ms & videos.
- * Thornbury & DARC - 8, lecture "Converting 27 MHz Rigs"; 22, project.
- * Weston-super-Mare ARS - 14, illustrated talk "Amateur Radio in Kenya 1954 to 1986"; 28, constructors.

BEDFORDSHIRE:

- * Sharnold & DARC - 3, junk sale; 10, lecture "ORP"; 17, radio quiz; 24, brewery visit.

BERKSHIRE:

- * Burnham Beches RC - 7, AGM/lecture "CGA Lord"; 21, junk sale.

BORDERS:

- * Kelso ARC - 7, operating; 14, project; 21, lecture; 28, visit.

BUCKINGHAMSHIRE:

- * Chesham & DARS - 9, technical topic; 23, lecture.

CAMBRIDGESHIRE:

- * Cambridge & DARC - 4, constructors; 18, lecture "Another Part of the Spectrum"; 25, AGM.

CENTRAL:

- * Stirling & DARS - *NEW VENUE* 11rosk, nr Stirling, Thurs 7.30pm. tel: Jim, OM042M 0877-30714.

CHESHIRE:

- * Chester & DARS - 22, "40 Years On".
- * Mid-Cheshire ARC - 2, activity; 9, contest review; 16, lecture "Coax Cables"; 23, rally planning; 30, construction.

CORNWALL:

- * Cornish RAC - 17, activities.
- * Cornish RAC Computer Section - 14, lecture.

DERBYSHIRE:

- * Derby & DARC - 2, junk sale; 9, illustrated talk "From Russia With Love"; 16, on air; 23, AGM; 30, visit Rugby Royal Observer Corps HQ.

DEVON:

- * Exeter ARS - 14, lecture "Pre-War Transmitters & Receivers".
- * Plymouth RC - 14, visit British Aerospace.
- * Torbay ARS - 12, annual dinner; 26, slide show "OX trips".

DORSET:

- * South Dorset RS - 1, junk sale.

Co DOWN:

- * Bangor & DARS - 4, lecture "Choice".

ESSEX:

- * Braintree & DARS - 7, DTI 111m show.
- * Chelmsford ARS - 1, lecture "General Servicing of Amateur Radio Equipment".
- * Colchester RAS - 3, lecture "Batteries, Chargers & Analysers"; 17, lecture "British Red Cross".
- * Loughton & DARS - 25, RSCB film show.
- * Southend & DARS - 4, lecture "Radio

Communication & telemetry Used by Anglia Water Authority"; 11, annual dinner.

Co FERNMAGH:

- * Lough Erne ARC - 16, lecture "RSCB".

GRAMPIAN:

- * Aberdeen ARS - 4, March; 11, Pocket Radio Demonstration.

GREATER LONDON:

- * Acton, Brantford & Chiswick ARC - 16, discussion "Members' Problems".
- * Civil Service ARS - 7, lecture "Lightning Protection".
- * Ealing & DARS - 8, Morse training; 15, preparation for RITV contest; 22, lecture "Innovations in Japanese Equipment"; 29, junk sale.
- * Edgware & DARS - 10, technical team game; 24, lecture "Some Modern Developments in Terrestrial Broadcast Transmitters".
- * Silverthorn RC - *DETAILS NOT IN CALLBOOK* meets Fridays, 7.30pm at Friday Hill House, Simmons Lane, Chingford, E4.
- * Sutton & Cheam RS - 18, constructional contest; 26, annual dinner.

GREATER MANCHESTER:

- * South Manchester RC - 4, lecture "The Mechanism of Colour Photography"; 11, discussion "Future Club Policy"; 18, lecture "CadCam"; 25, surplus equipment sale.
- * Stockport RS - 9, Microwave Modules; 23, lecture "Satellite TV".
- * Wigan & DARC - 8, RAE "Simple & Practical Electronics"; 15, illustrated lecture "Introduction to Amateur Radio"; 21, RAE revision.

GWENT:

- * Blackwood ARS - 4, BBC Engineering lecture "Colour TV Fundamentals"; 18, packet radio demonstration.
- * Ebbw Vale College RS - *NEW* meets at College in Room 8, Sefcer Block, 7pm, CW11KW tel: 0495-370286.

HAMPSHIRE:

- * Andover RAC - 2, talk "The RLO, G3KMU"; 16, 2m contest planning.
- * Fareham & DARC - 2, lecture "Radio Security Service - Part 2"; 16, lecture "FAX"; 30, lecture "Radio Measurements".
- * Farnborough & DARS - 9, lecture "PSN Data Modem"; 23, "The RLO, G3KMU".
- * Horndean & DARS - 3, lecture "Introduction to Amateur Radio".
- * Itchen Valley ARC - 11, AGM; 12, annual dinner; 25, lecture "Build Your Own Black Box".
- * Lyndington & DARS - 19, lecture "Experience With -7MHz Operating".
- * Three Counties ARC - 2, lecture "CW and the Test"; 16, lecture "Air Traffic Control"; 30, lecture "Radio Controlled Models".
- * Waterside SMC - 22, lecture "The RLO, G3KMU".
- * Winchester ARC - 18, lecture "ENC".

HEREFORD & WORCESTER:

- * Bromsgrove & DARC - 11, AGM.
- * Kidderminster & DARC - 1, lecture "VHF/UHF Aerials".
- * Malvern Hills ARC - 8, lecture "Measurement Techniques".
- * Vale of Evesham ARC - 4, Microwave Modules.
- * Wythehill RC - 8, on air; 15, rally post-mortem; 22, on air; 29, construction.

HERTFORDSHIRE:

- * Cheshunt & DARC - 2, lecture "Data Transmission"; 16, lecture "50 MHz One Year On"; 30, lecture.
- * Stevenage & DARS - 1, construction; 15, AGM.
- * Verulam ARC - 8, workshop; 22, C3PAO Memorial Lecture "Pan-European Cellular Radio".

HUMBERSIDE:

- * Goole R&ES - 4, junk sale; 11, visit; 18, judging the Ken Storey Constructors Trophy; 25, social.
- * Hornsea ARC - 2, lecture "Farming & Farm Machinery"; 9, lecture "Ham Radio Activities".

ISLE OF WIGHT:

- * Binstead ARS - 28, lecture "Astronomy".

KENT:

- * Meopham Parish RC - 13, lecture "Amateur Radio Awards".
- * RC of Thanet - 8, lecture "Compact Disc Players"; 22, lecture "Bomb Disposal in WNZ".
- * SE Kent (VMA) ARC - 9, lecture "Frequency Counters and How they Work"; 23, construction contest.

LANCASHIRE:

- * Bury RS - 3, lecture "Clandestina Radle".
- * Central Lancs ARC - 7, HF on air; 21, lecture "Working for HF Awards".
- * Thornton Clevelleys ARS - 14, surplus equipment auction; 28, lecture "Computer Frauds".

LINCOLNSHIRE:

- * Lincoln SMC - 2, on air; 9, video "Weather Satellites"; 16, on air; 23, illustrated lecture "Raynet"; 30, on air.

MERSEYSIDE:

- * Liverpool & DARS - 1, quiz; 8, open night; 11, Old 11mers' Get together; 15, lecture "First Aid Update"; 29, lecture "Experiences".

NOTTINGHAMSHIRE:

- * Worksop ARS - 1, magazine sale; 15, lecture?

POWYS:

- * South Powys ARC - 1, lecture "Metars Part 3"; 15, social.

SOUTH GLAMORGAN:

- * Barry College of FE RS - 17, video "Amateur TV as Used in Our Hobby".
- * Barry RAF St. Athan ARC - *CHANGE OF DAY* now meets Tuesdays.
- * BI South Wales DARC - *NEW TELEPHONE NUMBER* Mr J Foley, 0222-379619.
- * Cardiff RSCB Group - 14, lecture "HF Liraara".
- * Highfields ARC - *NEW SECRETARY* Mr R Solfick, CW8BU tel: 0446-711146.

SOUTH YORKSHIRE:

- * Sheffield ARC - 7, lecture "Principles of Aerials"; 28, lecture "How To Give a Talk".
- * UK FH Group (North) - *CHANGE OF VENUE* now at the Dove Inn, Doncaster Road, Barnsley, 1st Sunday of month, 7.30pm. Details CAUHA OTHR.

SUFFOLK:

- * Ipswich RC - 9, constructional contest; 30, South Anglian Repeater Group.

WEST GLAMORGAN:

- * Llanelli Colehill ARS - 14, lecture "General Fault Finding".

WEST MIDLANDS:

- * Wordsley RC - venue details incorrect in Callbook and Radio Communication. Meetings at the Rose & Crown, High Street, Wordsley. Secretary COADM, OTHR.

WEST SUSSEX:

- * Horsham ARC - 3, grand spring junk sale 7pm.
- * Mid-Sussex ARS - 3, discussion "1988 Contests"; 10, lecture "Prospects for Solar Cycle 22"; 24, lecture "The Banana Transmitter".

WEST YORKSHIRE:

- * North Wakefield RC - *CHANGE OF DAY* Mondays, not Thursdays as in Radio Communication. 3, visit "Dirkshaw Fire Station"; 10, RSCB RLO G32X2; 17, club project; 24, lecture "Power Generation & Distribution".
- * Wakefield & ORS - 1, on air; 8, lecture "A Morse Adaptor for Your FM or Other 1X"; 15, club project surgery; 29, video & photos "Club Activities".

WILTSHIRE:

- * Trowbridge & DARC - 30, lecture "2m Operation & Working OX".

Items for inclusion in the MAY issue must be sent to HQ marked "Club News - Bulletin", and be received by Monday 21 March latest.

MOBILE RALLIES

This is a list of all rallies, exhibitions and conventions notified to HQ (as at press date). Items are given in detail for the next three months inclusive and in brief thereafter. Please send detailed information, including contact call sign and telephone numbers direct to HQ and marked "Bulletin".

5 MARCH

- * Blue Star Rally - High Gosforth Park (Newcastle Racecourse). Usual traders, refreshments. Details Terry G6VEC, tel: lyneside 2866908.

6 MARCH

- * Welsh Mobile Rally - The Barry Leisure Centre, off Hulton Road, Barry. Details Mike CW8CHU, tel: 0446-7111426.

Events Diary

13 MARCH

- * South Essex ARS Mobile Rally - The Poddocks Community Centre, Canvey Is, Essex. Rally opens 10am. Talk-in on 522. Details G08BN, tel: 0268-755350.
- * 3rd Annual Wythall RC Rally - Wythall Park, Silver Street, Wythall (south of Birmingham on A435, 2 miles from M42 junc.3). Opens 12 noon, 3 large halls, usual traders, junk and flea market, bar & snacks. Talk-in on 522. Details Chris GDEYO, tel: 021-430 7267.
- * Bury HamFeast - New venue, The Castle Sports Centre, Bolton Street, Bury, one mile from M66. 12,500 sq ft, all on ground floor, usual traders, bar and catering facilities. Details C4JAG, 07HR.

20 MARCH

- * 8th Annual Pontefract Components Fair - Carleton Community Centre, Pontefract. Opens 11am, trade stands, bookstall, prize draw, car-boot sale, bar and refreshments. Talk-in on 522. Details Collin GDAAD, tel: 0977-43101.
- * Mid-Davon Rally - Pannier Market, Tiverton (8 mins from M5 junc.27). Opens 10am, 2 halls of trade stands, bring & buy stall, display, snack bar and full refreshment facilities. Talk-in on 522, well signposted. Details G4TSH, Mid Devon Rally, PO Box 3, Tiverton, Devon.
- * Cambridgeshire Repeater Group Junk Sale Rally Extravaganza - Phillips RCS (Pya Telecom) Canteen, St. Andrews Road, Chesterton, Cambridge. Opens at 10.30am (auction items accepted from 10am). Junk sale auction, bring & buy stall, trade stands, refreshments. Talk-in on 522 and via G83PY by GSP1. Details G8XMS, tel: 0220 23-3362.

27 MARCH

- * White Rose Rally - The Refectory, University of Leeds. Details G0EGH, tel: 0532-676368.

10 APRIL

- * North Cornwall Radio Rally - Launceston Town Hall. Opens 10.30am, talk-in on 522 by Launceston ARC. Details Haggle, RS90696 tel: Launceston 5632.
- * Lough Erne ARC Rally - Killyhevlin Hotel, Enniskillen. Details Billy, tel: 0365-24905.

17 APRIL

- * Trallord Rally & Components Fair - Lancashire County Cricket Ground (Old Trafford), Talbot Road, Old Trafford, Manchester. Opens 11am (10.30am for disabled visitors). Usual traders and attractions, bring & buy stall, refreshments, cash draw, talk-in on 522. Details Graham G1JK, tel: 061-748 9804.

24 APRIL

- * BAIC Rally - Rugby Post House Hotel, Crick, Northants. (N1 junc 18). All the usual traders situated in a marquee. Lecture programme and demonstrations including satellite TV in the hotel. Details Trevor G8CJS, tel: 0532-670115.
- * Swansea ARS Rally - *NEW VENUE* Swansea Leisure Centre. Opens 10.30am. Trade stands, bring & buy, bookstall, refreshments, raffles, talk-in on 522 and via RB6. Details Roger G4KSH, tel: 0792-404422 evenings.
- * Harske-by-the-Sea Rally - Harske Community Centre, High Street, Harske, nr Saltburn, E.Cleveland. Details Jimmy G1VLC, tel: 0642-219586.

1 MAY

- * RSCB VHF CONVENTION - Sandown Park Racecourse, Esher, Surrey. Usual traders, comprehensive lecture programme, large RSCB bookstall, RSCB Committee stands. Details G3FZL. Trade - Les, G5HD tel: 040 928-342.
- * 5th Anglo-Scottish Rally - Tait Hall, Kelso. Opens at 11am, all the usual attractions. Details Andre G43VBL, tel: 0573-24664 (evenings).

2 MAY

- * Mid Cheshire ARS Rally - Civic Hall, Winsford, Cheshire. Opens at 11am. Details Mrs Fraser tel: 0606-553401.
- * Doncaster Radio Rally - Bircoates Sports Centre, nr Bawtry, Doncaster. Details Audrey Wilson, tel: 0302-721259.

8 MAY

- * Drayton Manor Rally - Drayton Manor Park, nr Uxbridge, Stalls. Details Norman, tel: 0274-222 9787.
- * Yeovil ORP Convention - Preston Centre, Hanks Dale, Yeovil. Opens at 9am. Trade stands, junk sale, lecture programme, old & new ORP rigs, refreshments. Talk-in on 522 from 9.30am. Details Dave G1MMH, tel: Yeovil 79804.

15 MAY

- * 31st Northern Mobile Rally - Great Yorkshire Showground, Nantogate, Opens at 10.45am. More traders, *RSCB stand*, children's show, raffles, bar & refreshments. Talk-in on 522 by G8DNMR. Details Harry G3C00, tel: 0943-602118.
- * Cambridge & DARC Radio & Car-boot Sale - Coleridge Community College, Rodegund Road, Cambridge. Opens at 10.30am (10am for

disabled), trade stands, bring & buy, car-boot pitches, refreshments. Talk-in on 522 by G2XV. Details Brian G4TRO, tel: 0223-353664.

- * Mid-Ulster ARC Mobile Rally - *NEW VENUE* The Silverwood Hotel, just off the Lurgan/H1 roundabout. All the usual activities and more. Oxford Island recreation area nearby. Details G13WEH, Q1HR.

22 MAY

- * Swindon & DARC Radio, Electronics & Model Engineering Fair *CHANGE OF DATE* - Science Museum, Wroughton, nr Swindon, Wilts, signposted from M4 junc 16. Opens 10am, all the usual amateur radio attractions plus museum, model railway swap-meet, model aircraft flying display, radio controlled boats and cars, model steam engine rally, helicopter rides, vintage vehicles, traction engines and many other attractions for the whole family. Talk-in on 522 by G825MX and 70cm by G83TD. Details Kan G8SFM, tel: 066689-307.

29 MAY

- * 12th East Suffolk Wireless Revival - Civil Service Sportsground, Bucklesham, nr Ipswich. Opens at 10am, all the usual attractions, children's play area, model flying display, good family day out. Details Jack G4IFF, tel: 0473-464047.
- * Plymouth RC Mobile Rally - Plymouth School, Plymouth, Plymouth. Opens at 10am, usual trade stands, demonstrations, raffles, refreshments. Talk-in on 522. Details Joe G1RXR, tel: 0752-662511.

IN BRIEF - More details later.

5 JUNE

- * Southend Mobile Rally - Rochway Centre, Rochford, Essex. Details G8EFC, tel: 0268-755331.
- * Spalding & DARS Mobile Rally - Springfield Arena, next to Springfield Gardens, Spalding. Details G4TWR tel: 0775-2940.
- * Bolton ARC Mobile Rally - The Deane Sports Complex, New York, Junction Road, Bolton. Details Kenneth G6ZJL, tel: 0204-696906.

12 JUNE

- * Elvaston Castle Mobile Radio Rally - Elvaston Castle Country Park, nr Derby. Details John G4PZY, tel: 0332-767994. Trade enquiries, Peter, G3MFU tel: 0332-700265 (evenings).
- * RNARS Annual Mobile Rally - HMS Mercury, nr Petersfield, Hants. Details G4UJR tel: 0703-557469.
- * Mid-Lanark ARS Open Day - *NEW VENUE* The Community Centre, Hewart Hill, by Motherwell (approx 1/2 mile from Wrangeholme Hall). Details David G1M5SA, tel: 0698-732403.

18 JUNE

- * RAFARS Golden Jubilee Radio Rally - RAF Halton Air Show, Wendover, nr Aylesbury, Bucks. *RSCB stand*. Details Terry G4PSH, tel: 0296-85760.

19 JUNE

- * Denby Dale Mobile Rally - Shelley High School, 5 miles SE of Huddersfield, W.Yorks. Details G3SDY tel: 0484-602905.

26 JUNE

- * 31st Longleat Mobile Rally - Longleat House, Wiltshire. Details Brian G4FRC, tel: Portlisshead 680140.

10 JULY

- * Worcester & DARC Strawberry Rally - Droitwich High School. Details Steve, tel: 0905-424151.
- * Sussex Mobile Rally - Brighton Racecourse. Details Bob G1105, tel: 0798-43641.

24 JULY

- * McMichael 88 Rally - Haymill Centre, Burnham, nr Slough. Details Bob G0B1T.
- * Anglian Mobile Rally - High Woods Sports & Leisure Centre, Severalls Lane, Colchester. *CHANGE OF DATE* Details G6HQ1, tel: 0206-862403.

31 JULY

- * Scarborough ARS Rally - The Spa, Scarborough. Details Ian G4UQP, tel: 0723-376847.

7 AUGUST

- * RSCB MOBILE RALLY - Woburn Abbey, Bedfordshire. Details RSCB HQ. Trade - Norman, G3MYV tel: 0277-225563.

14 AUGUST

- * Derby Rally - Lower Beare School, Derby. Details Jack G3KOF, tel: 0332-772361.
- * Flight Refuelling Hamfest '88 & Craft Fair - Herley, near Wimborne, Dorset. *CHANGE OF DATE* Details John G0API, tel: 0202-691649.

21 AUGUST

- * Red Rose Rally - Bolton Sports & Leisure Centre, Silverwell Street, Bolton. Details David G1100, tel: 0204-24104, evenings.

28 AUGUST

- * Torbay ARS Rally - STC Soelal Club, Brixham Road, Paignton, Devon. Details G3KZJ.

4 SEPTEMBER

- * 21st Preston ARS Rally - University of



15/16/17 JULY

RSCB 75 - NATIONAL CONVENTION: National Exhibition Centre, Birmingham. Details RSCB HQ. Trade - Norman, G3MYV tel: 0277-225563

This year's event will be the largest ever and will include an exhibition of amateur radio equipment from the last 75 years. Social events will be held on Friday and Saturday evenings. A special 75th anniversary luncheon will be held on Friday. G875AC (75th Anniversary Convention) will be active from 9-17 July.

18 JULY

RSCB HEADQUARTERS CLOSED FOR ONE DAY

19/20/21 JULY

RSCB 75 - HQ OPEN DAYS: Visitors welcome from 10am to 4pm each day. Details RSCB HQ

22/23 JULY

RSCB 75 - DATA SYMPOSIUM: Harrow School, Harrow-on-the-Hill. 2-day symposium covering all aspects of data communication.

24 JULY

RSCB 75 - FAMILIES' & ACTIVITIES DAY: An opportunity for all clubs, groups and societies to celebrate the RSCB's 75th anniversary in their own way. Almost anything goes but the event should involve the whole family and, if possible, the public. Please run an amateur radio demonstration. A prize will be awarded for the most original idea.

28 JULY

RSCB 75 - INTERNATIONAL SATELLITE SEMINAR: Near Guildford. By invitation only. Details RSCB HQ.

29/30/31 JULY

RSCB 75 - AMSAT UK COLLOQUIUM: University of Surrey, Guildford. First day special technical meeting by invitation only. Last two days full lecture programme and social events for all delegates. Details Ron G3AAJ tel: 01-989 6741 (social hours please)

FULL DETAILS AND BOOKING FORM FOR ALL EVENTS WILL BE PUBLISHED WITH THE APRIL OR MAY ISSUE OF RADIO COMMUNICATION

Lancaster. Details Godfrey G3D00.

* Telford Radio Rally & Exhibition - Details Martyn G3UKV tel: 0952-55416.

* 5th National Amateur Radio Car Boot Sale - The Shuttleworth Collection, Old Warden Aerodrome, nr Biggleswade, Beds. Details Tony G0C00.

11 SEPTEMBER

* Lincoln Hamfest '88 - Lincolnshire Showground, 4 miles N of Lincoln on A15. *RSCB stand*. Details John G8VGF, tel: 0522-25760.

* Venge ARS Rally - Nicholas School, Leinster Road, Basildon. Details Alan G4DJN, tel: 0277-624386.

17 SEPTEMBER

* Scottish Amateur Radio Convention - Aberdeen Exhibition & Conference Centre, Bridge of Don, Aberdeen. Details Graham G8BFX, tel: 0224-630526.

18 SEPTEMBER

* Bristol Radio Rally - Brunel's Great Train Shed, Temple Heads Station, Bristol. Details Dave G4MUB, tel: 0272-839855.

* Peterborough EARS Rally - Wirrina Sports Stadium, Bishops Road, Peterborough. Details Fred G4N00, tel: 0733-77032.

25 SEPTEMBER

* RSCB HF CONVENTION - Bellry Hotel, nr Oxford. Details RSCB.

* Harlow Mobile Rally - Harlow Sports Centre. Details G4KVR tel: 0279-22365 (daytime) or G4NIS tel: 0279-722622 (evenings).

2 OCTOBER

* Great Lumley AR & ES Rally - Community Centre, Great Lumley, Chester-le-Street, Co.Durham.

* Wakefield Mobile Rally - Details Steve G4RCH.

Events Diary

- * Welsh Amateur Radio Convention - Oakdale Community College, Blackwood, Gwent. Details B.Oavies G3KYA, tel: 0495-225825.
- 8 OCTOBER (Provisional)
- * Midlands VHF Convention - Details Peter G3UBX.
- 9 OCTOBER
- * Armagh Rally - Drumhill House Hotel, Armagh. Details G1BRNK.
- 28/29 OCTOBER
- * Leicester Amateur Radio Show - Granby Hall, Leicester. Details Frank tel: 0533-553293 daytime.
- 13 NOVEMBER
- * Bishop Auckland Radio Rally - Venue to be advised. Details Morris, tel: 0525-314638.
- * West Kent ARS Tonbridge Rally - Angel Centre, Tonbridge. Details Nigel G4KIU, tel: 0892-515321 or 515432.
- * Red Rose Rally - Bolton Sports & Leisure Centre, Silverwell Street, Bolton. Details David G1100, tel: 0204-24104, evenings.

THROUGHOUT 1988:

GB75RS - 75 (ANNIVERSARY) RADIO SOCIETY (GB): RSCB HQ, Lambda House, Potters Bar, Herts. *Watch out for GB75HO later in the year*

- 1 MARCH:
- GB0CDE - COASTAL DEFENCE "E": Fort Purbrook. Locator 10 90 LU. Details GDDH2.
- GB1MWS - MACCLESFIELD WIRELESS SOCIETY: Details G1MWS.
- GB2EG - EISTEDDFOD CASNEWYDD: Caerleon, Newport, Gwent. Details GW4ZUL.
- 3 MARCH:
- GB6DP - DENBY (DALE) PIE: Woolley, Wakefield. Details G4CJB.
- 4 MARCH:
- GB0C0X - COASTAL DEFENCE "X": Golden Hill Fort, Freshwater, IOW. Details G3RJUK.
- 5 MARCH:
- GB0CD1 - COASTAL DEFENCE "1": Bridge Nery, Gosport, Hants. Details G0GIA.
- GB4BR - BARRY RALLY: Barry Leisure Centre. Details G3WSU.
- 9 MARCH:
- GB4RA - RED ROSE AWARD: Bolton. Details G0FRL.
- 10 MARCH:
- GB0HSC - MERSEYSIDE: Details G6HMO.
- 11 MARCH:
- GB50AP - SOAP: Unilever House, London EC49. Details G4SY1.
- 13 MARCH:
- GB2ESS - EAST SUSSEX SCOUTS: Beacon Hill School, Crawborough. Details G4YJK.
- 17 MARCH:
- GB5RN - ROYAL NAVY: HMS Bolfest, London SE1. Details G3H2L.
- 18 MARCH:
- GB0LBL - LEVER BROTHERS LTD: Gladstone Hall, Port Sunlight. Details G4EFP.
- 19 MARCH:
- GB8PX - PREFIX: Annan, Dumfries & Galloway. Details G4MNNC.
- 20 MARCH:
- GB0GGC - CARLETON COMMUNITY CENTRE: Pontefract. Details G0AAO.

- 23 MARCH:
- GB5CO - COLONSAY: Isle of Colonsay, Argyll. Details G40BK.
- 25 MARCH:
- GB1HW/GB4HW - HAGRIANS WALL: Vellum Lodge Hotel, Bardon Hill, Haxham, Northumberland. Details G4UOE.
- 30 MARCH:
- GB4HEB - MIDLANDS ELECTRICITY BOARD: Helesowen, Birmingham. Details G00JA.
- 31 MARCH:
- GB4BBR - BUGGS BIRTHDAY RALLY: Sandford-on-Thames, nr Oxford. Details G4UKA.
- 1 APRIL:
- GB0RFC - ROYAL FLYING CORPS: Whitby, North Yorks. Details G3DAY.
- GB10VA - OSCAR VICTOR ACTIVATED: Stretch of coastline nr Ravenscar, North Yorks. Details G1SCB.
- GB2EG - EISTEDDFOD CASNEWYDD: Fairwater, Gwynedd. Details G40BNP.
- GB2HWS - MACCLESFIELD WIRELESS SOCIETY: Details G0AMU.
- GB2RFG - ROYAL FLYING CORPS: Marake-by-the-Sea, Cleveland. Details G0BIA.
- GB4RF - ROYAL FLYING CORPS: North Shields, Lynn & Waver. Details G4PUI.
- GB6RF - ROYAL FLYING CORPS: Peterlee, Co.Durham. Details G1WOU.
- 2 APRIL:
- GB4CMT - COMINGUOUS MODULATE TONE: Grindale Parachute Centre, nr Bridlington. Details G4CMT.
- GB4SDC - ST DUNSTONS COLLEGE: Sidcup, Kent. Details G40HX.
- GB4SG - SAINT GEORGE: Lancing, W.Sussex. Details G3LOI.
- 4 APRIL:
- GB0C0X - COASTAL DEFENCE "X": Golden Hill Fort, Freshwater, IOW. Details G3RJUK.
- 5 APRIL:
- GB2WFG - WALSALL FOOTBALL CENTENARY: The Saddlers Club, Walsall. Details G4FAJ.
- 7 APRIL:
- GB4RRS - RED ROSE SILVER: Bolton. Details G0FRL.

GB CALLS

The list below shows ALL the special event stations licensed for operation during February (as at press date)

It is taken direct from the GB Calls file on the HQ computer. These call signs are valid for use from the date given but the period of operation may vary from 1 to 28 days. There's now no need to send details direct to the editorial office.

NOTE: This list is taken from the Headquarters' database during the first week of the month prior to publication. If you have an event which is taking place during the latter part of the month of issue, you must send your form in to Headquarters at least 10 weeks in advance to ensure that it can be processed ready for the listing, otherwise it will miss the copy date.

(cont from p.203 col.3)

Council had noted that Mr R.R. Hatters, BRS90281, had recently alerted coast guards after picking up a distress call from a ship 700 miles off the coast of Ireland. It was agreed that this was a very meritorious action and the Society would be sending a certificate to Mr Watters in recognition of his actions.

Council considered a complaint which had been received regarding a letter sent by Mr D. Smith, G4DAX, during the Zone A election for the 1988 Council. After some discussion, the President said he felt that this might be regarded as healthy electioneering, although he added that it was unfortunate that a recommendation for a particular candidate had been included in the end of term report to clubs written on Mr Smith's Council Member stationery.

Under the heading of the role of the President, Sir Richard Davies expressed his gratitude to Mrs. Heathershaw, G4CHH, for her willingness to continue to take an active part in Society business, acting as his special adviser in

compliance with Council's wishes, during 1988. Sir Richard commented that he felt there was a need for a Steering Group to ease the process of decision-making for Council. He wished to take further advice on this matter.

Under the heading of Any Other Business, the President referred to a matter which had been raised by Arthur Milne, G2MI, at the recent Annual Meeting of the Society. (It is hoped that the Minutes of the Annual Meeting will be published in either the April or May issue of the Bulletin). The President referred to the fact that apparently another GB2RS newsreader had complained direct to the DTI about a fellow newsreader. Sir Richard Davies said that he considered this action to be extraordinary. At this point, Mr G. Smith, G4AJJ, identified himself as the complainant. In the ensuing discussion it was noted that the complaint referred to the introductory and closing paragraphs associated with the GB2RS news script which are inserted at the request of the Society and are not a licence requirement. Thus any abbreviation of these paragraphs necessary for the timing of the

broadcast were not a matter for the DTI. Mr Smith then offered to write a letter of apology to Mr Milne, which was accepted by the President.

Other matters discussed by Council included: the quality of the print used in the latest Call Book, insurance for EMC co-ordinators, the RSGB approved ARIS insurance scheme, the Student Licence, the 75th Anniversary celebrations, reduced and waived subscriptions and recent affiliations to the Society.

NB:

At the last meeting Dr J N Gannaway G3YGF, was appointed Executive Vice President for 1988.

Mr Basil O'Brien, G2AMV was also appointed as the Society's new Hon. Treasurer. He replaces Mr Cornish, G3COR, who resigned for health reasons. The casual vacancy created by this appointment will be discussed at the next meeting.

Mr Frank Hall, GM8BZX, was unanimously appointed by Council at the same meeting to fill the casual vacancy for a member for Scotland.

NEWS AND VIEWS

HF

John Allaway, G3FKM*

IT IS UNDERSTOOD that the president of JARL has received a letter dated 19 December 1987 from CRSA president Qin Duxun, informing him that all Chinese broadcasting transmissions in the 7.0 to 7.1MHz band have ceased. Recent lists of intruders in the 7MHz band prepared by the IARU Monitoring System show an all-round reduction in the number of intruders — even of broadcasts from Albania. No doubt a result of the vigilance of the IARU observer team at the HF Broadcasting Conference early last year.

The problems with *Rad Com* production were still considerable at the time of writing, and once again readers may not receive their copy before my deadline. Rough guidance for the estimation of closing dates is to make them one day earlier than they were in 1987 — but this won't always happen!

Several kind readers have pointed out that John Hooper's former callsign was G3FJH, not G3FJK as given in the November column. Does anyone have an old *Callbook* showing John's name and address?

Expedition to Inner Hebrides

G4OBK and G0EJK, sponsored by the Central Lancashire ARC, are undertaking an expedition to Colonsay in the Inner Hebrides. This will take place from 23 to 30 March. The IOTA reference is EU08 and the WAB square NR39 Strathclyde. The callsign will be GB5CO, and activity will be cw and ssb on the usual expedition frequencies. The station will be a multi-operator entry in the CQWW WPX Contest. Antennas will be verticals and dipoles and there will be limited operation on 144MHz where 100W to a nine-element Yagi will be available.

To list...or not to list

The following item by John Devoldere, ON4UN, appeared in *Radiosporting* and was sent in by LA5HE/OZ8RO.

"In my search for skeds with new countries on top band I have been listening a lot on 20m. I have been amazed at the number of nets on that band. While the band sounds almost dead, there are a number of nets (a few between 14.175 and 14.190kHz) where some good dx is hanging around. Instead of each of them working dx stations by themselves and each on a different frequency (like the good days when dxing was a challenge), they sit there and wait until some net control brings them a QSO (?) on a silver platter. The net serves as a red carpet...Some of those net controls don't even allow you to make a proper QSO, and start relaying things (its good for their ego trips!) Ugh!

During a visit to the Far East last August, Bill, G4ZVB, looked up some of the local "celebrities" in Hong Kong. L to R: G4ZVB and xyl Sylvia; Drake, VS6EK; Bret, XX9TDM/VS6UP/KB7G; Tad Miller, 9M8EN, and Phil Weaver, VS6CT. VS6CT has taken his antennas down at his current QTH, hence his absence from the bands, but he will be back on hf when his new experiment has been completed, hopefully later this year. Photo: G4ZVB



"One night I was listening to a YU4 station on 80m working N America. At one time he was called by XE10H. He came back to him as W1...and gave him a 59 report. He commented on the strong signal and signed without having copied his call or anything even close to his call. When I broke in to give him the call, his comment was 'You are closer to XE, that's why you hear him better'. The point is that whether you are close or distant doesn't matter, but when it takes you several repeats to even get the call (or if you need a relay to get the call) a Q3 or Q4 at best is in order. One minute later a VE1 called him and he returned a W1 call with a 59 plus 20 report. When called by W7 in Arizona he didn't hear him. Next, AD3V called him. His reply was: 'What?' When he asked the W3 which antenna he was using and received a prompt answer, the reply was 'please repeat'. One second later the response from the YU was: 'You have a tremendous signal 20dB over S9, I thought you were my neighbour'. None of the information that the AD3 gave him was copied at the first try. Really funny... I guess that is one way of building up an image of being a 'good' dxer. Maybe it works with some of the newcomers. But it really is ridiculous."

DX news

In a news release on 9 December, the ARRL announced the addition of Aruba to the DXCC list. The new listing is now separate from the Netherlands Antilles and by virtue of Point 1 (Government) of the Country Criteria. Credit will be given for contacts on or after 1 January 1986. The release says that cards for P4 credit should not be submitted before 1 April 1988, and that before Aruba credit can be given to those who already have credit for the Netherlands Antilles, a Netherlands Antilles card must be resubmitted. Therefore, along with the creditable Aruba card, please also resubmit any card confirming contact with Curacao or Bonaire, or an Aruba card for a QSO on 31 December 1985 or earlier.

The "International DX Spot 88" will take place at the Solli Tourist Centre at Geilo, in south-central Norway, on 4 and 5 June. The programme will include talks by ON4UN on low-band dxing, propagation forecasting, dx antennas and their construction, tips and hints for dxers, and a dx panel. Lodging is available in cabins, apartments and hotels. It is organised by the LA-DX Group, and more information will be available later.

In his *DX Report* dated 28 December, Jim Smith, VK9NS, said that he had received a letter of "agreement in principle" to his joint venture to Baker and Howland Is which should take place this month. It will be a joint exercise between the HIDXA and the US Department of the Interior Fish and Wildlife Service. A recent call to the shipping company had shown everything to be in order. Licensing was in hand. Probably Howland Is will be the island used, but there could be a three-day side-trip to Baker Is which will be of interest to those working on the IOTA Award. A number of operators are expected to be on the expedition.

The operation by C9MKT seems to have been legal, and QSLs will be accepted for DXCC purposes. Ron had authority to operate from 23 November to 6 December. SM7DZZ — who operated as 8Q7CH — was to be in Mozambique during February, and is believed to know the Minister who issued the C9MKT licence.

Steve, WA4UAZ (who has also been CR9G, F6IKV, GMSAXO, WA4UAZ/HCI, HD1A, KZ5BP and VS6DR) is currently in Morocco and active as CN8FC. He is expected to be on all bands 1.8 to 28MHz. *DX News Sheet* reports FD1MXQ/TT8 active with the hope of acquiring a full TT8 callsign soon.

*10 Knightlow Road, Birmingham B17 8QB.



Tony Weltham, HS1AMH/G4UAV, calling in to SEANET from HS0B, the club station in Bangkok. At present only two stations, HS0A and HS0B, are authorised to operate from Thailand, though the situation could change in the future. Station equipment is a TS930S and TH6 beam. Photo: G4ZVB

JEIMAS is on Zanzibar for a year, and on the air as 5H11IK. *DX NL* raises the interesting point that perhaps both Zanzibar and Tanganyika should have been deleted from the DXCC list in 1974 and replaced with a new entry from that date, ie Tanzania. This would seem to be logical, as this is what happened to Papua Territory and New Guinea when they merged to become Papua New Guinea! 4Z4MS had been in Ghena for a while but has been unable to obtain operating permission — the situation in that country does not seem very favourable to amateur radio.

FH5EF (formerly TL8RC) is in Mayotte for two years, and some activity by FR0EH/J took place early in 1988, but nothing is known about him at the time of writing. FT8XC is believed to be restricted to operating above 7,050kHz on 7MHz and above 14,050kHz on 14MHz.

Special call signs will be in use in S Korea during the Olympic Games. HL8A, HL8N and HL8V will be special stations on from the Olympic village and hall. HL8N will also use 6K88SOG; HL8V, 6K88KOG; and HL8A, 6K88A actually during the games. Other Korean amateurs may use 88 in their prefixes. *DX News Sheet* says that rumours of an expedition by UA9QBA to Vietnam seem to be quite strong and that USSR stations are already even discussing likely 3.5MHz frequencies. This is being written in mid-January, and hopefully much more will be known by the time this is being read, but the idea seems a little optimistic to me.

One of the column's regular contributors — Chris Baker, G4LDS, is in Salalah in the Sultanate of Oman. Unfortunately there is no arrangement for reciprocal licences between our two countries at present, and he is limited therefore to using the club station A4XCB which is active on 3.5 to 28MHz using a TS830 and FL2100B and also an FT101E with T113 and W3DZZ antennas. The 28MHz band has been open and many cw signals heard, so Chris asks people to listen for A4. At the time of writing, the station was on 21MHz from 1100 to 1200, when it moved to 14MHz. There will be special activity on 3.5 and 7MHz, particularly after 1600 on Saturdays, and schedules can be arranged direct with Chris at PO Box 18530, Salalah, in via his brother G4DJC (see "QTH Corner").

DL1VU was scheduled to leave Frankfurt on 3 January for a wide-ranging Pacific expedition. He was due to pick up a linear in Guam before going to Saipan where he may be KH0/DL1VU, and obtain KC6 licences. Then he goes to KX6 and Nauru (but no activity from the latter). From here he goes to Fiji, 3D2VU and Tuvalu (?T22VU) where he spends up to four weeks. Then back to Fiji where he will try to organise a boat trip to either KH1, T31 or KH5, returning to 3D before going to H44VU, 5W, ZK1XG, FO0VU, 5W, 3D again, C21, KC6(E), KC6(W), DU, A9 and home! Quite a trip, and it is expected to last about four months. Frequencies to watch are 1,825–1,830, 3,500–3,510, 7,000–7,010, 10,105, 14,027 18,073, 21,027 24,900 and 28,027kHz.

ZL3ASH is on Penryhn Is in the N Cook group for two years as ZK1WL. He uses cw and ssh on all bands. The VK9NS *DX Report* says that Rob, VK9ZR, is now active from Willis Is for a six-month stint. Unfortunately he does not use cw but tends to check into the 14,220kHz or RF0FWW nets almost daily, something which should cause a lot of hair to be torn. *Long Skip* mentions a possibility that Joe, VE3CPU, may try to operate from Palmyra Is (KH5) this year. Transport is available on a large sailing vessel, and more operators are sought. Dates are not finalised but it is expected to be a two or three-week trip.

The station on the air from the Council of Europe in Strasbourg from 11 to 13 March and again from 24 to 26 June will use the call sign TP0CE.

Much confusion was caused recently by CR9BZ, who had a very loud signal. Obviously many didn't know that he was in Madeira rather than Macao. Madeira uses CO3, CO9, CR3, CR9, CS3, CS9, CT3 and CT9. The Azores Is use CU1 to CU0 inclusive, and mainland Portuguese stations use the CQ, CR, CS and CT prefixes with 1,2,4,5,6,7,8 and 0 as the numeral.

The High Speed Club

The HSC was founded in 1951 as a community of like-minded operators within DARC. Today there are members in more than 50 countries in all continents. It is a member of the European CW Association (EUCW) and co-operates with other telegraphy clubs. The club station DL0HSC transmits the "HSC Bulletin" every first Saturday in each month at 1500 on 7,025kHz in English and on about 3,555kHz at 2100 in German. There are two HSC contests each year, and the club also issues two awards (which are also available to listeners).

Club members tend to use 25kHz up from lower band edges (plus 3,570kHz) and anyone wishing to become a member should try to work as many members as possible at the same time operating at not less than 25wpm or higher. If possible use full break-in. Keyboards, decoders and computers are not allowed! After a few QSOs ask a member to send his recommendation to you. Note that only contacts lasting at least 30min will be accepted. After collecting five recommendations send them with eight 1rcs to: The Secretary, DL1PM, Ansgarstr 14, D-2105 Seevetal 11, FR Germany.

HSC wishes to dissociate itself from "HSC cv" which is a registered society founded in late 1979 and which has no connection whatsoever with the original HSC.

Awards

The Z2 Award

This new award is available from the Zimbabwe Amateur Radio Society to those who have made contacts with the necessary number of Z2 stations on or after 1 January 1987. Zimbabwe stations need 15, stations in CQ zone 38 need 10, and all others five. Any bands or modes may be used and applicants should send certified log details of their contacts, plus US\$ 1 or 10 1rcs to Z2 Award, PO Box 2377, Harare, Zimbabwe.

The Calvados Award

This is being issued by the REF regional club of the Department of Calvados in Normandy. Applicants must have worked (or heard) 10 stations located in the Calvados district (No 14) on any band or mode. Special endorsements are available for hf, vhf, sht and cw, tty etc on request. Missing stations up to two may be substituted with one QSO with the club station FF6KCZ (hl)/FF1KCZ (vht). Send log details, certified by two other amateurs, plus 10 1rcs, to Pierre Roger, F1CNU, 8 Rue des Petites Haies, F-14440 Douvres La Delivrande, France.

Den Helder 200 Years Naval Port Award

Den Helder celebrates its 200th anniversary as a naval port this year, and this award is available to both licensed amateurs and listeners. QSOs must take place during 1988 with stations in Den Helder. Europeans need two club or special station contacts plus four others, and each may only be counted once. Send certified log extract (signed by two other amateurs) plus eight 1rcs or £2 to: MARAC Activity Manager, PO BOX 2025, BB Den Helder, Netherlands. Special stations which will be active include P14s ADH, DHV and MRC, P15s KOM and DD, P11ZH and P11ARS, and P19ZKD.

RAFARS Golden Jubilee Award 1988-1989

To celebrate the Golden Jubilee of the foundation, on 1 April 1938, of the Royal Air Force Amateur Radio Society (RAFARS), the society takes pleasure in inviting all radio amateurs and swls to apply for the Golden Jubilee Award for contacts made (or for listener reports confirmed) with members of the society between 1 April 1988 and 31 March 1989.

WORKED ALL CONTINENTS AWARD

The Worked All Continents Award is an IARU award, but obtainable in the UK via the RSGB. Confirmed contacts are required with each of the six continents: Europe, North America, South America, Africa, Asia and Oceania.

Applications should be made to the RSGB hf awards manager, who will verify the claim and forward it to the IARU headquarters in the USA. Please enclose a self-addressed stamped envelope for return of the cards, together with proof of RSGB membership. There is no other charge for the award. Various endorsements, including "All 1.8MHz", are available. Both a five-band and six-band WAC may also be claimed, but in this case contacts made before 1 January 1952 do not count. For all WAC awards, contacts must be made from the same location, defined as an area not exceeding 25 miles (40km) in diameter.

The WAC awards are also available to swls on a heard basis.

For full details of the scoring scheme, together with special log sheets, please send a large sase to the awards manager: Tony Gilchrist, G8BVJ, 6 Mansion Hill, Hallon, Aylesbury, Bucks HP22 5NL.

Contests

Bermuda Contest

0001 19 March to 2400 20 March

1988 is the 30th anniversary of this event, which has the biggest reward for the winner of any contest I have been aware of.

All stations must be single-operator only and may only operate for a maximum of 36h in total. Off-air periods must be clearly marked in the log, and each of these must be for a minimum of three consecutive hours. All entrants must operate from their own private residence or property. Top winners of the 1983, 1984, 1985, 1986 and 1987 contests shall be eligible for area awards only. The contest covers 3-5.7, 14.21 and 28MHz cw and phone, but no cross-band or cross-mode contacts are allowed. Exchange RS/T, and, in addition to this, Cenedian stations will indicate their province, USA stations their state, FR German stations their DOK, and UK stations their county. Bermuda stations will give their parish. UK stations may only exchange reports with Canadian, USA and Bermudian stations. Each completed OSO counts five points, and a phone contact and a cw contact with the same station on the same band counts only if the contacts are made at least 30min apart. The multiplier is the total number of Bermuda stations worked on all bands—the same VP9 can be worked on all bands. All log times must be in gmt (utc) and a separate sheet used for each band. Dupe sheets must be enclosed for any band on which more than 200 OSOs have been made. Each log sheet must be clearly marked with the contestant's call sign, band and date, and all contestants must enclose a signed statement that they have observed the rules of the contest and the terms of their licence. A penalty of three points will be deducted for each unmarked duplicate, and excess duplicates can result in disqualification. All logs must be received by the Contest Committee, Radio Society of Bermuda, PO Box HM275 Hamilton MH AX, Bermuda, not later than 1100gmt on 1 June 1988. Overseas entries should be sent by airmail; if you wish for an acknowledgement of receipt please enclose ircs and sase. The top scorer in each province, state, county, DOK and parish, will receive a printed certificate provided that at least 100 OSOs have been made. Overall winners in the USA, UK, Bermuda and the FR Germany will also receive a trophy which will be presented at the RSB's annual banquet during Radio Week (16-22 October 1988) and round-trip air transport and accommodation will be provided.

Results of the 1987 CQ 160 Meter CW and Phone DX Contests have appeared in CQ magazine. UK scores are as follows:

CW SECTION. SINGLE-OPERATOR			
G4OBK	—	152,145	points
G4VGO	—	124,800	..
G4BYG/A	—	100,978	..
G4BBV	—	45,068	..
GM3RAO	—	23,347	..
G3ESF	—	20,400	points
G3SJS	—	17,252	..
G3TFF	—	3,048	..
G4BWP	—	2,684	..

In the multi-operator section GM3IGW scored 161,184 points and G3FVA 78,642.

In the Phone Contest the only UK entrant was GW4IOI who scored 45,193 points. (Certificate winners are listed in bold type).

CQ WW WPX Contests

0000 26 March – 2400 27 March (SSB)

0000 28 May – 2400 29 May (CW)

1-8 to 28MHz (excluding WARC bands). OSOs with own continent count two points on 14.21 and 28MHz, and four on 1-8, 3-5 and 7MHz. With other continents they count three and six respectively. Own country may only be worked for multiplier credit but not for points. The multiplier is the total number of different prefixes worked – each counts once only even if worked on more than one band. Exchanges consist of RS/T plus serial number (from 001). There are single-operator single- and multi-band and multi-operator multi-band single-transmitter categories. The last mentioned must have one transmitter only and remain on a band for at least 10min at a time before OS'ing. There is a QRP section for stations running no more than 5W output, and entries in this class must be clearly marked "QRP". Single-operator entrants may only operate for a maximum of 30h, and may take up to five rest periods which must be clearly marked in the log. To be eligible for an award single-operator entrants must operate for a minimum of 12h and multi-operators 24h. The final score is the total of OSO points times the number of different prefixes worked. Logs must show date, time, station worked, numbers sent and received, if new prefix, and points claimed. A prefix check list must be included. Entries for the ssb event must be addressed to: CQ Magazine, WPX Contest, 76 N Broadway, Hicksville, NY, 11801, USA, and postmarked no later than 7 May 1988. Official log and summary sheets are most useful and are available from CQ – copies of the official rules are available from me (sase please).

SP DX Contest

1500 2 April to 2400 3 April

This year this contest is phone only, 1-8 to 28MHz. Exchanges consist of RS and serial number (from 001). Polish stations will also send two letters to indicate their province. Each OSO counts three points, and the multiplier is the number of different provinces ("powiaty") worked – each counts once only. There are single-operator single- and multi-band, multi-operator multi-band, and listener sections. Mail logs before 30 April to: PZK, SP DX Contest Committee, PO Box 320, 00-950 Warsaw, Poland.

UBA Spring Contest

0700-1100 1 March (3-5/7MHz ssb)

0700-1100 15 March (3-5/7MHz cw)

This is organised by the DST section of UBA. Photocopies of rules are available from me. (NB: there is also a vhf section on 5 April.)

Welcome...

... to the following new members: DA4TL, EI4DI, EI7EH, EL8K, KD5M, K0VV, N4AR, PA0XSA, V8SHUW, WA0S, YO3DIU, and listener members J Vedin (SM), G Zadeh Esmaci (EP), and Ari Kekki (OH).

FINAL 1987 28MHz COUNTRIES TABLE

G3VOF.....163	G0AEV.....105	G4RWP.....39
G4JBR.....162	GD4XTT.....102	G4IDF.....36
G4XAH.....151	G4NXG/M.....93	G0BXO.....35
G4VPM.....147	G0HOF.....91	GM4CHX.....46
G3XOU.....130	G0AGP.....88	GW4TEJ.....27
G4MUW.....114	G4DXW.....78	G4IDF.....25
G4OBK.....109	G0FYD.....76	G5HD.....10(ORP cw)
G0ELY.....108	G4OTU.....69	G4YWG.....9
G0DNV.....108		

1988 28MHz COUNTRIES TABLE

G4JBR	50
G4MUW	32 (ssb)

10MHz COUNTRIES TABLE

All-time	1988
G3PJT	101
G4VDX	71
G4YWG	64
G4OBK	57
G4YSN	1

1987 ALL-BAND TABLE No 6

Call sign	1-8	3-5	7	14	21	28	Total
G4OBK	49	100	112	134	112	109	616
G4ODV	44	77	145	101	107	77	551
GW4RHW	30	58	69	205	114	38	512
G4OTU	35	38	70	128	115	69	453
GM3YOR	44	55	108	81	52	32	352
G3TFF	36	41	74	140	39	18	348
G0FYD	1	29	71	68	65	76	310
4X4FL	—	10	37	53	84	63	247
G4GOF	7	17	20	54	10	2	110
G0HGA	—	21	8	22	25	—	74

(Next deadline — for the first 1988 table — scores to reach G3GIG by 8 March please)

TABLE SERIAL No 23

ALL TIME TABLE WITH DELETIONS NO 15

Call sign	1-8	3-5	7	14	21	28	Total
G3KMA	125	240	308	333	334	318	1,658
G3GIO	71	209	261	337	333	312	1,523
G3MCS	64	212	263	323	324	306	1,492
G3XTT	156	204	245	292	283	251	1,431
G4DYO	66	188	233	313	305	287	1,390
G3UML	31	220	234	334	298	255	1,372
G2DMR	59	184	204	314	313	289	1,343
G4GIR	96	201	237	294	283	253	1,334
G4BWP	100	214	238	283	246	247	1,328
GW3AHN	15	109	114	384	359	330	1,292
G4FAM	63	180	238	288	268	242	1,259
G3XOU	50	178	194	297	273	244	1,234
VK9NS	80	184	228	290	243	192	1,215
G4LJF	28	198	205	267	235	198	1,131
G3TFF	82	163	183	260	252	211	1,131
G3NOF	4	85	82	343	324	278	1,118
G3YMC	80	107	172	240	244	189	1,032
GW0FO	52	225	199	217	190	138	1,021
G4OBK	119	138	182	231	191	163	1,001
GM3YOR	75	137	183	221	199	181	996
GM3PPE	59	143	158	189	175	141	865
Average	69	177	207	286	269	238	1,246

(Next deadline: for the current all-time listing — please send scores to reach G3GIO by 8 April.)

Ex-G Radio Club

Several changes took place in the management of the club as and from 1 January 1988. Don Rayner, W3CTR, has resigned as hon secretary/treasurer on account of his wife's illness, and the task has been taken over by Ernie Poole, WA8TGA (5835 Miranda Drive, Fort Wayne, Ind, 46835). Frank, G2FUX, has also given up the position of hon UK secretary, and has been succeeded by Ken Haswell, GM2CWL (6 Camron Av, Ballock-by-Inverness IV1 2JT). Both Don and Frank deserve thanks for their long and devoted service to the club.

Band reports

Near normal service has now been resumed and the G8KG report is back in its usual place. It reads as follows: "November was the first month of the new cycle to have a monthly mean solar flux above 100sfu but subsequently, as cautiously predicted earlier, the rise in solar activity slowed down somewhat. As a result conditions on the higher bands during December and the first half of January were somewhat disappointing though there were some good days.

"After taking account of the October to December sunspot figures, NOAA Boulder have up-rated their forecast for the peak, now predicting a most probable value of 174 in December 1989, higher than the Cycle 21 peak, but the margin of error remains large, the 90 per cent probability range being 92-256. Put another way, this forecasts that there is an even chance of a peak of 174 or more—but by next December the prediction should be much nearer to the final outcome. Note that in the meantime SIDC Brussels continues to forecast a low peak in the region of 70-100."

The following have very kindly supplied information for this month's column: G2HKU, G5JL, GM3CSM, G3s GVV, IGW, KSH, LDK.

QTH CORNER

EP2RA PO Box 13185-276 Tehran, Iran. (Do not mention amateur radio on envelope.)
 GB5CO G40OK, "Sundale", Guckholes Lane, Higher Wheelton, Chorley PR6 6JL.
 J20YD F6FYD, 17 Ras Du Nouveau Parc, F-78570 Andresy, France.
 J50AS via Salvatore Aleccio, IT9AZS, via G. La Masa No 65, 90019 Trabia (PA), Italy.
 J56AS Dr J E Smith, 8 Heathcote Place, Gursley, Hants SO21 2LH.
 VK9AO G4UKG, 16 Bafeville Drive, Grestwood Park Estate, Nottingham NG5 5PG.
 VK9ZR GW8VHJ, R Woolley, 7 Old Rd, Raglan, Port Talbot, W Glam SA12 8TR.
 VP8OPZ SARL, PO Box 2327, Johannesburg 2000, Rep of S Africa.
 ZS21RSA P Zamboli, 18VGG, Via Trieste 30, I-84015 Nocera Super, Italy.
 3X0A JH4RHF, Junichi Tanaka, 1-4-6 Kotobuki, Hattoni, Toyonaka, Osaka 561, Japan.
 5H1JK Box 287, Entebbe, Uganda.
 5X5GK Chris Pedder, Thorncliffe, 5 Royalty Lane, New Longton, Preston PR4 4JO.
 8PSEM Yasme Foundation, PO Box 2025, Castro Valley, Cal, 94546, USA.
 9N5OL JA8RUZ, Toshikazu Kawashiri, PO Box 166, Asahikawa, Hokkaido, 070-91, Japan.
 9N7YDY

10MHz 0800 JA1IFP, 0900 N5VV, VK2.3.7, W4.0, ZL2.3. 1200 TA1D, 1500 C31LB, PY7LO, 1600 W6OV, 2100 W1.3, J6LAD/9YA.
 14MHz 0700 BY4SZJL, WH6BLQ/KH3, 0800 BY1PK, FK8FF, H44JA, JA, KC6s IN, SL, NY6M/KH2, VE7, VK2.3 ZL1.2.3, 3C1MB, 0900 BV2FA, BY4AA, KH0AC, N2PC/KX6, PY0FNI, VK9AD, VS6DO, 3C3CIM, 1000 BY4RB, KL7PJ, 8P9EM, 1100 HC2SL, KL7IG, LUGXA, VK9ZR, VU2XX, 9N5OL, 9N7YDY, DF5UG/47, 1500 FT5ZB, 1600 T5GG, T19M, VE6.7, VK9YE, W6.7, 1700 S79DW, V31PC, 1800 C9MKT, FROEH, JY5DL, VE8CDX, ZD9CS, 1900 CE9AT, J50AS, N6IV/KL7, V2AZL, VKs 2AVA, 9NS, VP8JC, ZD7AF, 9Q5NC, 2000 J20YD, VP8AEF, 2100 FROEH, TR8CA, W6, 2200 CE, HR, J, TR8JLD, VP8ML, ZD7BJ, 2300 CX0CY, FYSEM, VK6RP, T19M, ZD7XY.
 18MHz 1400 VE3JPW, 4N3KV, 1500 KP2J, N5VV, VE2.3.
 21MHz 0800 BY5QA, JA, PA3AXU/SU, VK, ZL, 905DA, 0900 C53EE, FY7AN, J20YD, VK9YV, XX9WW, 1000 FM4DN, VK9YD, VS6UO, VU2TJW, Y11BGD, ZL2AAJ, ZL3VP/4, 1100 FR5DX, VP8BPZ, 9N1RN, 1200 H21AB, S79WS, VP2MU, 8P9GP, 905DA, 1300 FP5HL, FT5ZB, TA2L, VP5SL, 9M6DA, 1400 Z1JJP, VP2EZ, VK3XN, W5, 0, 5H3BH, 1500 CE0FFD, ZF2LQ, 5L7Q, 1600 J50AS, WW6F/VPS, W6, ZD9BV, 1700 FH8CB, HH7PV, PY0FNI, VE6-VE7, W6-W7.
 28MHz 0800 JH1AJT, 0900 BV2FA, FT5ZB, TA, T26VV, VK6RO, 9V1WW, 1000 FR5ZN, J28EO, TR8JLD, VK6HQ, VU, 3B8FU, 1100 A22BW, VP2EZ, Y10BF, 5H1HK, 5X5GK, 9Q5NW, 1200 G13VJCT/3, TA2AO, VK6ABQ, DF2ALP/ZS3, 1300 FY4OE, KP2J, PJ6/WA3ZBI, T18CBT, VP2MU, Y11BGD, 1400 FM4DN, HK0HEU, JY9LC, KP2AH, Q9AK, VP8ADE, 3D6CA, 6W8JX, 6W7OG, 1500 CE, HC, J87CD, T1, TJ1CH, V1, VP2ED, W4, 1600 FH8CB, FY5BB, OD5GZ/LU, VP8s BKK, BPZ, 1700 FY4EE, TU2QQ, W1-W4, W8, 5N3BHF, 1800 W1-4, W8, 2000 A22FN.

Acknowledgements and thanks to the following for information extracted: *CQ Magazine* (W1WY), *DXNL* (DL3RK), *Long Island DX Bulletin* (W2LYX), *DX News Sheet* (G4DYO), the *EX G Radio Club Bulletin* (G13OEN/W6), *Long Skip* (VE3IPR), *Lynx DX Group Bulletin* (EA2JGO), *DX Family Newsletter*, *DX Report* (VK9NS), and *DXpress* (PA3CXC).

Closing date for May is 15 March.

□

HF F-layer propagation for March 1988

The time is presented vertically at two-hour intervals 00(00)gmt for each band, ie 00=0000, 02=0200, 04=0400 etc.

The probability of signals being heard is given on a 0 (indicated by a dot) to 9 scale; the higher the number the greater the probability with 1 meaning 10 to 19 per cent of days, and so on. Additionally 50MHz F-layer end and 1.8MHz openings are indicated by a plus (+) sign in the 28 and 3.5MHz columns respectively.

Time / GMT	20MHz	24MHz	21MHz	18MHz	14MHz	10MHz	7MHz	3.5MHz
	000001111122 024680246802	000001111122 024680246802	000001111122 024680246802	000001111122 024680246802	000001111122 024680246802	000001111122 024680246802	000001111122 024680246802	000001111122 024680246802
** EUROPE								
MOBON11.....12232.....355651.....1677773.....37777882.....	312653556874	875322223600	+53.....3+
MALTA111.....123321.....466663.....17778861.....37778951.....	353755556894	998532224689	+2.....3+
GIBRALTAR111.....1111.....134343.....3666661.....7877895.....	231576556895	87775334689	+42.....3+
ICELAND111.....1111.....134343.....3666661.....1577773.....56667883.....	663533346870	+42.....3+
** ASIA								
OSAKA1.....1.....231.....452.....2654221.....132123341.....1.....1462.....3.....
HONGKONG11.....2331.....14563.....2666521.....1454555.....12124652.....1.....1475.....42.....
BANGKOK1222.....34441.....256673.....2576732.....12545671.....	2.....2124764.....	2.....1477.....44.....
BINDAPORE2223.....134452.....2576731.....3576733.....12545671.....	2.....2124763.....	2.....1477.....44.....
NEW DELHI2223.....14445.....256771.....356674.....22345621.....	411.....2124766.....	62.....1478.....	3.....4+
TEHRAN33331.....15563.....4667761.....3556735.....	1.1423456721	7441.....12477.....	852.....1478.....	3.....4+
COLOMBO33331.....14563.....3567762.....3456774.....112456832.....	42.....12478.....	61.....1478.....	3.....4+
BAHRAIN34441.....156663.....4667761.....3556783.....	8531.....114780.....	861.....1478.....	3.....4.....4.....
CYPRUS44443.....1666752.....4688885.....6888887.....	312766667964	876433337999	8832.....112580	+2.....25+
ADEN43533.....1666761.....4667884.....34537872.....	411311246863	9641.....13789.....	8752.....1478.....	+4.....4+
** OCEANIA								
BUVA/B1.....1.....12.....23411.....2444451.....23212362.....31.....13.....13.....
BUVA/L1.....1.....41.....	11.1631, 261	11.146432165223321362.....21.....13.....13.....
WELLINGTON/B1.....1.....2321.....244431.....1554454.....43212362.....21.....141.....141.....
WELLINGTON/L1.....1.....1.....	1.3.....41	122232.....253	12432.....153121.....131.....131.....
SYDNEY/B11.....2311.....156432.....3775542.....4654566.....232124741.....1.....143.....143.....
SYDNEY/L11.....2311.....1.....37.....31	1.1.641.....63142111352.....1.....33.....33.....
PERTN332.....15551.....377751.....4776532.....	1.24544651	2.....12124795	1.....1475.....1475.....
NOULULU332.....15551.....377751.....4776532.....11.....352.....1221133.....141.....11.....11.....
** AFRICA								
BEYCNELLES24553.....1457761.....3567884.....44667872.....	421211346863	962.....13789.....	85.....1478.....	+2.....4+
MAURITIUS45564.....1677762.....3667885.....	1.445678831	521212346875	962.....113689.....	84.....1478.....	+.....4+
NAIROBI456651.....1667873.....36688861.....	1.544478841	631411146886	9841.....13689.....	883.....1478.....	+5.....45
HARARE467762.....577885.....26668883.....	21.454478952	651521146897	9952.....13689.....	884.....1478.....	+.....4+
CAPTOWN347874.....5688861.....177789841	1.365568973	631532236898	98541.....13689.....	8851.....1478.....	+2.....4+
LAGOS467775.....6788871.....76678951	22.275457973	771552125098	99762.....2689.....	7883.....378.....	5+5.....4+
ASCENSION 1s2533651.....4755772.....7765785.....	12.....86445882	573263112697	99863.....378.....	88841.....168.....	5+5.....3+
OKARA1566651.....3777772.....6766785.....	1.76556882	464264225697	99863.....379.....	88841.....158.....	+.....2+
LAB PALMAS34343.....2666661.....3688884.....78888971	242366666895	998754334689	99863111379	+53.....4+
** S. AMERICA								
Bth BHETLAND35651.....1677772.....377885.....	1.15667772	464245345565	788632112235	57841.....13.....	245.....
FALKLAND 1s166651.....277772.....577885.....	1.26666772	45425533466	99864211136	78841.....13.....	+52.....
R OE JANEIRO442351.....664572.....875675.....	1.7644672	354135311366	998532.....48	88841.....16.....	+52.....3
BUNOS AIRES155551.....376662.....677675.....17655661	353145422355	9985421.....26	78841.....3.....	+5+2.....
LINA3233.....54452.....76564.....654441	122.21431124	6873421.....3	68841.....1.....	3+2+2.....
BODOTA2223.....43451.....65554.....655441	111.13421134	6873321.....4	68841.....1.....	+52.....
** N. AMERICA								
SARBOBER2233.....154452.....475565.....6654561	121.15422255	7773321.....26	88741.....4.....	+52.....
JAMAICA1112.....33341.....55553.....655541	11.12632234	6652321.....4	88841.....1.....	3+52.....
BERMUDA1112.....33341.....155564.....2655661	11.....4432355	6652221.....25	78841.....3.....	4+2+2.....
NEW YORK11.....12231.....34453.....465551	1.....2443355	55311211124	68741.....2.....	3+52.....
MEXICO11.....222.....4442.....16543.....1.343222	343131111.....	1.27741.....	452.....
MONTREAL11.....222.....4442.....45534.....2443453	55211211124	68741.....2.....	3+52.....
DENVER11.....222.....221.....2442.....35322	331.1.112.....	2.6631.....	352.....
OS ANGELES11.....221.....221.....442.....25321	221.1.131.....	14631.....	52.....
ANCQUVER11.....221.....221.....111.....3431	12.1.13211	13431.....	42.....
AIRBANKS11.....221.....221.....111.....11232.....	11.121113431	11241.....111.....

The provisional mean sunspot number for December 1987, issued by the Sunspot Index Data Centre, Brussels, was 26.5. The maximum daily sunspot number was 43 on 18, 31 December and the minimum was 10 on 24 December. The predicted smoothed sunspot numbers for March, April, May and June are respectively: (classical method) 36, 37, 37 and 38, (SIDC adjusted values) 42, 44, 45 and 46.

VHF/UHF

Ken Willis, G8VR*

IN HIS POPULAR *Technical Topics* feature in the December issue, Pat Hawker obviously felt that the time had come, having been the mainstay of our journal for some 30 years, to wax philosophical on the subject of what is or should be expected of the writers of regular columns, commenting that in his opinion they should "neither expect to nor attempt to please everybody all of the time".

Any writer worth his salt seeks to provide what the majority of his readership wants to read. However, in a hobby as diverse as ours, the generic title of vhf operator conceals such a variety of activities as between one amateur and another that they amount almost to separate hobbies, and often the only link between them is the use of a vhf/uhf communication path.

If you live in a tower block with no antenna facilities, it will bring little comfort to learn that G7XYZ, from his country location where his antenna tower supports 8x17-element Yagis, has worked Japan "off the moon" on 432MHz yet again. If what turns you on is weak-signal tropo, those "dreadful" fm operators who seem only to maintain their licences to rag-chew in local nets will be (to you) just creators of QRM and a waste of good spectrum space. Similarly the fm operators might be forgiven for wondering why part of their territory has been given over to things like beacons ("which you can never hear anyway"). The list is quite a long one: repeaters, meteor scatter, rtty, fax, packet radio etc - all activities pursued by vhf/uhf operators, yet their calls may seldom be heard on the air if their choice is a branch of the hobby different from your own.

When writing this column I try to mention individual correspondents by name and callsign whenever possible, especially when it helps to give a better picture of an event. For example, if something happens which is reported by amateurs in GJ and GM, the event was fairly widespread; whereas when 50 or more stations in Yorkshire work Yugoslavia by sporadic-E, the event itself is worth recording for reference purposes, but a full list of all who took part at both ends of the path may not tell us very much, and serve only to use up column space which is always at a premium.

Early vhf columns tended to include long lists of "who worked what", which was useful information at a time when vhf operators were few and their equipment largely home-brew. Some reporters still prefer this format (*Dibus* is one), but with modern gear and a far greater amateur population, contacts which were outstanding in the 'fifties and 'sixties are now commonplace. However, this is your feature, so if readers prefer such lists they can be provided, but I believe that a wider approach results in better and more interesting copy. As I see it, my job is to use the space available to report on the widest possible range of vhf/uhf interests, and at the same time to present news and views in a style that is readable, even when the particular topic is of only limited interest to an individual reader.

I have always regarded it as a privilege to be allowed to write a column which keeps me so closely in touch with vhf/uhf events, and through which I have gained so many close friends, even though many are known to me only through their correspondence. Which leads to another matter. Since this column depends entirely on readers' letters, should they ever stop coming I would have to choose my own theme each month, which could result in a more restricted and possibly unbalanced view of events in the world of vhf/uhf. Fortunately, in more than five years since I took over the column, I have never had to worry about what should be included, but rather what has to be left out through lack of space.

Times are changing, however, and it is becoming more difficult to provide the service to readers to which I think they are entitled. Most of what you read in the regular columns was written some five weeks beforehand because magazines require this sort of lead-time for their preparation. Thus a sporadic-E event in July will not be reported on in *VHF/UHF* until September or even October, depending on how close to deadlines the event occurred. More recently, the *News Bulletin* has become a regular part of *Radio Communication*. Its pages are produced by a faster process than the rest of the journal, so that a report of an event could appear in it an issue earlier than it would in *News & Views*.

I suggest, therefore, that all *News & Views* columns in *Rad Com* should in future be produced by the faster process, and included in the

News Bulletin. It will no doubt be argued that one day RSGB will be so high-tech that copy will go straight from the author's own word-processor to the printed page, but until that happy day arrives, my suggestion would surely improve the situation. (It is, in fact, planned to do just that as soon as full desk-top publishing can be introduced - Ed).

Meteor scatter

The Geminids shower in December followed closely by the Quadrantids in January resulted in quite a lot of activity, and the meteor scatter mode seems to have lost its cloak of mystery and is being used more and more these days.

From radio reports it is not always easy to say when the peak of a shower occurred. Sometimes the time for the visual peak quoted in the astronomical journals shows quite clearly that the radiant will not favour radio amateurs in Europe at these times, yet we get reports of good ms contacts around these hours which give rise to individual estimates of the peak time, which may vary considerably. Since sporadic meteors are always around in some measure, the increased activity which always occurs during shower periods may account for many contacts being completed which are assumed to be "peak shower" QSOs, but which are, in fact, made via sporadic meteor trails. The following reports give some indication of the levels of activity and the conditions experienced in the two showers.

Geminids 12-14 December

50MHz

GJ4ICD: "The Geminids were very good, in fact quite spectacular. I was ORV on 12, 13 and 14 December both early am and late pm, and both periods proved to be fantastic. On 12 December at 2000gmt, many GM and GI stations calling "CO", signals very strong up to 30-40dB over 9, with bursts of +2min, with GM4DGT just like a local. 13 December was about the same, with signals from G18YDZ, GM4OGT every time the rig was switched on. Many GMs and GIs were worked. I was sorry not to have my 144MHz antennae up for this event."

GM4DGT: "On 13 December I had S7/8 ORM from a street lamp. Reflections were very strong but of short duration. I heard GJ4ICD, G8VR, G6XR, G1EWJ, G4JE and G3LEW, and managed a QSO with GJ4ICD for about 1 min. Worked G4JCC on sked with 26 reports both ways. On 14 December when the street lamp was off I worked GJ4ICD, G3IMW, G4XQZ, G4JE and heard G4UXC."

G18YDZ: "Was not ORV on Saturday, but on Sunday evening (13 December) copied very good signals from GJ4ICD and a few G stations, but only worked GJ4ICD. On 14 December I again worked GJ4ICD and heard G8VR, but then had to go ORT. The only other station worked was G4JE. All in all a poor shower this year. Not as much activity as in the Perseids."

144MHz

G3IMV: "I had made skeds with short/medium range stations like SM, DL, OK, HG etc, I think most of them would have been completed, and I would have thought it a good shower. But for skeds with stations at a QRB of 2,000km, the picture would be quite different. On 12 December at 0500 I tried with UV1AS (PT03A) and heard nothing. The only other sked that day was with HG5PT at 1900 which went through with no trouble. On 13 December I got some reflections in a sked with UA3IDQ (DQ) but I am not sure if they were from him! My next, with I5YOI at 1900, was terrible, only two or three short bursts. The final sked that day was with UC2OF (PM) and not a dicky bird. I did not stay up overnight so I don't know what happened, but I think that the shower probably peaked around 0400 on 14 December. I got the impression that the shower was poor since several people were bemoaning the fact on the vhf net."

G3NOH: "I made 16 skeds, all but three on cw. Four were completed, all on cw and with YUs. One complete contact with HG on random cw, and pings received from UR, UA and I. Missed completing with OE by the skin of my teeth, but was pleased with my first attempt at meteor scatter."

Quadrantids 3/4 January

50MHz

GM4DGT: "Worked GJ4ICD 1438-1449gmt and EI9FK on 70MHz at 1500 when both 70 and 50MHz were quiet. From 0100 on 4 January, was calling and getting loud but extremely short bursts. At 0900 tried with G3CCH and received only short bursts. It appears that the vertical angle of my beam is the critical factor. Tried a three-element on a pole with 30° elevation and worked GW3JXN/A and heard G3CCH plus stations calling on cw. The longer paths seem better with my beam." (More of this next month - G8VR).

G18YDZ: "Quadrantids a bit better than the last shower. Worked GJ4ICD at 1016gmt on 3 January, then late in the day, LA6QBA, LA9RAA, LA3EO, G4JE and G3LEW, the last three after midnight. On 4 January at 0920 worked G3ZSS, but activity very poor despite GB3NHQ beacon being good all day."

GJ4ICD: "I found that the best time was 1300gmt on 3 January. Stayed awake until 0300 on 4 January but found things poor. On 3 January it was good with massive long bursts from GM4OGT, GM3WOJ, LA6QBA, G4OHBK, G18YOZ and GM4CPX."

144MHz

G3NOH: "Not a great deal of success to report. Had no skeds but on random heard and called I3YXO, I4BXN, I79LK, OE3JPC and OK1KRA. No contacts. Completed

*6 Lerryn Gardens, Broadstairs, Kent CT10 3BT.

with HB9BZA in three periods and EA3DXU in six periods, all on cw. Shower was better than the Geminids in that there were much longer pings, though activity was lower."

G3IMV: "Not much success in this shower, but had only a few skeds. Those I arranged were mostly difficult ones, UC2OF (PM), UZ3DD (SQ), UV1AS (PT) and RT5UB (PK) and not a tweet from any of them. My easier skeds were with EB3CNX and EA3MD in BB, and HG5CW7 in JH, all completed. The sked with EA3AM on 4 January at 1100gmt was fantastic, with so many bursts I could not process them fast enough. We completed in about 12min and finished by sending fb 73 and graciast. Listening around on 4 January I heard many skeds being completed with EA, HG, LA so it would seem that it was quite a good day."

Seventy megahertz


Although the 70MHz band has been somewhat eclipsed by the wider release of 50MHz facilities, there are fortunately still some operators who find the band interesting. One enlightened use of a part of the spectrum not exactly burdened by QRM is by the Stratford-upon-Avon & District ARS, which by now should be operating a club net on 70.475MHz fm. As soon as the band was allocated to Class B licensees, they looked around for some low-price 70MHz rigs, and subsequently were able to purchase 22 GEC Worcester transmitter-receivers at a favourable price. When Clive, G0CHO, wrote, they were awaiting crystals for these units, and were considering the use of vertical polarisation since some of the members wanted to try mobile operation on the band. This seems to me to be a great idea for keeping club members in touch with one another, quite apart from it being the sort of group project which is missing in so many amateur radio clubs these days. It will be good to hear how the scheme progresses, but let's hope that the Stratford club will start a run on similar equipment purchases with a marked increase in activity on this band.

"Use it or lose it" is a hackneyed phrase, but one which still should be heeded with commercial interests hungry for new spectrum space.

Alan Doherty, G8YDZ (Co Antrim), says that G4SZU should by now be ORV on 70MHz since he (Alan) helped him to align his transverter. Bill, GM4DGT, in recent correspondence mentioned a contact on the band with EI9FK, so here are two more nice ones to work. Finally, the Cambridgeshire Repeater Group in its newsletter No 14 (secretary G8XMS), gave instructions for tuning the Pye Westminster for use on 70MHz, so things could be looking up on that band this summer. If only someone would design a small antenna for 70MHz which looked more like a standard tv or fm broadcast array, more people might feel inclined to use the band.

Repeater news

I liked the cover picture on the Cambridgeshire Repeater Group's Newsletter No 14, reproduced here. It relates, of course, to the group's packet radio repeater GB3PX which, the newsletter says, came on the air

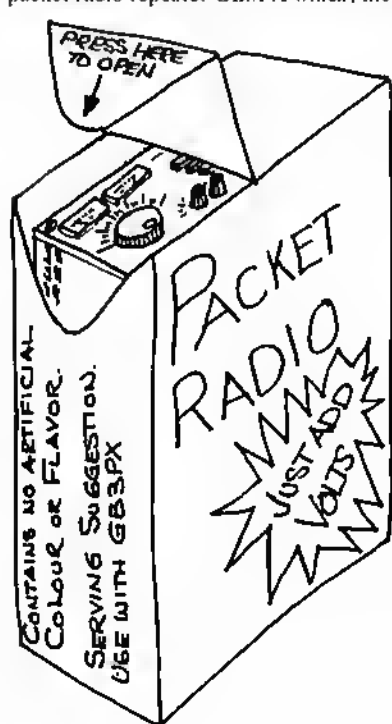

within 48h of the licence being received on 13 August, and was soon digipeating some 5,000-8,000 packets per day, half of them in the evening period between 7pm and midnight. Most users seem to be located within 80km of the repeater, though there are some regulars 100km or more distant. The repeater has direct paths to Potters Bar GB3HQ, Bury St Edmunds GB3EA, and Norwich GB3NP, and thus provides a vital link in the UK packet radio network. The group is lucky to have James Miller, G3RUH, as a local. His amateur radio software is well known and greatly respected, and in this newsletter he has contributed a short article "Packet Radio - Reading the Mail".

The Cambridgeshire group also operates the video repeater GB3PV (RMT2) which has been QRT for maintenance work but should now be operational. Some snippets of news of its other repeaters: GB3PI (R6) now has its over-deviation meter set at 6.4kHz and a new antenna fitted; for GB3PY (RB14) a move back to Madingley was in process when the newsletter was published and there was interest in using the system for experiments with a uhf diversity system like the one described in an article by G8DOR in *Rad Com*; there were plans for fitting a real-time clock to GB3PT (RB12), and, finally, GB3PS (RM3) had suffered a pa stage failure, now rectified, and the repeater operates in beacon mode on 1.297-075MHz when not otherwise in use.

Another newsletter, this time from the Aylesbury Vale Group, gave notice of its agm on 17 February when the group membership stood at 180, (including three swls). The annual subscription of £3.50 seems very modest since the group provides three repeaters in GB3VA (R4), GB3AV (RB2) and GB3BV (RB1). The group sought its members' views on proposals to install a digipeater and tv repeater in the Aylesbury area, but the response was not large enough to justify further action at present. GB3VA suffered from a few irritating faults which were soon cleared, while GB3AV has been the subject of a major revamp of the antenna system which necessitated a shut-down for a couple of days in July. This has improved the repeater's coverage and also enabled some annoying interference problems to be identified and cleared up. When the QRM persisted after a change of mast and antennas (now Jaybeam stacked dipoles), a fuller investigation showed that the culprit was no more than a faulty BNC plug on a lead from the transmit cavity filter unit. Replacement by an N-type which avoided the use of adaptors solved the problem. Food for thought here! GB3BV lost its power for a couple of days in the October hurricane and so was off the air as it does not have battery back-up facilities. This repeater is used mainly by mobiles passing through the area.

Central Scotland FM Group's winter 1987 newsletter acknowledged the tenth anniversary of GB3CS (R6), and was crammed with its usual wealth of information which would make very interesting reading if only I had space to reproduce it here. Colin Dalziel, GM8LBC, has produced no less than 40 issues of this newsletter since taking on the job as editor, and it goes from strength to strength under his guidance, so either borrow a copy or join this active group! A recruitment campaign by the CSMG has borne fruit, and new members to the group are welcomed in this issue and also encouraged to submit their own articles for publication; a point which editors of all newsletters will want me to mention, I am sure.

The switch-on of repeater GB3NG (North Grampian, R1) during November was announced. It shares Channel R1 with GB3PA and GB3HG, and also OY3REA on the Faeroes, sometimes copied in Scotland. GB3NG is located on Marmond Hill between Fraserburgh and Peterhead, and should link up 144MHz coverage from GB3GN (R7) to the south and GB3SS (R0) to the west. The newsletter also comments on the growth of packet radio, with 27 such repeaters listed as active and five more in the licensing process.

Also reported is the very good news that Mike Dennison, G3XDV, RMG chairman, is back at work after a spell of ill-health from which a full recovery may take some time. It is doubtful whether the majority of operators who use repeaters realise what they owe to Mike for his untiring and often unrecognised work on the administrative side, which leaves him little time to do anything else with his spare time, let alone go on the air. We wish you well, Mike.

From here and there

If you think our vhf bands are becoming crowded, perhaps you would like to try Japan. In a letter to *Oscar News*, Shinichi Sudo, JQ1HXT, wrote "Japan is a small country, but there are 727,000 amateur stations, more than 30 per cent of them in the Tokyo area, and they use 144/430MHz fm rigs to make an easy QSO. Maybe you can't imagine the battle to find a clear frequency and keep it after finding it".

I checked the population of Japan and found that in 1979 it was 113 million (UK 56 million). On this basis, the population density works out at 303 to the square kilometre, the UK figure being 228, not so very different you might think. However, looked at another way, the figures imply that taking Japan as a whole, one in every 155 of its citizens must hold an amateur licence, compared with less than one per thousand in the UK, so not all of those black boxes manufactured by Yaesu and Icom go for export. Here's the crunch, though. If 30 per cent of Japanese licensed amateurs live in Tokyo, then one in every 50 of the population of that teeming city is a radio amateur, some 220,000 operators in all! I think I will settle for Broadstairs.

John, G3IMV (Bletchley), has worked 405 squares on 144MHz and has

394 of them confirmed. This was achieved using the "normal" modes – that is, no eme – which some contenders for the UK Top spot use to wrinkle out the rarer ones. Incidentally, there are very few G stations with scores above 300 featured in the higher echelons of the *Dubus* World Wide 144MHz Top List, but this could be because they don't bother to report. G3IMV would very much like to receive cards from ZB2BL and EA9HW, both worked in sporadic-E events on 144MHz, since not only are they prized contacts, but cards from these stations would bring John closer to 400 squares confirmed. Has anyone else worked ZB2 on



The GJ41CD linear amplifiers, for 144 and 432MHz, on either side of the transceiver. These amplifiers use a 3CX800 valve and are easily capable of full legal output when driven from a 10W source. Photo: GJ41CD

144MHz by any mode? I have always felt that Gibraltar suffers from lack of 144MHz activity, rather than the distance from the UK being the reason for the country being a rare one for the band.

Geoff Brown, GJ41CD, is tape-recording all significant 50MHz signals during 1988, and has already sent some interesting tapes of the Quadrantids and the aurora on 2 January.

The tape recorder which I use is a modified stereo-deck supplied a few years ago by Oscar, SM5CHK, which as well as being good for meteor scatter, sits well on the shelf with all its controls in convenient positions so it is immediately available for general recording when things are happening. Hundreds of feet of tape collected over the years have provided useful demonstration material for club talks, sometimes effective in preventing members of the audience from dozing off! By regularly dubbing off the interesting bits, tapes can, of course, be re-used, and if the tape recorder is equipped for variable speed operation, running the tape at very low speed enables the normal cassette time to be increased considerably without quality being greatly affected.

QST for December 1987 contains topics of interest to vhf operators. An article by Steve Powlshen, K1FO, discusses the optimum design of Yagi antennas for 432MHz, commenting: "The latest rage seems to be for extremely long antennas – more than 10 wavelengths". Steve mentions NC11, who successfully used 16 Yagis, each about 24ft long in the boom, for eme work. I reckon that an array like that could certainly bring in the Syledis at my location.

In the same issue, Doug DeMaw, W1FB, describes a home-brew vhf wattmeter which is not very frequency sensitive and so good for both 50 and 144MHz, and very easy to construct. He also gives details of a receive noise-bridge based on a 555 timer chip and a couple of 2N2222A transistors. He comments: "If you have never built or used a noise bridge, this may be the time for you to do it. You will find this instrument particularly handy if you are an antenna experimenter. It tells you much more than your ordinary swr indicator can".

that category. If you are an swl who is new to vhf, and you have converters for these bands, it might be worth having a listen and submitting a log. You might then feel like having a go at a longer event when your entry will also count for points in the Listener Championship. Another fact to bear in mind is that on the Continent there is always a vhf or uhf contest on the first weekend of each month, which, if conditions are reasonable, will net you a few new squares etc.

Date	Contest	Time
5/6 March	144/432MHz	1400-1400
28/29 May	144MHz	New contest
2/3 July	VHF/NFD	1400-1400
30 July	144MHz Low Power	1500-2300
31 July	432MHz Low Power	0900-1500
3/4 Sept	144MHz	1400-1400
18 Sept	70MHz	0900-1600

Other contests with an swl section but which do not count for the championship are:

21 February	432MHz AFS	0900-1500
1/2 October	432MHz	1400-1400
4 December	144MHz AFS	0900-1700

If I have whetted any appetites, look for the rules for the contests at the appropriate time in "Contest News", and do not forget that the general rules for swl contests must also be adhered to.

The irc, sase and sae

Our newer readers might find these paragraphs useful (and some older hands might benefit from a friendly hint!). Most of us know what an irc is: it is an international reply coupon, which is the universal unit of exchange for anyone who collects QSL cards, awards etc. They can be used to purchase postage stamps to pay for the return of that QSL (or award – in which case the number of ircs required will also cover the cost of the certificate). Any number from 5 to 10 ircs is usual for such purposes). IRCs are often available at reasonable cost from QSL managers, but failing that, they can be purchased from any Post Office. It should be noted that they are valid only if the current edition is used (they do change on an irregular basis) and are stamped by the issuing office on the left-hand side. One irc is sufficient for a return card from Europe, while, in general, you will need two to get a QSL from the USA or Africa, and three from Oceania and Asia.

SASE means self-addressed stamped envelope, which is an elaboration of sae, which in amateur radio parlance, means self-addressed envelope. An sase should be used when asking for a QSL card direct from any

SWL

*Bob Treacher, BRS32525**

The general certification rule

Any swl interested in award hunting will have come across the general certification rule (ger), which is the generally accepted method of proving that you actually possess the cards required for an award. The applicant provides the sponsor with a list of the QSL cards held which meet the requirements for the award, and indicates that the information is correct. The ger is a statement on the claim which says something to the effect that the information and/or QSL cards have been checked and certified as being correct by one or two licensed amateurs. Most sponsors require two signatures and dates of witness, some will require a club officer to sign, others will specify officials of an IARU associated club. Some, however, will ask for the signature of a person from a national organisation, in such cases, the cards/information can be sent to GW4BKG, who does this job on behalf of the RSGB. It is most important that you read the rules carefully and comply with them.

UHF/VHF contests

Last year produced an exciting finish to the UHF/VHF Listener Championship, but the number of listeners participating was quite low. It is surprising that so few listeners apparently take vhf seriously, and that even fewer take part in the extensive programme of contests which the Society runs and which are open to listeners during the course of the year. I wonder why that is? I would be interested to know.

The winner of the Listener Championship receives a cup to keep for the year, so there is an end result. Hopefully, the number of listeners taking part in 1988 will show a significant increase, and the VHF Contests Committee will be suitably encouraged and might even consider increasing the number of contests which have listener sections. A list of the contests with listener sections in 1988 is given below, but it is also worth noting that the committee encourages check logs from swls when there is no swl section. Indeed, for 1988 there are to be two new contests on 50 and 70MHz on 2 and 3 April (and 50MHz on 23 October) which fall into

*93 Eltham Road, Eltham, London SE9 1QJ.



The shack of Maurice Wilcox, BR50930

British amateur. An sac should be included with your ire when trying to get a direct QSL card (or any reply) from abroad. (Generally, of course, sac means stamped, addressed envelope – you are unlikely to get a reply from an advertiser who requests an sac unless it is stamped – Ed).

Any questions?

I have received several questions in the mail, the answers to which will benefit many others. The first one is about logging both sides of a QSO in hf swl contests. If both sides of the QSO can be heard, both can be claimed for points. This is done as shown below.

Date	Time	Station	Station	Report	Points
12/1	2245	PA0XXX	DL3YYY	59	1
12/1	2245	DL3YYY	PA0XXX	59	1

Secondly, I have been asked if the Society produces a logsheet specifically for the swl; the answer is, not at present, but as there would be advantages it is something I will pursue with the HF Contests Committee.

The third query is about tv-dxing. I have some knowledge of this, as I purchased a dx tv in 1987 specifically to monitor European broadcasts on vhf in an effort to know when sporadic-E openings might occur on vhf above 30MHz. There are two ways of proceeding – either find a commercial outlet which sells tv sets which are set up for use in the Continent, or pick up a Lufthansa "feleverta" which will enable you to use your domestic tv for the purpose. The topic can be expanded, and I will try to do so in a later column in readiness for the summer vhf sporadic-E season.

Finally, a query about swl membership of the society. If you are under 18 you should quote "ARS" (Associate Receiving Station) on QSL cards, correspondence etc. "BRS" is reserved for members who are over 18 years of age.

News bulletins

Listeners will be interested to know that the ARRL transmits daily news bulletins, which include propagation forecasts, from W1AW, while VERON provides weekly bulletins of dx news from P14AA. The following schedule was correct at the time of compiling the column. W1AW: CW at 18wpm. Daily at 0100, 0400 and 2200gmt, and Monday to Friday at 1500gmt on 3,580, 7,080, 14,070, 21,080 and 28,100kHz. SSB: Daily at 0230 and 0530gmt on 3,990, 7,290, 14,290, 21,390 and 28,590kHz.

P14AA: SSB: Fridays at 1845gmt on 3,602 and 14,103kHz.

Around the bands

Quite a few reports this time to reflect activity during the Christmas and New Year holidays. Colin Watson, BR546598, spent some time on 3.5MHz and heard J6LRV, OD5VT, VP5EE, VS6DO (around 2315) and ZC4AP.

Michel Munteil, F1ATZ, updated things from mid-France. The end of 1987 provided the usual exotic callsigns at the top end of 3.5MHz, including N7JW (Idaho), VK2AVA and YB0WR. Also heard were no less than four stations from Iceland. The 28MHz band provided Y10BIF, A4XKA, XX9WW, 5H3SW, four TZs and A22RB. The pick of the crop on 14MHz was FR4DO.

Robert Small, BR58841, had a good month, but thought that conditions on the lower bands had been poor, with nothing of real significance being heard. He had not heard much on 28MHz, compared to Michel's list. Best dx was FT5ZB on 7 and 21MHz, 5H1HK on 3.5MHz and VK9YD/VK9X on 21MHz. On 24MHz he had added T12KD, and 7MHz had also given him two stations from Nepal, 9N7YDY and 9N5QL, and PY0FNI in Fernando de Noronha. Robert points out, quite correctly, that P4 (Aruba) can now be added to the DXCC list and included in figures for the all-time table.

Finale

Due to the late arrival of the January magazine, the 1987 Countries table has been held over. The final table will appear next month.

News and views for inclusion in the May column must be with me no later than 7 March, with late copy received by 15 March.

MICROWAVES

Mike Dixon, G3PFR*

A local oscillator multiplier for 2,176MHz

This low-power active doubler was designed to work with the G4DDK local oscillator (lo) board and gives two outputs at 2,176MHz suitable for transverters covering 2,320 to 2,322MHz using a 144MHz i.f. For an input of 10mW at 1,088MHz, the two outputs are +5dBm (about 3mW) and 0dBm (1mW), the former suitable for the transmit mixer and the latter for a receive converter, eg interdigital.

A special pcb is not needed since the output lines are air-spaced striplines made from brass or copper strip suspended above a groundplane. This method of construction gives higher Q than microstrip printed on epoxy board.

The original doubler was built on a specially-extended G4DDK lo board but if you already have the board produced by the components service, it can be extended by 35mm by cutting a piece of double-clad board and "bridge"-soldering it to the end of the lo board using narrow strips of thin copper or brass. The board will no longer fit in the original diecast box!

The circuit and component values are given in Fig1, and the layout in Fig 2. Both are largely self-explanatory.

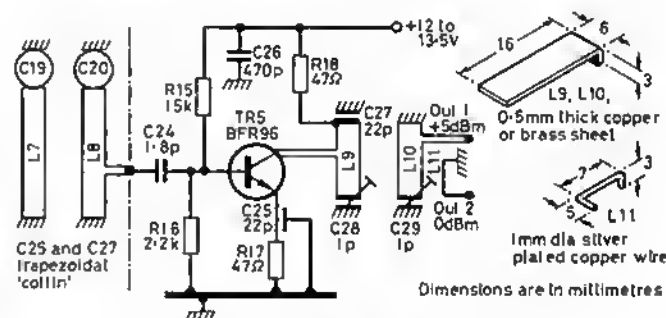


Fig 1. Local oscillator doubler circuit

C28 and C29 are mounted through holes drilled 8.5mm apart in the board. The wire connection at the top of the trimmer is the "wrong" way up and the tuning screw is "hot". This means that an insulated trimming tool must be used for alignment. C27 is soldered with its centre about 15mm from C28. L9 is soldered to C27 at one end and C28 at the other. L10 is soldered to ground at one end and to C29 at the other. A 2mm-wide strip of copper is soldered to L10 5mm from the bend and connects to the spill of the output socket. L11 is soldered in place as shown. It is spaced 1 to 2mm from L10 with the output end level with the end of L10.

The output sockets are miniature types such as SMA/B/C. These are mounted on the end walls of a box formed by sheets of double-clad pcb material (or tin-plate) soldered around the board. TR5 collector lead is soldered 8mm from C28 and is kept as short as possible. C25 is soldered to the groundplane as shown. TR5 base-lead supports R15, R16 and C24. C24 leads should be made as short as possible.

The lo board should be crystallised for output at 1,088MHz (high-stability crystal at 90.66667MHz) and it is wise to check that at least 10mW at 1,088MHz is available before attempting to align the multiplier. Refer to the original article in *Microwaves* Feb/March 1987, for details of alignment. In the absence of a spectrum analyser, connect an absorption wavemeter tuned to 2,176MHz to the output. Tune C28 and C29 for maximum output. Slightly readjust the position of L11 to obtain 1mW at Output 2. It will be necessary to retune C29 if L11 is moved too far. If

*"Woodstock", Gaze Bank, Norley, Warrington, Cheshire WA6 8LL.

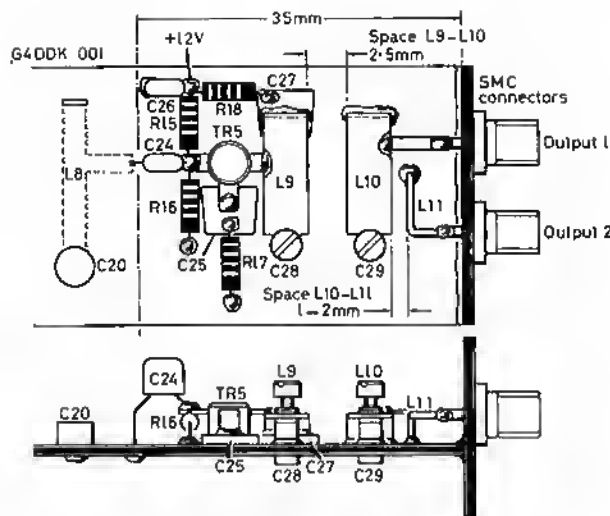


Fig 2. Physical construction of the doubler circuit

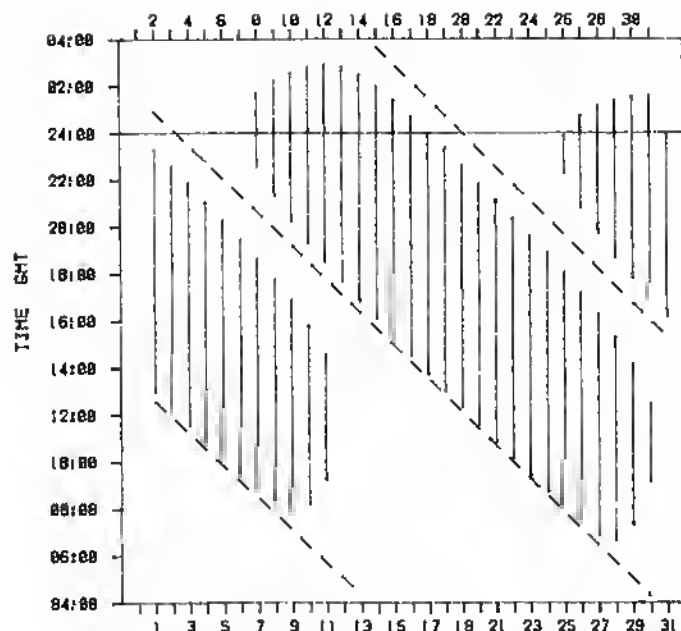


Fig 1. OSCAR 10 VISIBILITY (London area) - MARCH 1988
----- satellite in view ----- perigee (MA=0)

Output 2 is not needed, then remove L11 completely: this should be worth a few extra decibels at Output 1.

Although not tried, it should be possible to tune the output circuit to at least 2.4GHz, thus opening the possibility of using the kit for low-power transmitter or beacon purposes. The addition of an Avantek MSA04 ModAmp (or similar) would allow more than 11mW to be generated: more than enough for a short-range point-to-point link, especially if high-gain antennas are used at both ends!

My thanks to G4DDK for these details of a most useful addition to his basic board.

Errors and omissions

My apologies for a number of minor "typographical" errors which have recently gone uncorrected, due mainly to the production problems of which most readers will be well aware. However, a couple of errors have also crept in. First, the 1.3GHz beacon on Brown Clee is, of course, GB3CLE (correct in the text but not in the caption to the photograph) and, second, Martyn, GUCZD, prompted me with the fact that that beacon was built and is operated and maintained by members of the Shrewsbury (not Telford) ARC.

Just a further quick thought about "personal" beacons. Instead of placing the output in the beacon sub-band as recommended by the statement "Don't forget the band plans", if all personal beacon users settled on a common frequency, just below the bottom of the beacon band say, other band users would know where to look for such signals: this could provide quite a useful unofficial service! Ideas, please. □

SATELLITES

Bob Phillips, G4IQQ*

Oscar 10

The satellite has provided some very useful communication opportunities since it came back into service in mid-November, but further analysis by James Miller shows that the sun angle will be such from the beginning of March that the illumination will fall below the critical 50 per cent value. Hence, unless otherwise informed, use of the Mode B transponder should cease from that time for a period of several months. For those who may wish to use the satellite's beacon signal for equipment checking purposes, I have included the visibility chart for the satellite for the month. Very high elevation angles (up to around 60°) will be experienced both at the beginning of the month and during the third week or so.

Amsat-Oscar 13

The latest news about the launch is that a window around noon between 30 April and 4 May has been selected, but this is critically dependent on no further problems with the next Ariane launch. If the above date is

*Transvaal Cottage, New Barn Road, Swanley, Kent BR8 7PW.

adhered to, it should be remembered that a check-out period of at least four to six weeks will be required before the satellite can be declared operational.

Uosat

The command station suffered further storm damage during the inclement weather in January, but operation of both satellites has been possible with only minor interruptions. Problems with the new software for the Uosat Oscar 11 satellite diary have required a return to the original version so that checks may be carried out on the area of memory allocated to the Forth diary. Special software routines check-out the suspect 32kbyte memory section will be run to identify defective memory locations.

The University of Surrey has provided a pre-recorded telephone message system for a number of years providing information on both satellites. Uosat Oscar 9 data can be heard on Guildford (0483) 61707 and that for Uosat Oscar 11 on 0483 61202. The university is currently reviewing the provision of this service and would be pleased to hear from users before coming to any decisions on future activities.

Fuji Oscar 12

At the time of writing, the satellite's bulletin board was not in operation and hence the schedule was not known.

Other news

Planning for the launch of Amsat-UK's balloon transponder, HART, continues, and it is hoped that two separate flights will be made in the near future. The beacon unit has been undergoing check-out from G4CUO, and appears to be functioning well.

The three-month transpolar skitrek by a combined Canadian/USSR group will start around the beginning of March. Leonid Labutin will be among the group and will be making use of the Uosat satellites for communication and navigation purposes. Details of the progress of the group will be relayed using the Uosat Oscar 11 digital speech synthesiser, allowing reception in small hf/mf receivers.

The USSR-managed space station Mir has caused a great deal of interest both in respect of the record-breaking feats of the cosmonauts and their radio activity. The frequency 143.625MHz is used a great deal and has attracted a growing group of listeners. Typical equipment consists of a simple antenna with a 144/28MHz converter feeding a cb receiver (Channel 3 f). Proposals to use parts of the amateur satellite sub-bands at 144 and 435MHz for terrestrial fm operation in Japan have resulted in a storm of protest from most regions of the world. The Japanese Amateur Relay League has received some 700 letters of protest against the proposed action. It is understood that JARL has been taken by surprise by the level of interest and concern, and has undertaken to take the comments into account when finalising its position on the matter. □

DATA COMMS

Ian Wade, G3NRW*

The 1987 UK packet experiment

The RSGB Packet Working Group (PWG), under the chairmanship of Mike Dennison, G3XDV, recently produced its report on the progress of the 1987 UK packet experiment. The full text of the report is contained in the January 1988 issue of RSGB's *Connect International* packet newsletter, but here for non-subscribers is a summary of the key points.

A copy of the full report is available from RSGB Publications (Sales) at a cost of £1 (members) or £1.18 (non-members) inc p & p.

A brief history

By mid-1986, packet radio in the UK had increased from the original handful of pioneers to several hundred stations. In August 1986 some 14 digipeater proposals (known as Phase 1) were submitted to the DTI, and most of these were licensed just six weeks later. In March 1987, the PWG was set up in its present form, as a sub-committee of the Repeater Management Group (RMG), and comprised those most active in the field at the time.

All 14 of the Phase 1 GB3 digipeaters were operational by March 1987, with four of them running mailboxes. It had been intended that these units would form the experiment, and that after the end of 1987 more licences would be applied for. However, by mid-1987, the volume of traffic had risen to such a level that applications were solicited for a second phase of digipeaters, and as a result a further 13 became operational by November.

Thus, by the end of December, there were 27 GB3 digipeaters, some of them by now linked with network level software (eg NET/ROM), and five official mailboxes, located at various points throughout the UK. These were complemented by several hundred *ad-hoc* digipeaters and around 60 other mailboxes. Unfortunately, with such a high level of uncontrolled activity, almost all of it being on a single frequency (144-650MHz), the formal experiment was swamped, and the active experiments originally planned were largely reduced to passive observations. In particular, the worst loss was the inability to experiment with real-time communication over long distances, as the channel was overloaded for much of the time with mailbox-to-mailbox traffic.

On the other hand, what would have been a very limited experiment became a viable country-wide service, providing some real-time capability and a comprehensive mailbox service with overnight forwarding between stations. The large number of mailboxes also allowed most useful observations to be made on what level of congestion slows down communication, and what ultimately prevents it altogether.

Band planning

International band planning, essential to the coexistence of a great many modes of operation, is determined by the IARU. Many months before the IARU Region 1 conference in April 1987, RSGB submitted a paper concerning packet radio band planning, proposing the use of the 430MHz band as the main packet network access band. At the same time, the DTI were asked for a single frequency in that band for formal network nodes. But, much to RSGB's surprise, the DTI rejected the application because the primary user had refused permission for any new networks on the band.

This forced the temporary abandonment of plans to establish a formal network on 430MHz, and led to the setting up of the limited-duration experiment on 144MHz. A compromise agreement was reached at the IARU conference, whereby no formal linking was to be carried out on 144MHz, but the sub-band 144-625 - 144-675MHz would be allocated to data comms.

Also, around this time, it became apparent that the allocation of a primary-user segment of 50MHz in the UK would permit very rapid licensing of GB packet stations (a few weeks, compared with 1-2 years on 430MHz), and the RSGB VHF Committee allocated 50.6-50.7MHz to formal packet nodes. However, just as packet operators started to conduct experiments, the DTI announced that it was not, after all, able to permit large numbers of unattended stations on the band, owing to international considerations. Back to square one, almost, except that the DTI has since indicated there may no longer be objections to using 430MHz, and moves are now afoot to streamline the licensing procedures for that band.

* 7 Daubency Close, Harlington, Dunstable, Bedfordshire LU5 6NF.

Congestion

The carrier sense multiple access (csma) method used in AX.25 works reasonably well, and allows several stations in an area to share a frequency. However, in certain parts of the country, 144-650MHz reached saturation long ago. One well-sited station near London, G4SWY, carried out an activity survey, regularly monitoring between 150 and 250 different stations each day. At the peak of congestion, it can take several minutes to pass each packet frame, making useful communication virtually impossible. By far the highest proportion of traffic arises from mailboxes talking to each other, and that is why the PWG is convinced that mailboxes need special co-ordination, best achieved by special licensing.

Licensing

The amateur licence was written many years ago when the hobby was fairly stable, and packet radio was certainly not envisaged. At the start of 1986, the DTI agreed in principle to change the licence. The proposed changes (not yet implemented at the time of writing) are as follows:

1. "Third party traffic" is to be interpreted to mean traffic originated by or destined for non-amateur stations.
2. Permission to be granted to run under automatic control (eg using a tnc).
3. Unattended operation to be permitted on the 144-146MHz band, at the licensee's home address, and with a power limit of 25W erp. This will have the effect of permitting *ad-hoc* unattended 144MHz digipeaters without the need for GB licences.
4. A log may be kept on magnetic disc.
5. Logging of digipeater operation will only require start and finish of period of availability of use.
6. Mailboxes will be explicitly declared as illegal without a special licence.

Secondary station identifiers (ssids)

An ssid is a decimal number in the range 0 to 15, and is an extension to a callsign, intended to denote a particular application or to distinguish between several stations running simultaneously under the same callsign (eg G3XDV-0, G3XDV-1, G3XDV-2, and so on). It is often useful to know on which band a particular station is working when setting up a multi-band path, and so the PWG has proposed the following ssid assignments:

For formal (GB7) packet nodes

- 0 Not allocated
- 1 Microwave band
- 2 144MHz
- 3 3-5 or 7MHz
- 4 70MHz
- 5 14, 21 or 28MHz
- 6 50MHz
- 7 430MHz

For non-network stations

- 0 A real human operator at home
- 1 /A or /P
- 2 (Not allocated)
- 3 /M
- 4 (Not allocated)
- 5 (Not allocated)
- 6 (Not allocated)
- 7 (Not allocated)

NET/ROM stations use ssids -8 to -15 for downlinks.

Packet radio in 1988

It is expected that packet radio will continue to change at its present very fast rate during 1988. The PWG firmly believes that it should continue with its present policies, rather than make any major change in direction. Since we are unable to comply with IARU recommendations regarding frequencies for formal networks, the 144MHz experiment will continue for another year. With the licensing of additional bands for mailboxes and trunk nodes, more and more linking will move off the 144MHz band. This will make mail forwarding quicker, will make real-time contacts possible, and will speed up communication with mailboxes and network nodes on the user access frequency.

The PWG, via the RMG and VHF Committee, will seek to alter IARU policy regarding 144MHz, especially in respect of gateway stations. This will be done by submitting papers to the vhf managers' meeting in the summer. The PWG will also continue to liaise with the DTI regarding licence conditions and licensing procedures. An urgent matter will be the speeding up of the link licensing procedure. There will be close liaison with the RSGB HF Committee regarding planning for formal hf packet nodes. It is hoped that hf mailboxes and links using both Amtor and packet can be connected to the UK network, resulting in simple and rapid worldwide message handling.

It is anticipated that by the end of 1988 the UK packet network will look significantly different from the way it does now. Most formal nodes will be licensed, with user access traffic and link traffic being totally separate. The PWG's projected fully-interlinked multi-frequency network should have become a reality, and both real-time and mail traffic will be fast. It will then be a matter of building and improving on that network, and experimenting with Level 3 and above, rather than the radio side of networking. It is also expected that packet radio will become more of a tool, and less of a hobby in itself. □

Contest News

50MHz Fixed Station Contest results

Conditions for this first 50MHz event were generally poor, although enlivened for some by a sporadic E opening into Iberia and some evidence of Es the station in Scotland and the Channel Isles. Many stations complained of timebase ORM.

Not surprisingly, the contest produced a number of problems, particularly relating to the scoring system and to contacts with Spain. Advice was obtained from RSGB HQ regarding the legality of Spanish 50MHz operation, particularly as the station in question was stating over the air that he could not work in contests! As a result, all Spanish contacts have been disallowed. Given that the best UK dx was generally around 300km (exceptions included G6OFR to G4JICD at 870km), the contest became something of a lottery between those who did work CT4KO and those who didn't. This distortion in scoring will be dealt with in future contests so as to make chance E- or F-layer contacts less influential. In many logs, a contact with CT4KO accounted for between 30 and 60 per cent of the overall score.

Several stations commented on the lack of GW activity, and this was borne out by the logs with very few GWs appearing. A cry of anguish was issued by G6OFR who heard nothing outside Scotland other than GJ, emphasising the marked change in propagation between 50 and 70MHz, a point echoed by G3XBY.

One station lost many points through neglecting to obtain the full QTH information required by the contest rules. The onus is on the contest operator to obtain this information if it is not altered, but is available.

Overall, the contest was well received, the main complaint being about the lack of promotion for it in *Rad Com*. Unfortunately this was beyond the control of the VHF Contests Committee. Several of the more masochistic contestants suggested another contest in June or July, to take advantage of the more enhanced propagation and its accompanying pandemonium. This idea will be considered, bearing in mind the possible increased risk of interference to Continental broadcast services.

The new Tallard Trophy will be awarded, subject to Council approval, to the overall winner, G3XBY. Certificates and congratulations go to G3XBY and G3JXN in the single-op section and to G4JIE in the multi-op (operators, G4JIE, G6CPU).

G4WAD

SINGLE-OPERATOR SIX HOURS									
Posn	Call sign	Points	QSOs	Loc	Best dx	Km			
1	G4WAD	49,723	120	IO83JA	OK1 KDO/P	1,178			
2	G4BLX	38,628	118	IO90WV	DF9LJP	802			
3	G4CWH/P	24,864	81	JO02AA	OK1 KDO/P	940			
4	G4XEN	22,579	85	IO92PH	DLONF	897			
5	G6CPL/P	21,736	66	IO84KO	OL58G/P	898			
6	G4HVC	19,202	69	IO93QA	H898ZA/P	877			
7	G4SCZ	18,776	70	IO91KI	OL6NBE/P	784			
8	G4ARI	18,570	58	IO92UI	OL6NBE/P	784			
9	G4SNO	17,273	58	IO91BN	OK82B/P	873			
10	G6HAS	16,187	56	IO85LT	OK1 JKE/P	835			
11	G6BOC	14,180	37	IO93XN	OK1 KTL/P	956			
12	G3VPE	11,930	49	IO92GU	OL58G/P	827			
13	G4WRJ	10,616	43	IO6 1/2UX	OK82B/P	732			
14	G3WEE	9,953	34	IO93GI	DL1 HDT/P	758			
15	G4WVO/P	8,402	26	IO90PP	OL4KO/P	801			
16	G4ATR	6,712	35	IO92KP	OK82B/P	723			
17	G4BZP/P	683	5	IO84KF	G3XBY	238			

Disqualified: G4THB/P, G3WKS/P, G3LET General rule 3.

MULTI-OPERATOR 24 HOURS									
Posn	Call sign	Points	QSOs	Loc	Best dx	Km			
1	G4NUT	135,832	290	IO91OW	OK1 KKG/P	1,508			
2	G4RGK/P	65,279	182	IO91OO	SP6PAZ	1,303			

MULTI-OPERATOR SIX HOURS									
Posn	Call sign	Points	QSOs	Loc	Best dx	Km			
1	G5RSP	27,183	94	IO91PC	OF2ZC	799			
2	G4RFR	19,297	67	IO90AS	H898ZA	847			
3	G6CWC	12,002	59	IO92AL	OL1HBT/P	765			

SINGLE-OPERATOR 24 HOURS									
Posn	Call sign	Points	QSOs	Loc	Best dx	Km			
1	G3XBY	126,708	250	IO92DG	OK1 KKG/P	1,572			
2	G6OFR	87,234	119	IO87WB	OE1 XA/P	1,582			
3	G4WAD/A	73,636	176	IO92XC	SP8HWY	1,481			
4	G4GO	42,916	106	IO91OF	OK1 KEI	1,153			
5	G4JZN	37,348	77	IO93FU	SP6GWB/B	1,310			
6	G4OUT	37,672	101	IO92AT	OK1 JKT/P	1,077			
7	G3ISL	32,839	39	IO94AS	SP8ENH	1,397			
8	G4ZVS	30,852	99	IO92BK	OK1 KEI	1,227			
9	G4OBK	17,263	39	IO83RO	OK1 KTL/P	1,119			
10	G3EOO/A	16,902	27	IO70MN	OL58G/P	953			
11	G3JUZ	16,814	70	JO01AJ	H898ZA/P	708			
12	G6HGA	9,396	41	IO91VY	FE6OE/P	799			
13	G2OHV	8,307	30	JO01BK	OK82B/P	680			

70MHz CW Contest results

Compared to 1986, this year's contest had greatly increased activity and a few more entrants, most of whom called for a repeat event in 1988. The VHFCC will review its decision to drop the event in the light of the welcome feedback from the competitors. Most entrants who commented thought the event was a little short, possibly more time would allow fixed stations to "winkle out" those last few contacts.

Log-keeping standards were only fair, mistakes being made on call signs, reports and location. Information cross-checking is straightforward in 70MHz events. All entrants enjoyed the contest, even G4ZUK/P who endured icy conditions, temperatures having dropped to minus 13°C the night before at the portable site.

Congratulations to the winner and the runners-up who will receive certificates.

Posn	Call sign	Points	Loc	QSOs	Best dx	Km	Antennae
1	G4BVY/P	242	82LB	37	GM2UK/P	543	7
2	G4RFR	240	85RW	19	G4RFR	666	4
3	G4ZTR	240	63WC	20	G4ZTR	497	5
4	G4ZTR	213	01LV	28	EI9FK/P	497	5
5	G3UKV	205	82RR	36	GM2UK/P	467	5
6	G4RFR	204	90AS	26	GM2UK/P	688	12
7	G3XBY	178	92DG	34	GM2UK/P	521	3
8	G3VPE	175	93XN	23	GM2UK/P	407	4
9	G4CWH	157	01CV	26	EI9FK/P	449	5
10	G3BPM/P	95	80OU	15	G3TBK	264	4
11	G4ARI	92	92IO	22	G4RFR	216	XD
12	G3SSO	82	81VV	23	—	—	4
13	G4JNT	67	90IV	14	—	—	4
14	G2OHV	47	01BK	7	G4BVY/P	230	3
15	G5UM	39	92MP	11	EI9FK/P	360	3
16	GM3TAL	32	86GA	4	G4BVY/P	452	4
17	G4AHN	26	91OE	4	G4BVY/P	176	5

Many thanks to Checking, G4NZU.
Disqualified: G4ASR, Rules 3 and 13

70MHz Fixed Contest results

1987 has seen a significant increase in activity on 70MHz since the welcome opening of the band to all UK amateurs; most entrants commented on this and asked for more contests in 1988. This activity goes against the trend on the higher frequency bands, where the effective withdrawal of the DTI (formerly BT) engineering services preclude most amateurs operating QRO in contests from home, although most will find breakthrough can be heroic on 70MHz.

Most entrants enjoyed the contest and thought it the correct length even though conditions were described as being between "naïf" and "ewlll"; log keeping

SECTION S - SINGLE-OPERATOR STATIONS									
Posn	Call sign	Points	QSOs	Loc	Pwr(W)	Ant	Best dx	Km	
1	G3XBY	483	107	92DG	25	4Y	CT4KO	1,374	
2	G3JXN	452	93	91UM	20	4Y	CT4KO	1,342	
3	G4ZAP	441	86	93DG	10	5Y	—	—	
4	G4JCO	410	60	89WF	20	4Y	—	—	
5	G2BSJ	391	94	91NV	7.5	3Y	GM4OGT	509	
6	G6IAT	309	77	91TV	25	5Y	G4JCO	321	
7	G4UXC	285	79	92BC	20	5Y	—	—	
8	G3FOW	256	46	84ME	35	2Y	—	—	
9	G4GOY	245	48	92GJ	25	3Y	CT4KO	1,394	
10	G3ZSS	188	43	91TH	10	2Y	CT4KO	1,318	
11	G6CZD	144	45	82OS	18	3Y	—	—	
12	G6ZHV	131	44	82SP	20	3Y	—	—	
13	G4XEN	127	22	92PH	10	Op	CT4KO	1,407	
14	G3AEZ	124	32	91UE	8	3Y	G4JICD	253	
15	G4ZJY	119	60	82SO	10	5Y	G8TOL	288	
16	G4AFJ	103	13	92HO	10	6Y	CT4KO	1,417	
17	G4INL	99	30	81VV	25	3Y	—	—	
18	G4ILI	93	33	81VV	10	3Y	—	—	
19	G8CUB	93	31	01EP	25	3Y	G4JCO	395	
20	G1KDF	91	21	83NN	20	5Y	—	—	
21	G3NEO	89	11	93IL	10	3Y	CT4KO	—	
22	G4IDF	72	26	82VE	12	3Y	G4JICD	328	
23	G6OFR	46	7	87WB	15	4Y	—	—	
24	G5UM	45	14	92MP	10	4Y	G4HKS	156	

SECTION M - MULTI-OPERATOR STATIONS									
Posn	Call sign	Points	QSOs	Loc	Pwr(W)	Ant	Best dx	Km	
1	G4UE	398	81	01CT	20	5Y	CT4KO	1386	
2	G4RFR	270	50	90AS	10	5Y	G1LSB	271	
3	G3ZME	252	65	82SP	20	3Y	—	—	
4	G1YNR	126	18	93PO	15	2Q	CT4KO	1490	
5	G4MGR	113	35	83KH	80	Op	—	—	

Disqualified: G1UBL, Rule 3 (No cover sheet); G4HKS, Rule 13(i) (No times). Checklogs received with thanks from G3VKK/A, G4NBS and BRS32525.

144MHz CW and Marconi Memorial Contests November 1987 results

Conditions for these contests were exceptionally good, especially on the Saturday evening, the latter being enjoyed by the 24-hour contestants. Propagation paths extended eastwards from the whole of the UK with many QSOs into OK, SP, HA, HG and OE. In fact, the logos of many stations looked more like those of an hl contest. The maximum distance achieved by many stations was in the range 1,500-1,700km. An unusual event was reported by G3BOC who heard UB5IGO at 1015 on 8 November (2,800km) and UA6BPM at 1022 (3,200km). No other contest entrant appears to have heard this, although QSOs were believed to be in progress. The mode of propagation has not been established although meteor scatter seems most likely.

Surprisingly there was only a small increase in contest entries compared with last year but scores are dramatically increased. Needless to say, everybody was delighted with band conditions.

Certificates go to the winners of each section, and entries for both 6h and 24h sections have been sent to ARRL (Italy) for the Marconi Memorial Contest. As before, many of the 6h entrants have done well enough for a good placing in the IARU 24h contest.

G3FZL

standards were good with few mistakes, but a few stations fell foul of penalties on the entry paperwork; everyone please read the rules carefully and double check your entry for signatures, county checklists and the correct log and cover sheets.

Many thanks to all entrants; congratulations and certificates go to G3UAX the operator of G4LNV, the Reading BT Radio Club station and to G4NBS, the winner and runner-up in the single-operator section. Also to the Derbyshire Hills CG G4ZAP the winner of the multi-operator section.

SINGLE-OPERATOR SECTION

Posn	Call sign	Points	Loc	DSOs	Multi	Best dx	Km
1	G4LNV	9,312	91MK	55	32	G3JYP	361
2	G4NBS	7,680	02AF	48	30	G3JYP	308
3	G4SEU	7,488	92FM	52	32	G3JYX	320
4	G3VJP	7,317	93XN	36	27	GMOFRT	411
5	G3YJX	6,256	70NM	24	23	G3ZIG	476
6	G4ULS	6,214	82TI	57	26	G3JOC	249
7	G3FDW	5,420	84ME	31	20	G4RFR	386
8	G3TCU	5,376	91QE	40	24	G3JYP	395
9	G4BVY	5,025	82TD	43	25	G3JYX	269
10	G4IJE	4,784	01CT	38	26	G3JYX	382
11	G4AFJ	3,816	92HD	31	24	G3JYX	355
12	G3W4HBK	3,234	81KP	29	22	G3VJP	298
13	G8PNN	3,145	95EF	24	17	G4RFR	495
14	GMOFRT	2,167	87WB	11	11	G4RFR	699
15	G8DXC	1,920	02DL	20	16	G4MGR	247
16	G3BPM	1,456	80QW	19	16	G4ZAP	251
17	G6XM	781	70XR	11	11	G4ZAP	304
18	G3NKS	540	81XU	16	10	G3ZIG	231

MULTI-OPERATOR SECTION

Posn	Call sign	Points	Loc	DSOs	Multi	Best dx	Km
1	G4ZAP	21,684	93DC	80	42	G4TOJ	408
2	G4RFR	16,355	90AS	73	39	G8PNN	495
3	G4MGR	12,192	83KH	59	32	GMOFRT	422
4	G4ATH	6,425	83LU	35	25	G3YJX	390
5	G1RZA	2,880	93JA	32	20	G4RFR	255
6	G6FPX	1,921	83DK	23	17	GMOFRT	406

Check log from G0FRE.
Disqualified: G3XBY rule 3, G4ASR rule 3 and rule 13.

Jubilee VHF National Field Day 1988 rules

As part of the celebrations of the 75th Anniversary of the Society, special jubilee certificates will be awarded to every affiliated society submitting a valid entry to this year's VHF National Field Day.

This year's rules are similar to last year's, no changes in the bands used have been made.

Stations wishing to take part in this year's VHF NFD must register their site by 1 June at the latest, see rule 2.

SWL entries will be very welcome and will count towards the VHF Listeners Championship.

The general rules published in "Contest News", *Rad Com* January 1988, will apply except as modified by these rules.

1. **Duration.** 1400gmt 2 July 1988 to 1400gmt 3 July 1988.

2. **Site notification.** Each group intending to compete must send details of the site to be used to: VHF Contests Committee, c/o J H Quarmby, G3XDY, 12 Chestnut Close, Rushmore St Andrew, Ipswich (IP5 7ED), to arrive no later than 1 June 1988. The details required are: the name and address of the person responsible for the entry, the name of the group, the call signs to be used on each band, the section (open or restricted), the locator and national grid reference of the site, and sufficient access information for an inspector to locate the site (preferably a sketch map). A stamped addressed postcard should be included if confirmation of receipt is required.

3. **Bands.** Up to four separate stations can be used, operating on the 70, 144, 432, 1,296 and 2,320MHz bands. Single-band entries for 144MHz will not be accepted. Only one station can score or give points on each band. On 70MHz, stations must use cw only during the period 1400-2200gmt, phone only during the period 0600-1400gmt, and close down between 2200gmt and 0600gmt. The same call sign must be used on 1-3 and 2-3GHz, with no simultaneous operation on these two bands.

4. **Operators.** Any RSGB member or group of members operating from the British Isles (excluding Eire) may enter. Groups operating from the same site may combine their scores subject to rules 3 and 5.

5. **Stations.** All the stations forming one entry must operate from within a circle of 1km radius centred on the operating position of any of the stations. All equipment, including antennas, must be installed on site not more than 24h before the contest, and the site must not be used by the entrant for transmitting activities during the live days prior to the contest. Only portable accommodation can be used to house the stations. Power for all equipment must be derived from an on-site generator or battery. The public mains supply may not be used.

6. **Scoring.** Contacts will be scored by the radial ring system. Scores from the two 70MHz sessions will be added to give the final 70MHz score. Scores on 1-3 and 2-3GHz will be added together to give a final microwave score. The overall score will be determined as per general rule 10 using the final 70MHz, 144MHz, 432MHz and microwave scores.

7. Contest exchanges

(a) On 70MHz the contest exchange must include the QTH, given in a different form in each session. Serial numbers start from 001 in each session, and one scoring contact can be made with a given station in each session.

(b) On 144, 432, 1,296 and 2,320MHz, QTH information need not be exchanged. One scoring contact can be made with any given station on each band.

(c) Contacts with stations whose call signs appear on any of the group's cover sheets will not count for points.

8. Sections. There will be two sections:

(A) Restricted section:

(i) The power output on any band must not exceed 25W p.e.p at the transmitter.

(ii) The height of any antenna must not exceed 10m above ground level.

(iii) Only one antenna per band may be used (eg no slacked, bayed or colinear

CONTESTS CALENDAR

RSGB HF CONTESTS

12, 13 Mar	Commonwealth (Rules in November Issue)
3 April	Ropoco 1 (Rules in January Issue)
17 Apr	Low Power Fixed (Rules in March Issue)
15 May	Region Round-up
4, 5 Jun	NFD (IARU CW) (Rules in February Issue)
25, 26 Jun	Summer 1-8MHz
9, 10 Jul	SWL
17 Jul	Low Power FO
17 Aug	Hopscotch
28 Aug	Ropoco 2
3, 4 Sep	SSB FO
Sep-Oct	28MHz Cumulative CW
9 Oct	21/28MHz SSB
16 Oct	21MHz CW
12, 13 Nov	Second 1-8MHz
Nov-Dec	28MHz Cumulative Phone

RSGB VHF CONTESTS

5, 6 Mar	144/432MHz and SWL (Rules in January Issue)
13 Mar	70MHz Cumulative (Rules in January Issue)
27 Mar	70MHz Cumulative (Rules in January Issue)
2 Apr	50MHz Fixed (Rules in January Issue) (Note: time is 1800-2200gmt)
3 Apr	70MHz Fixed (Rules in January Issue)
9, 10 Apr	144MHz and SWL (Rules in January Issue)
17 Apr	10GHz Cumulative (Rules in January Issue)
7, 8 May	432MHz-24GHz (Rules in March Issue)
15 May	10GHz Cumulative (Rules in January Issue)
29 May	432MHz Trophy and SWL (Rules in March Issue)
12 Jun	432MHz FM (Rules in March Issue)
19 Jun	10GHz Cumulative (Rules in January Issue)
2, 3 Jul	Jubilee VHF NFD (Rules in March Issue)
10 Jul	10GHz Cumulative (Rules in January Issue)
30 Jul	144MHz Low Power and SWL
31 Jul	432MHz Low Power and SWL
7 Aug	10GHz Cumulative (Rules in January Issue)
14 Aug	1,296MHz Trophy and 2,320MHz Trophy
3, 4 Sep	144MHz Trophy/IARU VHF and SWL
11 Sept	10GHz Cumulative (Rules in January Issue)
18 Sept	70MHz Trophy and SWL
1, 2 Oct	432MHz-24GHz/IARU UHF/SHF
6 Oct	432MHz Cumulative
14 Oct	1-3/2-3GHz Cumulative
22 Oct	432MHz Cumulative
23 Oct	50MHz Trophy
30 Oct	1-3/2-3GHz Cumulative
5, 6 Nov	144MHz CW
7 Nov	432MHz Cumulative
15 Nov	1-3/2-3GHz Cumulative
23 Nov	432MHz Cumulative
1 Dec	1-3/2-3GHz Cumulative
4 Dec	144MHz Fixed and AFS and SWL
9 Dec	432MHz Cumulative
11 Dec	70MHz CW
17 Dec	1-3/2-3GHz Cumulative

OTHER CONTESTS

Jan-Dec	UBA SWL (Rules in December HF)
1 March	UBA Spring (SSB) (Rules in March HF)
5, 6 March	ARRL International DX (Phone) (Rules in February HF)
15 March	UBA Spring (CW) (Rules in March HF)
19-21 Mar	BARTG Spring RTTY (Rules from G6LZB, QTHR)
19, 20 March	Bermuda (Rules in March HF)
26, 27 March	CQWW WPX (SSB) (Rules in March HF)
2, 3 April	SP DX (Rules in March HF)
9 April	Israel 40th Anniversary International (Rules in February HF)
16, 17 Apr	Spring VHF/UHF RTTY (Rules from G6LZB, QTHR)
28, 29 May	CQWW WPX (CW) (Rules in March HF)

arrays, or switching between two or more antennas). A slot-fed Yagi or quad antenna is permitted. Dish or backfire antennas must not exceed 2m diameter.

(iv) 2-3GHz contacts will not count for points in this section.

(D) Open section: as per licence.

9. **Inspection.** All stations are subject to inspection by members of the VHF Contests Committee or nominated representatives. Should the inspector be unable to locate the site due to inadequate or incorrect information, the entry will be disallowed. In the event of a last minute change it is the responsibility of the group to make suitable arrangements for the inspector to find the site. The inspector must be given immediate access to all parts of the site with the right to stay as long as desired, and the ability to return at any time during the contest.

10. Entries

(a) All entries must be postmarked no later than 25 July 1988.

(b) Entries must be addressed to: VHF Contests Committee, c/o J H Quarmby G3XDY, 12 Chestnut Close, Rushmore St Andrew, Ipswich IP5 7ED.

11. **Awards.** The Surrey Trophy will be awarded to the overall winner of the Open section, the Arthur Watts Trophy to the overall winner of the Restricted section, the Tartan Trophy to the leading Scottish entry, and certificates will be awarded to the winners and runners-up on all bands in each section, and to the leading stations in each country.

CONTINUED ON PAGE 224

Members' Ads

The Conditions of Acceptance are published below the Member's Ad form circulated with every issue of *Radio Communication*.

The current rate is £2.30 for 40 words or less: advertisements containing more than 40 words will cost an additional £2.30 for every additional 40 or less words. Each advertisement must be accompanied by the correct remittance, either as a cheque or postal order made payable to Radio Society of Great Britain.

FOR SALE . . .

TRIO (EX LOWE) TS5205 Inc CW filter, £350 ono. Remote VFO520, £35 ono. MCSO desk mic £25. All good condx in orig. pkg. with manuals. On air demo by arrangement. Stuart, G3SNA, not OTHR. Tel: (Menchastor area) 04577-2790.

IRIO 9130 2M multimode, new condx., mobile brkt, manual, boxed. £375. LCL2740 conv for 10m, mobile brkt, manual, but no mic, £25. Pyo PFI on RB4, £5. Poul, G1HWH, OTHR. Tel: 0449-672710 (daytime), or 675908 (evenings).

HALLICRAFTERS SX62A rx. 5-108MHz vgo £120. Ilogam b/w tv camera, cosmo lens, ok etc. £35. MH144-28 cvtr, £15. Heathkit IH13U bench valve voltmeter £20. Oatong auto speech processor, £50. WANI: Welz SP200 pwr/swr meter. Hf gear, WHYI Bob, G4AFY. Tel: (Kidderminster) 0562-747480.

ICOM IC2025 2M SSB/cvtr, good condx, mic, box, etc., £110. LHM 23cm tvtr kit, built & boxed etc, requires alignment £65 ono. J-beam 2m 14-alo poreboom, £17. G6CHO, OTHR. Tel: (Beelord N. Humberdale) 026-288-330.

KW2000B WITH PSU, kw match swr bridge, and H/B otu/be/tn, £180 the lot. ARRL hl pa module 2x MRF454 100W out, £30. G4JHT, OTHR. Tel: (Nr. Southampton) 04892-B7424.

FT790R 70CM MULTIMODE cvtr, mint condx, boxed with manual, £265 ono. Bob, G1EGL, OTHR. Tel: (Wymondham, Norfolk) 0953-604019.

ORAKE TR7 111ttd with 300Hz CW filter and 1.8KHz SSB 111tar power supply, PS7 FVT external VFO servo manual. Good condx, one owner, £750. GW3ARS, OTHR.

SHARP HZ80K COMPUTER. Built in vdu, recorder, etc. plenty of radio software inc. rbt, Morse, etc. Built in PIO Inc. many 280A utilities. £50, no illers. WANTED: Oatong audio 111tar, TL122 111ner, SP120 or swap above. G0AYZ, OTHR. Tel: 0705-589560.

YAESU FT480R mint condx inc. original box, £300. G6JDB, OTHR. Tel: (Shellfield) 0742-304151.

FT757GX AS NEW, £625. FC757AT ent. tuner, £225. Top quality multiband trap dipole, £40. Yaeu mic £10 etc. £850 ono for the lot. G00TJ. Tel: (work) 01-920-3723, (home) 0206-852960.

C0100 OSCILLOSCOPE, £35. 5770R VHF revolver + spars, £50. 4-chn 2m boot mounted stereo, £30. Two hi-volts transformers, illers. Various DOVO** valves. Numerous radio magazines, again offers. Buyer collects or arrange carriage. G4EUV, OTHR. Tel: 0747-670959.

FT290R HICADS, chgr, caso/mic, headsat, mic, £245. Roy, G8VGR. Tel: 041-557-1630.

R7E HINT G/W remote control narrow CW 111tar, FM units fitted, £650. Would consider swap for TS430 or similar cash adj. as necessary. G4LTH, OTHR. Tel: 0375-674301 (evenings).

HANDHELOS, Boxed c/w chargers, manuals, batterlos. Icom IC02E, £180. IC04E, £190. Also BP30 charger and SPS test charge battery, £75. AT1 in excn. omw going dual bonder. B11T, G4TOV, OTHR. Tel: 091-4102990.

FT290R BOXED, FT790R boxed, Trio P530, Welz SP350 Waltz CH20N coax switch, Waltz TP05X power meter. Trio SP180 speaker. Yaeu YN38 mika. BN05 LPM 144-1-100 111nar. AKO.WAI wavemeter. Konpro KR500 alaveter. SMC polarphaser. Herschman 250 rotator. Trio 7800. AT1 perfect. Tel: 01-464-0593 with illers. G6XWL, not OTHR.

FT790R WITH NICADS and solt caso, 111tla used, £300. Icom IC2E with remote mic, SW antenna, and HP7 battery pack, £100. G6ANI, not OTHR. Tel: (Southampton) 0703-813344.

FT208R HANDHELD, mobile bracket, NC9C charger, case, VM24A spk/mic, manual, £100. Mizuho KX2 rx/atu, £20 ono. Dotong active ant, £30. Rapid results Home Radio Amateur Course - full course - £25 oro. G1CIA, OTHR. Tel: 061-6265597.

SCOPES: Tektronix 545A, CA plug-in, 24MHz D/BH, manual, £55. Solartron G1316 10MHz? laulty, £10. ZX81 laulty, new 16k ram, ext. keyboard, books, £8. 36t turns counters £2.50. 50W carbon realators 50/72 ohm, £1. Meters, 100UA-100MA, £2.50. G3TTC, OTHR. Tel: (Surrey) 01-391-2514.

RTTY/AMTOR terminal unit. Haplin 1UT000, fixed and variable shifts, £30. NOAA/11ros vhl satellite rx. Professionally built Haplin Kit in cabinet, £45. WANTED: Atari 520/1040 ST radio related software, your price. G1QJX, OTHR. Tel: 01-894-2507.

TRIO's FAMOUS PAIR. Sao Angus McKenzia report in Buyer's Guide to Amateur Radio. TS711E, 2m and TS811E 70cm. In lbc and never been touched Internally. TS711E, £575. TS811E, £675. G8WYT, OTHR. Tel: (Sussex) 0444-450265.

YAESU FT-DNE as new condx with all options like FM board. All 111tars, Curtile keyer, lan mod. noise blinker mod. DC lead, non-volatile memory, £1,075. Petar, G8WYT, OTHR. Tel: 0444-450265.

F1690R, £275; BN05 6m 111nar LP50-3-50, £125. Both as new. G4RSY, OTHR. Tel: 01-651-0633.

TRIO TS700G base station, 2m multimode cvtr. Good condx, £290. Tel: 0773-715694.

STANDARD C5800 25W 144-148MHz scanning m'moda cvtr; ton memorles; memory scan; frequency scan; steps 10/100Hz-1KHz; S-12.5-25KHz; last/alo search busy or free channel; rpt shift +/-; beautiful rcvr; £300. Laurence, G0A10, OTHR. Tel: 0475-87871.

TONO 5000E communications terminal, covers codes. rty. Antor ARQ modes A&L. Antor FEC mode B. Morse AF5K to tx. AF or TTI Input. Contronics o/p printer. Built in vdu and much more. £650. G8WYT, OTHR. Tel: (Sussex) 0444-450265.

TONO 550, £180. ZX spectrum, £70. Scarob terminal £40. CW audio 111tar, £5. CW tx rx software, tx Interface Spectrum, £14. Oatong FL1 audio 111tar, £35. George, G4RNU, OTHR. Tel: 0344-54848.

YAESU FT101, some mods, £210. H01 minibox 10/15/20m, £45. FT144C alg gon + 1F801A sig gens B5KHz-300KHz. The pair, £30. Vibrokey, £20 vgc. Epsen TX808 Printer beeb etc. compatible, £65. Buyer collects. Ollers. PauT, G3XAT. Tel: (Dorking) 0306-886253.

ORAKE TR7 transceiver, matching vld, atu, psu, workshop manual, illers? Yaeu FT780R 70cm multi-mode, manual, £310. Both equipments in ex-condx. and appearance. Hint used Scopex dual 25MHz scope, leads, caso, manual, £160. G3LYD, OTHR. Tel: 0983-840588.

TRIO R2000 with cw filter, £475. Hallicrafters SX24 Skyridar Dellant, £50. Cedar CR70A with preselector, speaker, £40. Eddystone 940, £100. BC221 with psu, £25. Tel/equipment 032 oscilloscope timebase u/s, £25. G4MHZ, OTHR. Tel: 0703-268705 (evenings/weekends), 0962-822401 (day).

HEATHKIT RA1, £40. KW77, £60. Labgear LG50, £20. Hevy so buyer must collect. Reluctant selo dne to lack of space. G4BZ1, OTHR. Tel: Chester 675794 (after 6 pm).

RTTY TERMINAL UNIT, Haplin TU1000, as new, illers. Power supply Lambda T3.8v 30A. Any reasonable offer accepted, buyer collects. WANTED: Yaeu FRG7700 with memory option. Must be mint condx and ideally with maintenance manual. Tel: (Canterbury) 0227-458970 (after 6 pm).

COLLINS 75A-2 ham bands rx, includes ssb, £150. Trio R600 rx, £200. Buyer collects. G8WYT, OTHR. Tel: Helvern 4968.

COMPLETE RUN RADCOM FROM Jan 66-Dec 87. Ollers. Colloction only, cash. G3VPZ, OTHR. Tel: 0903-45876.

TRIO AT250 automatic atu mint, £220. Drake 1R7 500Hz filter, £45. Collins 516F2 ronnd emblem psu, mint, £195. AEA CPl computer patch with BBC solt-wara, £120. Tel: 0247-455162.

FT708 HANDHELD, as new, boxed, £120. 48-ala 70cm J-beam, £15. Low band Westminster, £30. Sony C6 vldo, slight lout, £60. 20MB Winchester, £35. 20 character drum printer, £30. G3ZNY. Tel: 0908-562780.

TET 23M HINI-BEAM, good condx, £85. Tel: Torquay 844471.

ANTI, £120 ono. Matched pair National 6146B valves, £20, pair matched RCA 6146W valves, £28. GE 12BY7A valve, £3. WANTED: Tokyo hi-power 110L, 14MHz 111nar. Marvyn, G0BNT, OTHR. Tel: (Devon) 0752-77777.

ICOM IC720A ALL BAND TCVR, general coverago rcvr, all solid stato, 100W output, twin VFO's, PBT PS20 power supply, speaker, SMS desk mic, original total cost, £1160, mint, £625. WANTED: Drake IC111na. G4LW, OTHR. Tel: Trowbridge 3166 (anytime).

TONO 9100E, £500. Yaeu FY301 scope, £200. Hammarund H0700, £80. ICS FAX-1, £190. Epsen LX86 printer, £150. 9" green monitor, £30. IBM X1 clone, £200. G4HIB, 29 Ryde Vole Road, London, SW12 9J0.

SX400 ONE OF THE BEST scanning rx's. 26-520MHz, no gaps. Exc. condx. £350. G0GSA. Tel: (Rugby) 0788-832887.

YAESU FT23R 2M handheld, LCD display, 10 memories, acon, priority etc., brilliant 111tla set. Battery pack, charger, boxed, vgc, £175. Allco 2M cvtr, green acon display, 5/25W memories, acon, etc, super for mobile or heck. Boxed as new, £175. Tel: 051-428-6737.

FT101ZD FM MK3, £450. FDX multi 750XX, £250. Oatong D70 morso tutor, £35. 5MHz trens match, £50. FF5010X LPF, £20. Oatcon 5A psu, £30. PM2000A peak wattmeter, £35. Buyer collects. G4TOE, Tel: 0691-662128 (evenings).

FT290R, USED VERY LITTLE, original packing, casa rubber duck, £250 ono. Complete TH3JR, £200 ono, pTus carriage. Rotator KR400RC, £100 ono, plus corr. G4KYQ, not OTHR. Tel: (Cheshire) 0625-33705. CH1 also modern 3-bod det honso for aala £56,000.

JAYBEAM MINIMAX TRIBANDER beam, KR400RC with lower mast clamp, 35m UR67, 35m 6-core cable. Moving OIM forces selo, etl items only 2 months old, oIT ox condx, cost over £560, selo £390. Tel: 0474-362578.

TRIO HF 57N for sale. TS520S with spero matched PAS, SP520 speaker, DCS dig. readout, AT200 ant. tuner, etl unit matching and near mint, prefer no split £500. G4KQW. Tel: (Southport) 0704-47992.

WHY BUY NEW! FT980, keyer, FC757 outo otu band change with 980, H01 base mika, peddle, general cov. tx kit, manuals boxed, 111tla uso. Buyer inspects/collects. £1100 ono. Garr. at cost. G00XN, OTHR. Tel: 0934-862708 (oltor 6 pm please).

MY-CAIH TH3JR pTus stolte rotator co-ax baTun and cables, £150. C4FZA. Tel: (Hilton Keynes) 0908-510570.

ICOM IC27E 25W 144MHz multimode base station, £575. BN05 LPM144-3-100 111nar, £125. Welz SP10X swr/pwr meter, £20. Tokyo hy-power HRA2 144MHz weathered pra-amp, £60. Light duty rotator, £25. Tonne 13-ale, £20. lwo met 50C4 phased £30. G1LCH. Tel: 0454-773057.

TP10, 154405 with auto atr and P550. Hardly used, mint cond, £1150 ono. AM12 Antor, rcty, rw, ASC11 with all software for Commodore C64 and 154405, £150. G4HBD, OTHR. Tel: 0202-767583.

R2000 GEN COV RCVR, with VHF modrle, all rebles, DC-DC and AC, 6 months' old, unwrtd gift, still under guarantee by Lowe Electronics. Reasonable offers please or MYTY G3SGH, OTHR. Working order. Collect or carriage extra.

FDK750X 2M MULTIMODE, £300. F1690R Mk11 with 10W 11reer, little used, £425. 5A power supply, £10. Arden A5-6F speaker, £10. J-beam 05/2M antenna, £25. J-beam 4 ele 6m beam, £35. Antenne rotator, £60. Also amatarr radio magazines, books, etc. Will separate or whole lot for £850. G11WS, OTHR, (South East Essex). Tel: 0268-779484 (after 6 pm).

MICROWAVE MODULES, MH12/70 transverter (rptr shltc), £105. Tandy 100 lap held computer (Cerrtronics/RS232), bargain £135. BMC color monitor, £145. Canon AE1, erto reflex camera, £99. All mint condx. 70cm whip, £14. 51rrlar OL cassettes £1 each. Tel: (Oxford) 0865-863333.

IR10 TS4305, FM board, AM filter, £700. Trio 15811E, £800. AOR2001, £250. Phase track F1 high performance HF rx. Ionne 144/9, 432/19, plus hssresses. B & O 3000 hifi rx. Peter, G3SHI, OTHR. Tel: 051-439-6746 (after 6 pm).

RACAL SAS35 COUNTER timer, powercard 12-15v 1A, I11 Metrix clip-on ammeter voltmeter 150-600v, 10-300A. Weir Minireg 402-1 bench psu 0-30v 1.0A. Selectest millimeter, AV08, Weller soldering iron with psu. G8WTS, OTHR. Tel: 0279-34471.

IR10 TS780 2M/70CM multimode base covr. Mint condx in orig.pkg, £725. 558 meshed preamps, 2m and 70cm, £35 each. 2 x 21-ole tenre yegls with pwr splitter, £30. Buyer inspects and collects. Tel: 0212-578698.

NEC PC8201 LAP portable computer. CM05 all battery operation. RS232 Centronic printer, cassette ports Bx40 LCD screen. 64k, £125, offers considered. Mike Valartire, 240 Great North Road, Woodlands, Doncaster. Not OTHR. Tel: 0302-722450 (during day and Sat. am).

EDDYSTONE COMMUNICATIONS receiver, Model 730/4, c/w Joymatch atu. Frequency range 28-500MHz. Manufacturers operating instructions and circuit diagram. Pristine condx. C0MRH, Macclesfield. Tel: 0625-72062.

ICOM PSU30, £175. Eddystore 840C, £65. EA12, £150. Realistic 50 mm scanner, £125. Yeasu separates, FROX400, £225. Trio 9R590S, £50. Microphones Shure 526T, £40. Electrovoice 727, £20. Lora atu, £30. Vomec speech processor, £45. Tel: 01-534 3460 (evenings), 01-553-7308 (days).

SUPERB OTN. Very modern Wimpey super-warm, immac. 3-bed semi. Located between Colchester and Chelmsford, Essex. Prime village position. Large garden backing 11aids. Permission for 60' tower. Good amenities. Easy access N25. Liverpool St. one hr. £62,000. G4ICP. Tel: 0376-84478.

70CM TOKYO HY-POWER 11near HL30-U. 3W input for 30W out. Switched independent Caesat preamp, LED relative power bargraph display, £75. 70cm A1V station, HM tx, cvtr, video demodulator, mono camera, monitor, £200 or exch A1V for F1690R. G4RNI. Tel: 091-4690316.

YAESU FT1012, FC902, FV1012 and spare valves, £675 ono. VHF rotor and controller, £25 ono, slightly used. G1KSQ. Tel: 02302-3897.

N01 MINIBEAM, £75 ono. G4TLK, OTHR. Tel: (Norwich) 0603-410229.

EDDYSTONE 958/5 £150. SP430 spkr, £18. FTV107R with 6m + 2m, £260. ICOM IC24C, £95. Sony 20010, £230. ANI ert, £30. Weller solder station, £110. Exchanges MYTY WANTED: F1208, 6m module F1726. Allen, G3PYW. Tel: (Malden-Essex) 0621-52041.

HM1144/2BR serviced Dec. 87, £150. J-beam 10XY/2m as new, £30. Datong automatic RF speech processor, £30. Orac vhl nevmeter, new, £20. G08CY, OTHR. Tel: 01-949-5549.

TR10 TS1805 C/W cw 11lters, OFC end WARC bands fitted. Ex condx end even in orig pkg. Inspection welcomed. £450 (1nr crg.) G4PPQ, OTHR. Tel: (Bedford) 0767-40772.

SHACK CLEARQU1: Orac 24A psu, £120. Skyking SU4000 rotor, £55. Niersmann HIT-R0250 rotator, £20. 6-ole qrd (2m) £15. Lowe FX1 frequency absorption meter, £20. All plus post. G4PPQ, OTHR. Tel: (Bedford) 0767-40772.

TR10 1R7800 1r orig box. Well used end works well, £135 + post. Mobile (gutter) mount and 7/8ths whip £35. G4PPQ, OTHR. Tel: (Bedford) 0767-40772.

ICOM IC4E 70cm handheld with eecs and h/book,

ICOM IC4E 70cm handheld with eecs and h/book, £180 ono, or PX 1or 1rlo 158400 70cm mobile. Must be in good condx. Graham, G4NIB, OTHR. Tel: (Weybridge) 0932-851918 (weekends only).

F1101 NF 80-10 ASCO 230/12v, mint condx, manuel, £280. F7480R 2m 10w multimode, vgr, £280. G1LCI, OTHR. Tel: (Bourne End, Bucks) 26493.

F77 MOBILE HF TRCVR, 80-10 AB 15w merrel, boxed, exr wkg order, £250 ono. G1LCI, OTHR. Tel: (Bourne End, Bucks) 26493.

ICOM IC251E, 2M MULTIMODE, with mutek 11ort erd, 1rc IC-SM5 desk mic. A superb rig, £550. Irom IC2E helical case, nicad pack, 8P4 pack, mobile charging lead, ext mic, £125. Crge ext. G08ICP, OTHR. Tel: (Guernsey) 0481-47918.

SILENT KEY SALE. BR590083. Wayne Kerr unversel bridge CT492, £40. Raal RA1218, £150. Electrolr multimeter CT471, £40. Standard Telephone attenuator 74615A, 1-9008, £35. Rael RA117E, £100. Advance 1m/am sig/gen type 63A, 7.5-230MHz, £60. W0 oscillator test set, CT12 8.5KHz-32MHz, £60. Avonlncr, £5. Redifon radio swithr RSU14, £10. Thermal noise generator, CT82 15KHz-160MHz, £25. Valve voltmeter No.3 G1208, £25. Microre transister tester, £10. Microne digital probe, £7. Commodore mini computer, SR1800, £15. Redio amateur hardbook 1987, £8. Mrs Stanley. Lists. Tel: Cooden 2829.

COLOUR VIDEO CAMERA Konica Cyv303, very compact and lightweight, low consumption, exc. picture, es new condx and boxed, £185. WANTED: Yeasu FT680. Tel: 09277-63773 (evenings).

TRANSVERTER, MH1144/28. Used only six months. 10w out, any mode, £70. J-beam 6-ole qrd, twelve months ol use, £15. Buyer collects, or postage arranged. G4LLZ, OTHR. Tel: (Castletord) 0977-514048.

CIGARETTE CARDS: "How to make valve amplifier" 80V 1924. "How to make your own wireless set" BDV 1923 "How to build a two valve radio" Godfrey Phillips, 1929. "Wireless explained" Salmon Gieckstain, 1923. "Broadcasting" Ogdens, 1935. Enquiries tel: 0604-718707.

2M MULTIMODE 1CVR, FDK750E, gwo, £225. Admiralty Handbook of Wireless Telegraphy, 1938 Vol.1, £5. 25w 10m 11near, 4w 1n, £10. PEX 1100 FAX machine with paper and instructions, £35. COEFZ. Tel: (West Midlands) 05645-5802.

HEMS CLARKE 1301 special purpose VHF-UHF receiver covers 55MHz-260MHz em/1m. Continuous vfo tuning. In good condx, £80 ono. Aqerius computer, micro soft basic, printer and cassette ports, £15. G0CAD, OTHR. Tel: Dave, (Oxford) 0865-341428.

IC/R7000 RX, brand new, boxed, unopened, £795 ono. Tel: (Guildford) 0483-62586.

ICOM IC202E COMPLETE, boxed, unmodified, £120. WANTED: microwave modules, MH1296/144, 23cm trvtr. G4IYA, OTHR. Tel: (Sittingbourne) 0795-21207 (evenings/weekends).

TR10 9130 2M MULTIMODE. As new, boxed, £350. J-beam 2m collreer, £40. 6-ole quad beam 2m, £25. G1FXS, not OTHR. Tel: (Malvern) 06845-68317.

FACTORY BUILT Heathkit monitor scope, HO-10 with brand new transformer from agents which needs to be fitted. Otherwise ex condx, manuel, £40. Inspect and collect, no offers. G3RRD, OTHR. Tel: (Amberley) 045-327-2365.

ICOM ICR7000 RECEIVER, as new with lcom diacone, £700. Commodore C64 computer with C2H recorder, £50. 1541 disk drive, £70. 1525 printer, £70. Colton 9" b/w monitor, £45. All are. Tel: John, (Colchester) 0206-860238 (7-9 pm only please).

CAPCO SP3000, £180. Orac MH7 2kW meter, £60. Both are worth old. 58610 monitor scope, £40. Trio MC50 desk mtr r/w p1pters, £20. Comel speech processor £15. Datong RFA, £15. J-beam 14 PBM, £10. WANTED: Orac MH7000. G4JBM, OTHR. Tel: 0935-824225.

ICOM IC28E 2M TRANSCEIVER (picture page 893 Ger. RADCOM) As new, £265. AR2002 scanning rx mint condx, £295. Philips cr radio/cassette. Quartz 553, LCD display, 4-spkr system (speakers not inc.) £65. Carr extra, or collect. G3IME, OTHR. Tel: 0925-601485

MODEL AIRCRAFT. Futaba 5-chan radio control. Servo reverse tx/r equipment, c/w 6 servos, nicads end access, 4 gliders ready to fly, £235. p/x far radio, photography equip. cash, either way. G6XRL, OTHR. Tel: (Poynton) 0625-876192.

ORAKE TR7A 1CVR, PS7 HD psu and filters. NB both with fars, all manuals, hend mic, in vgc, £750 to include Securicor delivery. WANTED: FC102 etr, must be late model, mint condx with manuals, boxed, glve £150. G4WRLP, OTHR. Tel: 0286-3567.

BIRD 43 1M good condx end e/w 50w erd 1000w slugs for 100-250MHz, £175. Write to G6JMS, OTHR, or tel: 0905-620041.

PSU 40A 0-20V twlr meter, 240v AC Input, large heavy unit, GC AC/DC output, £60. Buyer to collect. Peter, G4VUN. Tel: (Cleveland) 0642-456327 (daytime).

IR10 15700 2M 1CVR multimode base station with 12v ferility. Good condx, £325. G6LDK, OTHR. Tel: Wakefield 270770.

TR10 120V HF Trans. 20w PEP CW 11lter, mic, etc. vgc, £275 ono. Tel: (Weymouth) 0305-813202.

TWO KT88. Used 1 hr, £15 each or ollars. 1616 heavy duty vacuum rectifiers, carbon endoes, £1 each. Two 10HF 750v oilfilled condensers, £1 each. Woden 12Hz rhahe 500HA. All postage extra. G8ML, OTHR. Tel: 0242-516094.

HF STATION, FT102 e/w CW 11lter, 1m board, mic, £470. SEM transmatch etu, £50. 8K100 bug key, £10. 10m 11r, £25. Bryer collerts, Paul, G0ACP, not OTHR. Tel: (Wymondham, Norfolk) 0953-604380.

SX200A SCANNER. Good condx. Rerently serviced by Carex, £150. G4OLH, OTHR. Tel: len, 06845-69375.

VC10 INTEGRAL VHF converter 1or R2000. Mint condx. Tel: (Chester) 0244-533051.

YAESU FT480R MULTIMODE, mint condx, very little use as base station only, c/w mobile marnt end orig. pkg. £325. G4ENC, OTHR. Tel: Dave (West Midlands) 0922-417677.

YAESU FT726R vhl/uhf multimode, £650, 1nc 2m module fitted, 70cm (needs attn) Duplex setollite urlt. Yeasu 5P102 speaker/al filter unit (matches 726), £30. Adonla AN503 base station mic (compressor rp end mod seannng), £40. Microwave module 2m 11near 50w preamp, £55. Toro 70cm 11near, 60w preamp, £95. Antenna swither units (2) 2m/70cm 'H' type, £15. Alenco EHR400 heavy duty rotator ard control unit, £60. SMC 2m/70cm dual bond antenra, £15. SMC duplexer for above, 50w, £15. J-beam, 2m 10-ole crossed yagl, £40. 70cm 12-ole crossed yagl £45. (above inc. harness and coaxial cable). Power supply (heavy duty) 7 amp, instant, £25. Contact C0C01, OTHR. Tel: (Essex) Helated 473168. Genline/urgent reason for sale. No reasonable offer refused. £1000 the lot.

HM1432/100. 100w 70cm amp, £125. 3CX800A 144MHz metalwork unit, ORV, £100. 3CX800A 144MHz amp, 1ne psu small and neat, £750. Lots panel meters, varlous values £1 each. GJ4IC0. Tel: 0534-77067.

FOX MUL1 750 2m multimode, £200. Eddyatone EC10 Mk2 with mains power pack, £60. Joystiek, VFA and Joymatch, £10. 2m 5/8 mobile whip, £10. G4QPY. Tel: (Near Retford) 077-784-560.

AM12 UN11, rcty antor cw. c/w software for pc compatiblo, £165. Iexan Kege mono computer monltor, (amber screen), £110. Yeasu FP75HD psu, £110. C0FXU. Tel: Murray, 01-581-1477 ext 257 (between 0930-1645 weekdays).

HF MODULE FOR Yeasu 726R. Surplus to requirements, £200 ono. Also went HF 8/9 band rig. WHY? G4MSH, OTHR. Tel: (Sussex) 0323-840209.

SILENT KEY SALE. Trio RS000 rx, 7 months' old with am filter, £650. Yeasu FT7700 atu, £30. G3BBR, OTHR. Tel: 0737-761794.

ORAE morse tutor, £35. 6-ole 2m beam, £10. G1HPG, OTHR. Tel: 0226-713854

TR10 430S r/w psu, £625 ono. Wrasse sstv converter SC1. As new, ery sensible offer or phone 0534-24018 (day) or 0534-24119 (evenings/weekends) and haggle.

SPECTRUM ANALYSER plugln Tectronix 500 series, with h/b, £25. Sampling oscilloscope 1GHz Tectronix modlrer, leads, h/b (timebase requires ettn), £35. RF generator, 110KHz-32MHz, £5. Audio generator, low distortion, 30Hz-30KHz, £5. BC221-AK exc ronds, calibration mains, £10. Modems, recel, V21 msins, £10. AVO MK47A, £10. XYT plotter veuum bed A3, £10. 75 Baud modems, ex GPO £5. Disk drive new 8", + data, £10. 1etrdres, YL1550, conduction cooled, sealed manufacturer's pkg, maximum disel- pation 300w, maximum 500MHz, £7.50. G8JEM. Tel: Bognor 861916.

JRC TCVR, pow/sup, £590. Oelwa 2.5kW auto/atru, £85. Xerwood 5P230 spkr+filters, £40. ANT2 el mode term/unit, £80. MBA morse, 8audot, ASC11, reader, £40. 1ranzmeteh 10-160 atu, £40. F1290 mutek F/E nicads, charger, £180. Heathkit RLC/bridge, £30. BBC '5', Cuman twin 40/80 drive, £80 second processor, Epsom RX80FT printer, microvitee colour monitor, software, £550. Weitz DC p/s 12v 6a, £25. ETMBC electronic keyer, £45. M/M 30w 144MHz amp/premp, £35. G4SHO, OTHR. Tel: 0482-42715.

BELCOM LS202E 2M multimode, h/h, boxed, salt case, nicads, chargers, etc., £225. MHL144/100S linear, £100. MHL144/100LS linear, £100. John, GUDF. Tel: 0484-722168 19 am/4 pm weekdays).

IR10 360UE 70cm handheld, with last baseband/charger, spare battery pack, speaker-mike, and salt case, £175. GHOEF, OTHR. Tel: 041-334-802.

TR10 R1000 GENERAL COVERAGE communications revr with instruction manual, vgc, £220. Martin. Tel: 0423-872997.

CAPCO SPC300 ATU, vgc, £100. Harris CB converted to metres 1m, £20. G4VVC, OTHR. Tel: 01-657-4104 (evenings only).

ICOM IC24C 2M FM transceiver. 12.5kHz channels, repeater shift, 11stn or input, 10w output, £115 ono. Remote frequency control head for above, £15 ono, or both for £120. G8XP2, OTHR. Tel: Hottling-ham 389911 (after 8 pm).

TS130S fitted 1.8kHz and 270Hz filters. Mic has Hall sound HC3 insert. VFO-240 suitable for TS130S, TS530S or TS830S. Both mint cond and rig never used mobile, £450 or with separate CM4LBE, OTHR. Tel: 0595-4270. Price includes insured postage.

HEATHKIT ET3400 micro-processor trainer with course, cassettes and components, £200. Consider part exchange 2m base station or mobile, or h1 multiband vertical antenna. Tel: 0342-822843 (evenings).

YAESU FT1 Atk. optois fitted, exc cond, £1100. PK232-6 with CBMG4 software + extras, £300. ATV transceiver, with built in monitor, £75 ono. Commodore 64 plus printer and drive, inc many discs, £275. G4MMP, OTHR. Tel: (Rotherham) 0709-554665.

MC60 HIHT, unused, surplus to requirement, £50 ono. G4VHV, OTHR. Tel: 0593-841281.

YAESU FT726 2m/70cm sat-board, speaker unit SP102, £850. Yaesu 209 hand-held, £200. G1EHW, OTHR. Both boxed, good cond.

TOSHIBA HX10 computer as raw, manuals. Exchange for frequency counter or Rane equipment RA63 asb adaptor, stu, cabinets, linear, amp or sell £75. G6XMC, OTHR. Tel: 01-462-4461.

LOOKI LOOKI LOOKI will exchange twin manual Baldwin organ with percussor and bass pedals, immac walnut Irish, 1er FRG7, RA17L in good working order. Recent disability forces disposal. Evans, Rochdale area. Tel: 0706-85-2267 (day or night).

KW1000 LINEAR AMPLIFIER, hardly used, £330. Base and mobile low band, in transceivers, new cond £275 pair. Three Westminster W30 low band, am transceivers, all working, £60. Tel: 0624-22342 (evenings).

AKAI VT110 and VT120 .25" VTRS and VC110 camera. Not working, but useful for spares or export. £50. G6ALK, OTHR.

WELZ SP400 SWR and power meter, 130-500MHz, 150w, vgc, £60. Chris, GUZJ, OTHR. Tel: 047-482-3797.

YAESU FL2100Z hi linear. Includes new bars, extra cooling fan fitted, £525. G3OLK, OTHR. Tel: 0734-776351.

PSU's PRO BUILT. Sense and current limit facilities. IC regulated. 180+ at 13.8v o/p. As new, £35. G6CYM, OTHR.

MICROWAVE MODULES, MHL144/100-S 100w, 144MHz linear amplifier, with receive preamp, £100. G3RDC, OTHR. Tel: 01-455-8831.

KEHWOOD TR7625, (25w versior of TR7600) mobile 2m fm rig. 800 channel plus memory channel. Ex cordx and perfect working order. With mobile mount, leads and handbook, £135 plus carr. Paul, G4AZC. Tel: 0843-61448.

WIBE SPACED HF variable capacitors, ideal for 2kw linear, £15 each. All spares including heads for Phillips V2000 series VTR's. New boxed valves, S763, £2.50; EF91, £1; CV287 (B40RX) £2. All corr extra. Paul, G4AZC. Tel: 0843-61448.

ATTENTION B40/62B owners. You don't need any spares now but you may later. This is the last time of advertising. Write my number on the backcase new for future reference! Everything available except valves and plugs. Paul, G4AZC. Tel: 0843-61448.

TR10 15830S, fitted YK88CH cw filter, VFO120, MC50 minophone, £700 inc. technical handbook. Dalwa AF606K active filter, £40. G3HRY, OTHR. Tel: 0908-616519 (Hampstead Pagnell).

2M MOBILE IR10 IR7730 c/w mobile mount, and 2

mins, £200 ono. 70cm mobile co-linear ES. AVO sig/gar 2-775MHz, ES. Unwin, GOFHT, 11 Carlton Rise, Melbourne, Royston, Herts. Tel: 0763-61215.

IC251E, IC251E, with mtek front end 2m base multimode in first nlss cond, £450. GDCPB, OTHR. Tel: 04246-4723 (evenings/weekends).

LINEAR MHL144/100LS 1/3w in 100w out, with preamp. As new, £105. Oscilloscope, Marconi 1F7201 OC-30MHz dual trace. 50mV-50V/cm, 50ns-500ns/cm, slide-back voltage and time measuring scales. Good working order, with manuals, £90. Mark, G6FKH, OTHR. Tel: 01-876-4379 (evenings).

FT203R PORTABLE 3.5/0.4w nicads, charger, vox, headset. Little used, boxed with handbook and case, £165. G6EMH, OTHR. Tel: (Dorset) 0929-425305.

YAESU FT2700RH dual bander, 2m/70cm 1m, 25w, boxed with diplexer, £350 ono. G4LQD, both OTHR. Tel: 0932-854393.

F173R UHF HANDHOLD, pristine cordx, £210 or would swap for IC-atu 100 with cash adjustment. VHF converter FRV7700 type F, ex cond, £35. Tel: (Gainsborough) 0427-5266.

YAESU F1225RD mtek 1/nd, £500. MHL144/100S, £85. Eddystone EC10 c/w mels and battery nlts, £55. Oragor 64 with Cumara disc drive, £200. 8-sls xy-2m beam, £20. H/brew 12-010 2L Spec, £15. G3CBW, OTHR. Tel: (Teesside) 0642-788280.

TR10 TS130S + A1130. CW filter, vgc, £500. CHOBUE, OTHR. Tel: 041-776-6084.

KW1000 HF LINEAR amplifier, good cond, boxed with manual, £330. Also Datong morse tutor, vgc £35. G6BWF, OTHR. Tel: 0940-28438.

F1290R CASE, nicads, charger, HMB1, mlt cond, boxed, £275. G6MKE. Tel: 0993-813004 (evenings and weekends).

RTTY STATION, Hal Communications model ST5000 demodulator, OS2000KS keyboard transmission reception terminal, with 12" monitor display unit. Can be seen wkg, £200 ono. G3BXI, OTHR. Tel: (Trowbridge, Wilts) 0373-830804.

P30 TOWER, 3-ale dual bander, Kenpro 600RC rotator, £300 the lot. 5-ale 4m beam, £20. Discone E15. 2-ale 6m beam, £20. 2.5KV transformer, £20. Tel: 021-353-3896.

HUTEK TVF144A 2m transverter, £169. Yaesu FV707DM scanning vfo, £80. Swinburne Electronics OR600 airband receiver, LCD readout, 5 crystal positions, and vfo. All channels are scanned, nicads, charger, £120. Tel: Rhys, 0222-394759 or 074571-2550.

YAESU FT757, mint, £590. Hatching FP757 hd psu, £160. Yaesu FT1012D MK3 WAB (used as standby rig only), immaculate, £500. FL2772 (Yaesu 2100Z) exc cordx, £590. G4VJO, OTHR. Tel: 0388-763501.

MEW TAPE, slide, synchroniser. Made by Radtronic Jersey, very professional. Mains operated. Lots of features, only £9.50 + post. C. Brown, 1 Belmont Cdns, St Helier, Jersey, G1.

ICOM 21 15-car 3w, RO-R6, 58-510, 519-523, xels for S12, REV RO, nicads, mic, shoulder strap, £70 ono. GILHW, OTHR. Tel: 0202-694322 (evenings).

YAESU FT790R, 70cm multimode portable tcvr. Brand new cond and c/w all orig pkg, accs (inc nicads, Yaesu chr) and manual. Very little use, £345. Buyer inspects and collects. G8OSA, not OTHR. Tel: 0268-755341 (Barnet, Essex).

FDX700 EX, 25w, 1m tx, £150. Yaesu FTV901R tsvtr with 2m module, £160. Boxed. Carrying case 1er standard 828 with 12v nicad battery pack and charger, £25. G3VYP. Tel: (Near Ludlow), 056-885-296.

OSCILLOSCOPE 15MHz dual trace, £95. Pye uhl mssls E39. Ditto Duplex version hb in mssls, £35. L5 1m, £25. Marconi 1054 sig/gen vhl/uhf, £75. Advance audio gen £20. Tektronix 1A4, £45. '90 £20. Some manuals. G4YVJ. Tel: (Lincs) 0507-85203.

FL2100Z HF LINEAR amplifier, brand new, never used, £570. 70w 5000E communication terminal tx/rx cw, rty, word processor, light per, £300. Heathkit 32' serial tower, self supporting, dismantled, £80. G13NZ, OTHR.

QATONG MULTIMODE FT3 filter, £90. G4NGW, OTHR. Tel: (Southend) 0772-710000.

IR10 15830S, £725. A1230, £125. Together £810 ovro good cordx, hardly used. Would consider p/ex 8m on or Sommerkamp 10m multimode, or CPC6128 computer, or vhl packet tnc. G4VYQ, OTHR. Tel: 0546-3910 (evenings).

YAESU FRG7000 hi receiver. Good cordx, £185. Can deliver south east area. G6HRC. Tel: (Worthing)

0903-830434.

AOMIRALTY HANDBOOK of w/t 1939 vols 1/2. ARRL handbook 1983. "Exman" rom for BBC computer, 18 tapes with numerous BBC computer progs. Make a sensible offer pls. p&p - remember books are heavy. Don't be mean. C3KUF, OTHR. Tel: 027-581-3648.

10KY0 HY-POWER 430MHz mast hnd prsmp, HRA7, £65. TF757GX mobile head ant mlt, £15. Yansu FL2010 amplifier, 10w for FT290, etc. £50. Alpha comm printer, £15. All plus p&p. COCAM, OTHR. Tel: 0761-451746.

TS170V, 10w, h1, £265. FT730R, 10w 1m, never used mobile, new Jan '87, £175. Solator scope, CO1400 dual beam, 15MHz, handbook, £75. Advance psu, 5v 40a, £15. Varloc 0-270v out, 10a, £35. G4ZCZ, not OTHR. Tel: (Hansfield) 0623-657553.

COMMODORE 3032 computer with green screen, basic 3 & 4 rom tool kit, rom word processor, rom printer, disk drive, 2 cassette decks, 100 plus items of software. Lots of manuals, nondx like raw, £100. Buyer collects. Tel: Rhyll 2859.

WALKER "PALACE" 6-berth luxury frame tent, three dbis bedrooms, wardrobe, kitchen area. Cotton canvas in ex cordx. Some camping accessories. Ideal for camping holidays or portable expeditions £350 ono. Costello, G3YPP, 3 Northern Avenue, Henlow, Beds, SG16 6ET. Tel: 0462-815533.

FDK RX40 VHF RX, 140-170MHz, £70 ono. vgc c/w chrgr and helical. Paraboln dish moulds for 1.8 and 1.3m petal type, offers to make spare. WANTED radio related software for Amiga. G6YRB. Tel: Skelmersdale 33499 (evenings/weekends).

TR10 15700G 2m multimode base station, with VOX box, manual. Ex cordx £280. QJME 9/45 daisywheel printer with tractor feed. Serial interface. With full service manuals, £200. C81YZ. Tel: (Hottling-ham) 0602-228103.

FT757GX11, mint, £750. FP757HD psu, £125. FC757AT auto atu, vgc, £210. Hatching homebrew transverter, 50MHz and 144MHz, 20w output, professional appearance, £100. Realistic PR031 handheld in scanner, mint, £120. ERA rty/cw reader, £75. WANTED: FT221R. G4ILO. Tel: (Colchester) 0206-210878.

COMPUTER AND MONITOR, CBM model 3032 plus CBM 3040 twin disk drive, CBM 3022 tracker printer. All in ex cond, only £250 ono. Two transverters, 144-70 and 144-284Hz. Any offers considered. Tel: 0704-880027 (after 6 pm).

TS930S WITH AU10 ATU, £950 ono. IC271E with mtek board, £500 ono. ICPS15, 20a power supply £85. 1kw pk dummy load £45. TNC220 £80. P60 versetower £350 ono. Twin paddle £100, £10. Antor rom £10. IC251E h/b £7. G3KHJ. Tel: 0923-244069.

HOSLEY MUSTANG 3-ale beam, 10-15-20m, 32' steel mast, 8-guy cables supported elements, reversible motor magalips, direction indicator, polystyrene insulated slip rings, 80' UR67 end control cable. Offers. Buyer collects. G3HRO, OTHR. Tel: 01-460-7660.

RACK MOUNTING Hammarlund SP600. Good wkg order. Perel shobby, £70. Also Rediluxor RS2, offers. Both property of deceased swl. Buyer collects. Tel: Alan, (Manchester) 061-445-7274.

KEHWOOD TS530S CW filter. Pristine cond, £560. Yaesu FL2100 80-10 linear, £150. Following nine months' elds Capco atu 300, £150. Altron 3-ale space saver, £125. AR40 rotator, £70. DL600, 600w dummy load, £45. Damsbury memory keyer, himound key, £90. Rick, G3VEC, OTHR. Prelor ring tel: 01-405-6233 (0900-1700).

FDK750E 2H MULTIMODE plus FDK P5750 matching power supply. Both boxed and in ex cond, £300 ono. G4LHV, OTHR. Tel: 0978-751328.

YAESU FT790R in orig pkg c/w nicads, rubber dunk, mic, and manual. Very good cond £270. Bob, G8RSL, OTHR. Tel: 1var 651716.

TOWER, 30' IM two bolt together sections (base section 20', top section 10'). Free standing, VERY heavy duty, with built-in ladder. Fully galvalised £50. G6KND, OTHR. Tel: 0353-778828 (buslra). 0487-842050 (home).

SILENT KEY: TS780, 2m/70cm all mode. Datong PC1 gcc. Datong dipole A0370. Datong RFA preamp. 10kyo HRA 2m masthead preamp. MGC 144v preamp. Dree wavemeter. Matsui HRA039 receiver. MGC 144/28 norverter. Mddol H5770 144/435 duplexer. Oelma CS401. Joymathn atu. Offers. Tel: 01-423-3884.

COMPLETE HF equipment, includes FT102, FC102, FV102, SP102, £850 ono. Mo splits. Also HM morse talker, £60 ono. Benos LPM144 25w, 160w, £210 ono. G4VYD, OTHR. Tel: 061-764-7623.

FT480R 2H MULTIMODE, psu, £300. PF2H, PF2B, COMPMR HBPM, xame channel, £120. Sinclair Dumi E20, Eddystone EC10, £50. CCTV cameras, £40 and £5. 3 midband xtraphones, £20. Pye bntem HBPM £35. All with data. Equipment components cheap. Tel: Bradford 617699.

CONSOLE 6"x19" £20. Rascal RA17 receiver and rf tuner, £80. 100W transmitter, £25. Proctel adapter, £75. Unused for five years. Collect or pay transport. The lot for £150. G4HXX, QTHR. Tel: 0461-38271.

ICOM IC4E, 70cm handheld. Immac condx, boxed, £175. Beercat 175XL scanner, alke immac condx and boxed, £150. Prefer buyer inspect/collects, or post at cost. Tel: Dersingham (Norfolk) 43171 (6-9pm or weekend).

SALE DUE TO QTH MOVE: FT480R 8-ele yagi retetor, cables etc. £375. FT101 Mk2, £250. Dalm CNW419, 500W PEP atu, £125. Dalm PS80M psu, £40. 1kw dummy load, £30. FRG7, £125. 2 Dalm CS201 ceex switches, £10 each. 10-15-20 vertical, £15. All vgc. C4SLG, QTHR. Tel: 0522-751920.

TRIO T58305 Inc mlke, £700. Icom 251E (no mutek) £300. Both vgc and well looked after. Microwave modules, 28MHz IF transverters, 70MHz, £70. 144MHz £60. MBM144, 144MHz gasfet preamp, £25. All vgc. BN05 L-10-180 sold state em £165. WFO meteor xctter morse memory, £35. RF scotlen 2x4CX250 c/w blower, £55. HV psu's 2.3kv/500ma with screen bles heaters metered, £50. 1.3kv/600ma with screen bias heaters metered, £30. 0-560v variable psu (400ma) £20. Valves, 4-125A (4 off) £10 each. Brand new, 4-250A, £15 each. AN15 J-Beam LW16, now £25. Tenne 17-ele, £15 (bit tatty but work fine). All above in good condx. Collection/delivery by arrangement. Richard, G4HCL, QTHR. Tel: 0625-34823 (day), 0744-895139 (evenings - net after 9pm please).

YAESU FT708, 70cms handheld c/w case, helical, charger, speaker/mic, £130 ene. G00OP, QTHR. Tel: 0272-393157.

MARCONI TV5 merline tx/rx. Helms psu, Circa 1950. Drawings, handset, cw/em (top bend cw and 80m) or collector/museum. Heath scope, £30. Heath Keyer £8. 8 & H 8mm camera, £10. TK14 R to R recorder, £20. 51g/gen, £5. C4EUK. Tel: (Brightlingsea), 020630-3071.

FRG7700 MEMORY UNIT. Purchased new May 1987, limited use. Cash sale. Buyer collects, £375. 5KR50 twin swr meter, new unused, £20. WANTED: Top bend converter 28/160 or JR310, late model with top band, ex condx, manual, circuits. G3FK, QTHR. Tel: (Farnham) 0202-873175.

NOT GOING QRT going broke. Icom IC451E, 70cm base statlen low e/put fault, apparently not o/put module, £310. Icom IC260E multimode mobile rig, pwe, £285. Feurtep 70cm ATV tx, £80. Feurtep 70cm uhf converter, £17. Trio TS130V hf tx used 8 hrs on transmit since new vgc, £325. Seny HVC3000 video camera, wired vhs c/w carry case, and psu £265. Akai VCX2E video camera, many features, with psu, £299. 25' ext cable for cameras, £10. 1kw Helgen lamp, £15. Rigid tripod, £10. Digital frequency counter never used, £80. Colour bar generators 50-860MHz, £45. Advance sig/gen B44, £35. J-beam antennax, used, good condx 88-ele, £24, 48-ele £12. 6-ele quad, 2m, £10. All nice medium duty retetor c/w lower support bracket, £45. Jehn, G6BJO. Tel: Mindhead 4046 or Borden 2774.

AOR2002 25-1300MHz, am/fm 20 memories, new, unwanted gift. Cost £486, offers around £425. Yaesu multimode scanner, 60-905MHz, £350. H/h air band scanner T-wheels, £85 ene. Two linez 19-ale tonnes, ene ek, ene good for spares. Tel: Rebin, 01-570-4422 (9.30-5pm).

2M to 432 TRANSVERTER. Will run off 290r .5W input 10 output. Multimode RPT shift with 10W attenuator 48-ele multibeam. Just back from makers. Get on 70cm 10W, all mode for £100. Tel: Gerry, 01-890-9733 (evenings/weekends).

ICOM IC2E c/w charger, IC-DCI voltage regulator, battery pack, rubber duck and xeft case, £130 ewne. Tel: 026477-3864 (evenings), or 0256-473191 Ext.355 (daytime). Ask for Mick.

TRIO 9130. Multimode, showroom condx ell accxs, sx bought, bex, handbook etc. Max been used more for 11xtening than transmitting. High power rely used, must be bargain of the year, £350. G0HTU, QTHR. Tel: Ray, Mansfield 20001.

ICOM ICR70+FH, £450 ono. CW morse key, £20. 070 morse tutor, £15. ICR70 service manual, £8. Buyers collect. G4HNN, QTHR. Tel: (Wexx) 0905-58306.

BN05 GA POWER SUPPLY. Hardly used, £40 or exchange Dateng merse tutor. G1MXX, QTHR. Tel: Portsmouth 693968.

WIRELESS WORLD 1945-1980. Redio Ref 1966-77 (1974

missing). The Gramophone 1944-75. All mint condx. Prefer sell complete collectionx. No odd copies/years. Prefer buyers collect. Sensible offerx? G3FPK, QTHR. Tel: 01-668-5582 to haggle anytime.

YAESU FT221 fitted muTek front end, £275. G0HAX, QTHR. Tel: 089272-2294 (evenings/weekends).

RA17L, £130. BN05 LPH/3/100, £120. IC-02E, £190 with soft case. All with books. G6XQ, QTHR. Tel: 0474-783190.

HEATHKIT SB220 2kW linear, £690. Trle vfe 240 for 530/830, £50. ST5HC rcty tu, £75. Dateng FL2 aude filter, £75. IRC's 35 for £10. WANTED: TL922 or L7. QHR1 or IC740. Pux/x not required. Tel: (Oxwextry) 0691-831111 (evenings).

DATONG FL3 aude filter, containing automatic whlastic filter, eparates in all modes, £90, post paid. G3RGG, QTHR. Tel: 01-455-8831.

FT1012D YAESU 12V converter and lead. Just plugs in rear. First lucky applicant with £25 secures. SAE with cheque for unlucky ones. G4AVT, QTHR. Tel: (near Wigan) 0257-62412.

CAP-CD ELECTRONICS SPC300 atu, 1kW, 3 months' eld, boxed like new, £190 ene. GARGC, QTHR. Tel: (Wexfield) 0977-519615 (day), 0924-362144 (eveningx).

SPECTRUM ANALYSER - Singer asb 50-10MHz-40MHz, vgc with manuals, £495. HP sig/gens: Rohde & Schmetz BN41004 275-2750MHz, 20mW-50W, £595. 51errre Electric 40-200MHz, 45W max, £275. Microwave counter System Donner model 6057, 20Hz-18GHz, vgc, £1250. Professional 10mW helium-neon laser with power supply, ex condx, £495. Marconl TF2300B modulation meter, £325. Seny HVC3000P colour camera, as new, £325. Seny HVR320 remote control pan/tilt head with central box, £110. National fm sweep generator, 75-110MHz, £85. Hewlett Packard microwave swr meter, type 415E, £75. Phillips mone TV camera model V100, die-cast case, zoom lens, brand new, £95. TV IF sweep/marker generator, 625/405, £35. Trio stereo test generator and encoder, £135. Marconl 6550A TFT microwave power meter, £125. G3PCN, 3 Eastcote View, Pinner, Hddx. HAS IAT. Tel: 01-866-3300.

TRIO R2000 RECEIVER c/w VC10 vhf unit and atu, £495 ene. Tel: (Rotherham) 0709-541277.

FT101 G000 CONDX matching spkr, valves, 3 months' eld, plus cm filter fitted, £250. Also FT290 2m multi tcvr, with HM 30W linear, all good workers, £250. C4HGC, Bernard Roberts, Pwllheli. Tel: 0758-612206 (eveningx).

WESTERN 40' CRANK UP tower, well mounted, £300. My-gain 10/15m 3 ele beam, £150. Appia 2E with two disc drives, various interfaces, monitor, software and Brother daisywheel printer, £750. G3MUK, Tel: (Reading) 0734-744545.

YAESU FT1012D hf transceiver, fan, mic, manual, vgc, £400 ene. G10FL. Tel: 0474-69225 (evenings and weekends).

QRT SALE: Icom R70, £400. Trio 1R9000, £260. AOR2001 scanner, £230. Dateng PC1 hf converter, £70. MHL144/1005 2m linear, £60. MHL432/50 70cm linear and homebrew 3/10W driver, £100. Dateng ASP rf processor, £60. M/modules MK2001 rcty/ascil converter, £100. Dateng A0370 active antenne, £40. Mutek BB8A500 broadband preamp, £20. 70cm 19-ele crossed tenna (new) £30. Kenpre KR500 elevation rotator (nearly new) £90. Teye T435 power meters (2-off) £25 each. Buyers to collect or pay carriage. G3PFR, QTHR. Tel: (Bradford) 0274-674396.

MARCONI CR200 vlf rx 15kHz-560kHz. Working order, some spare valves. £25. Very heavy. Buyer must collect. Two Megxip Mk11 transmitters and ene Hagslip receiver Mk11, £12 the lot, carriage extre. G3FNO, QTHR. Tel: (Essex) 0245-71604.

TS700 TRIO 144MHz multimode transceiver, vgc, £265. G8AAF. Tel: 04946-6558.

DX40, 1X, VFO, handbook, £65. CAH52 set, tx, rx, psu, atu, £180. G0EFN, QTHR. Tel: 0908-648723 (evenings).

TR2300 G000 CONDX, c/w charger, £95. 5C160 slow scan converter complete and working, £150 ene. G4GSE, QTHR. Tel: 0322-66063.

IC251E WITH MUTEK PCB, £475. IC1271 23cm multimode with ACpsu, £850. FT227RB, £125. SE600 digital 2m multimode base, £250. GKN5 colour camera, £200. 4CX250FG ex equipment £7.50. Sharp M280X with twindisk interface, printer, offers. Tel: (day) 0703-255631, (night) 0703-766016. Richard.

NATIONAL PANASONIC 32 band rx. 0.1-30MHz am/cw/ssb plus fm broadcast digital readout. 5 months' eld, surplus to requ. vgc, £200 ewno. WANTED: Dalm CN630 swr meter. G4IDE, QTHR. Tel: 0905-351568 (evenings/weekends).

HP41E PROGRAMMABLE calculator with stat peck, quadram module, time module, card reader, chemistry, high level maths, geometry solutions, manuals, xpre magnetic card, case, £165 ono. Would cost over £500 from HP. Pocket RS232 terminal keyboard, led display, £45. Acorn Archimedes IBM PC emulator software, also ISO Pascal software £69 each. Brand new and unused. Aise 65C102 turbo board for BBC master double sided with 64K ram on board, £49. Analog devices s/h hybrid ultra high speed HTC 0300. Offers. G3JBT. Tel: 0784-58696.

ICOM IC551 50MHz multimode, hardly used, Immaculata, £400. Tel: John, 0743-884822.

MICROWAVE MODULES 144/430 MHz TRANSVERTER with repeater shift plus 9-ele yagi and M89CV. Will consider split. David, Borehamood, Hertfordshire, tel: 01-207 0709 (after 7pm end weekends).

SUPERB PAIR YAESU separates FR101 21-band rx digital readout, matching FL101 tx, mint condx, and little used, c/w manuals and Yaesu hand m/c, £495. G2CJL. Tel: 0934-742326 (day), 0934-743636 (evenings).

70CM HANDHELD, Icom IC4E, boxed, c/w DNI DC peck, spkr-mic, .5 wave antenne and LC3 soft case. All vgc, £180. G6PBX, QTHR. Tel: 04446-48767.

TRIO 9130 2H MULTIMODE, boxed end in mint condx, never used mobile, £365. G4WOC, QTHR. Tel: Taunton 335091 (evenings).

TRANSVERT YOUR 2M rig into a hf band tcvr with a mutek TYNF230C 10W output. Low power atu 80 + 40H dipoles and 600 ohm feeder, £275 ene. 10A psu, £25. 15MHz counter, £15. Megger £35. B111, G4WUS, QTHR. Tel: 0287-42596.

TRIO TV502 2H transverter £90. R1000 £190. Spectrum 2.5W 6m transmit converter, £25. Microwave modules 6m converter £12. G3C10, QTHR. Tel: 01-567-6389.

70CM EME. 4-QUAD loops, harness, hardware, £120. Two 2300v 0.75A £50. Amphenol coax relay, £50. HP140 scope time domain reflectometer, £220. TF995A/2 £100. FT202 £70. HP700A pletter, £70. TF10A1B £10. Metfield LE320A1 £50. Tradipor C00 £15. Coax switch, £20. Tu QRB bits. Vase rack cabinets. £10. YF90F £14. YF90H600 £14. BP4119 £10. BP4128 £6. 240v 15a isolation £20. Qwerty k/b £15. TIL119S etc. 4m 10-ele £30. Aerial poles 14m FIJ450 £22. UR67 25p 41Y215 LF 11near, £80. Hem Redie 1979-85. RADCOM 1969-88. Offers. Much more, ring for list. G3ZYW, net QTHR. Tel: 0703-768834.

BIRD THRULINE model 43 + 50W termiline dummy load c/w 100-250/100W, 400-1000/50W elements cost £440 new, price £280 mint condx. Icom IC02E vgc c/w case, charger, spk-mic, boom headset + 2 spare battery packs, £200. FOK multi 8000 25W 2m mobile 144-148MHz synthesised, scan £130. Standard C78 70cm 1W portable, £130. Sota 2m 100W base statlen amplifier, £140. Microwave modules MHL432/30-1 1-3W 1/p 30W e/p £115. MHL433/144 converter, £5. Moslay 15m, 3-ele noneband A315, £47. 80' CUV250 LDF4-50 equivalent inc connectors, £47. Dateng rf speech clipper model RFC, £23. Oscar 430E 3x5/8 70cm mobile aerial 6.3dB, £17. Oscar 7/8 2m mobile aerial, £15. 6W monitor, £25. Circuit diagrams with most items. Buyer collects on all items or P&P extre. Brian Smith, Bridgewater, Somerset. G4EIM, net QTHR. Tel: 0278-452743.

*C*WHP FLEX1-TEN, 80-2m inc werc, £40. 5EM 160-10 tranzmach with ezltune, £80. 600MHz freq counter, £75. 3-ele TH3JNR, new, unused, £190. FU200 retetor, £38. CM9508 retetor, £50. Both with central cable. C40BS, QTHR. Tel: 072272-752 (Wllcs).

YAESU FT767GX Inc 2m end 6m modules with MD1 mic, ea new still under guarantee with boxes, £1350 only. Steve, C01JJ, QTHR. Tel: (Walsall) 0922-640861.

MICROWAVE MODULES 2-10m transverter, with 7dB attenuator. Both little used, £85. Haglin 'Hapsat' vhf weather satellite receiver with mtching aerial. Both new and unused, £55. Carry by arrangement. G3111. Tel: (Tyson) 029588-543.

QRT SALE: REASONABLE offers for: Yaesu FRG7 rcvr feystick, antenne, phones. FDK multi 700EX 2m mobile tcvr, remote mike, gutter mount, antenne, swr power meter. Heathkit dip meter. Morse key. All manuals where applicable. G4PEV. Tel: (Wilton) 0932-243616.

T0NNA 70CM SPLITTER 29270, £20. 19-ele 70cm yagis 20919, £30 pair. 9XY 2m 208T8, £20. Cushcraft ringer ARX28 2m, £20. GPV7 70cm, £20. 51m jlm 70cm, £5. Antiference broadcast vhf 2-ele £4. TV wideband (4-bowties) £6. 4 dble chimney brkts, £2 each. Chimney frame for 3 collinear £12. CBM 3032 (faulty) £20. 3040 £40, 3022 £15, detasette £3. Write Allan Reed, G8UYH, c/o Pest Restanto, Painswick Post Office, Glouc. CL6 6XH.

HUIKE TVVF 144A 2m transverter. 11m, C140PH, 01HR. Tel: 02477-58425 (evenings/weekends).

FT290, FT790, FT690 MK11, TR7850, FT708R, TH41E, 8NOS LP144-3-50 and LP4432-1-50 and OM70 2m linear amp all 1b cond with boxes, manuals, also cordless phone and Amstrad 1512 colour and 32 meg HD. C68K0. Tel: 0305-814196 (evenings/weekends).

STRUMECM VERSATOWER on trailer. 60' extended. Stored indoors, ex cond. Located Telford, Shropshire to Brian Mills. Tel: 0952-675321 (office hours), 0922-414082 (evenings).

FT290R, MOBILE MOUNT. Soft case, £235. Linear 43C 70cm cw/ssb, £95. KW Viceroy Mk111 h1 ts ssb/cw, £35. 2m HB9CV, £3. COEAC, 01HR. Tel: 04027-57606 (after 6pm).

COMPLETE STATION. Heathkit S6102 tcvr (fully valved + set unused replacements). Power supply, monitorscope, v/voltmeter + HF probe, dummy load, manuals, Shure mike. Key. SEM Z-match, Edomator (waveform), C4M4 minilbeam + rotator, £400. Jayetick antenna, jaymatch, £10. G32NX. Tel: 10evon 03954-2300.

KR600RC ROTATOR, £120. S-solo h1 antenna TETH35C £100. FT1010Z 9-band 1m mic, £485. FC902, £88. Katsumi message keyer MK1024 £150. 480R 143-148, £325 ono. QTH Detached bungalow, 4 beds, lgo gdn, FT2000 ono. 2m 100W amplifier USA, £100. Tel: 051-327-4280.

PYE F402 FIXED stations (3). Hb 1m 30W AC240V 6-chan. 2 mint & boxed. 1 asc on 2m. Inc manuals, oillers? Delivery at cost. G6GHS, not 01HR. Might swap WHY? Tel: 0249-650878 (evenings).

804 H0WES MODULES 5 units. Only rx lwr wires attached. All var caps mounted. Screened enclosures in main case. H1n1 coax, cable, switches, knobs etc. Parts cost £120, accept £70 for collection. Illness prevents completion. G8K1, Surrey. Tel: 093-23-47331.

LADDER FILTERS 8.913MHz or 9.063MHz with circuit. Covers 80m and 40m with one vfo. Eight HC18-U crystals (two for usb and lsb). Can be soldered into 0.1" veroboard, £5 inc p&p. G4H400, 01HR.

ICOM 751A hf transceiver fitted CR64. High stability 111ter and RC10 remote controller, with Icom AT500 automatic antenna tuner unit, used receive only, 8 months' old, mint cond, cost £2080, oillers around £1500. Trlo 4405 built in atc, fitted 1.8KHz narrow sub 111ter, used receive only 6 months' old, cost £7340, oillers around £1000. Tena thota 5000E, rty/ant/rsc11/morse, terminal unit, built in 5" vdc, with keyboard, 2 hrs used receive only, mint, £750 ono. Trlo 9130 2m multi mode with mobile bracket, mic, boxed, vce £350. FRG3600 Withera Mk3 scanning receiver, 100KHz-950KHz. Mint £400 ono. Dressler ARAS00 active antenna for scanner 14dB gain. Cost £139. Bosed unused. £90. BNOS 11near 2m amplifier, T44-10-180 unused, £275. Oatong AHF mint, £50. Hamgear pms tuner, mains-battery, unused, £60. YH48 mic with keypad, £75. Minolta 7000 al camera 11.7 lens, with 2800af flash, used once. Cost £440, sell £300. Hb dealers. G6SFD, 01HR. Tel: (Oronfield) 0246-473413 (evenings/weekends).

COLLINS KMM1 TCVR, collectors item, superb cond complete and working, £300. Psu £100. Extra crystals and spare set of valves inc pair matched 6146A's, £100. SH3 mic £80. Bob Ralph, G4XSG, 01HR. Tel: (Birmingham) 021-743-7979.

MSX WORK PROCESSOR software, cartridge or cassette eg msx-text, taword, kuma for max computer. SALE: Bosed Ixas T199/4A 16k computer, tech man, books. Hardly used, unwanted gift, £35 (p&p ea). Tel: Ray, 0254-831605 (Lancs) alter 7pm.

BARGAIN SALE. SEM transmatch £90. Wetz swr/pwr meter (2 range) SP220 £50. Wetz 500W dummy load, C1530 £25. All mint. G4GHC, 01HR. Tel: 0803-37050.

YAESU FT708R, £165. FT208R, £155. Both hardly used and ex cond. Free ap/mic to first buyer. Also, serial/parallel printer, home use only, £30. Buyer collects or pays p&p. G4HHC, 01HR Burgess Hill, Sussex. Tel: 04446-43505.

FT790 70CM MULTIMODE, vce based, c/w mika, 11es1-wp, £270 cash. Sale inc homebrew linear. G1RVE, 01HR. Tel: (East Sussex) 07914-88145. Buyer collects.

SHACK CLEARANCE - Marcon 100 valve double diversity receiver, HRI7 circa 1970 with manuals; laboratory Spectrum analyser; AVO electronic test set; for luit details and other equipment send lge ssc to G3JMK, H4 Over Hall Drive, Winsford, Cheshire, CW7 7ET.

REDIFON R800 TALLBOY minicomputer with hard disk, two vdu's, Centronics printer and manuals. Oillers over £250. Proceeds to RAIBC. Beyer collects from London. G4YLT, 01HR. Tel: 0245-321171.

TR7200C 10W FM CRYSTALLED R07, S11, 12, 16 20-23. Eac mobile rig, £70. Chrls, C4KKK, not 01HR. Tel: 0865-890461 (evenings).

FT290R MK1, 2.0 A/H nicads, strap, case, charger, boxed, manual, good cond. Kit built linear to suit, 20W, with preamp, £270. Will split. WAM1CO: 10m fm rig, around £40. C8CM1. Tel: (Walsall) 0922-413958.

DRAE MORSE TU10R £20. Commodore computer, 3032, double disk drive, 3040. Computer incorporates monitor, manuals, diagrams, etc. £350. Telequip-ment scope, 43R (dual trace). Working needs looking at £20. Piersan KE93 (American) mobile receiver (h1) with powerpack, £20. Tel: 0373-812158.

IR10 15780 DUAL BANDER 2m/70cm, £690. Collection/delivery by arrangement. G61PQ, 01HR. Tel: 061-633-3895.

ICOM IC75T HF TX/RX, 250W cw 111ters £995 ono. Kenwood T1922 hf 2kW linear amp inc spare pair 3-500Z valves, £875 ono. TAU 5PC3000 3kW roller coaster atu £175 ono. Philips CD304 CD player £149 ono. Olympus OHN 50cm/11.8 £730 ono. Vivitar (OM) 75-205mm zoom £45 ono. G4MVX, 01HR. Tel: Bruce, 06286-64415.

ICOM IC271E 2M BASE, fitted with muTek front end. Mint cond £575 ono, or will consider swap with Yaesu FT230R. (With cash adjustment). G4URM, not 01HR. Tel: 0245-468149 (alter 7pm or weekends). Essex.

SHACK CLEARANCE, Yaesu FTONE, FT757, FC707, FC700, Trlo 15711E. Pya pocketlone P5004, mobile chgr, R3, S20, S18, S16, PF2 S20 S18 S8 fitted. All open to offers or ps scanners AR2002, 9600, WHY? G4UAP, 01HR. Tel: (Stanford) 0780-53089 (alter 7pm).

TRANSVERTERS, microwave modules HMT432/285, £T00, HMT144/28 £80. Icom IC245E 2m mobile mc1mode, £160. AR40 retaber £50. G3Z55, not 01HR. Tel: 0932-63552 (evenings).

YAESU FT201 TRANSCEIVER hf, £250. Yaesu Y0844A microphone, £15. XDX 2m FM2016A/E transceiver £100. Maida 2m/70cm dualband antenna cw H5770 duplexer, £37. C4L10, 01HR. Tel: 0705-373320.

ARAK 5/8 COLINEAR mode? SUS2850 5-6d8 gain c/w pole clamps, £15. 50' coas fitted lemala "N" connector both ends marked "502V". Es Icom AH7000 discone. Unused, £15. G3RDC, 01HR. Tel: 01-455-8831.

ICOM IC2025 ssb/cw 2m portable, £100 ono, vce c/w case, manual, 5 stals, accessories. Bosed. G3Z01, 01HR. Tel: (Reading) 0734-332777.

FT726R, 2/70/SAI mint, boxed, with all manuals, £850. Preler buyer collects but will dispatch at cost. MHL432/50 still under warranty, £100. Maplin TU1000 rty terminal unit, aligned, working, with circuit, £30. G1VCY, 01HR. Tel: (Essex) 0268-753508.

WANTED . . .

IC2025 + 8877 or 4CXT000A + base, also 40' telescopic, tilt ever mast and 60' LD550 + connectors and propeller pitch motor. Conrad, G6ZTU, 01HR. Tel: 0226-791196.

"THE MORSE TALKER" (MMS1) required for RAE student. Could possibly collect Yorks/Lancs, or you post. Coin, tel: (Kelghiey, Yorks) 0535-273891.

ENTHUSIASM WANTED ORP tcvr kit required, micon, Omega, QSB80 etc. Unfinished or faulty welcomed, but must be complete. Condition immaterial, my soldering is even worse! Terry, G4Y50, 01HR, or 'phone daughter on 0865-341166 and I will return your call.

YAESU FC102 ATU. Must be as new, boxed with all info and unmarked. Top price paid for right one. Could exchange + cash. 6 mths old Trlo AT230 atu or sell £165. G4WRLP, 01HR. Tel: 0286-3567 (eves).

HIGH IMPEDANCE Microphone settable for valve transmitter. Components/information to construct G20AF Mk3 transmitter. Manual/circuit diagram for Solatron coilless scope CD514 scope. Julian, G3XWL, 01HR. Tel: 0622-691239.

HANDBOOK OR SERVICE sheet to buy or borrow for Trlo TS7005. Martin Rowland, G4YUA, 01HR. Tel: 0993-71688.

GENERAL COVERAGE receiver required. Must be in

11rst class condition. Please ring Lymington 73294 (near Bournemouth).

CIRCUIT DIAGRAMS or handbook for: Standard radio, receiver unit 3-LRU-132A, your price paid. 027YV, Finn Hoffmann, Elkaervej 5, Lavon, 8600 Silkeborg, Denmark.

TWO VALVES type DCC90 - new or good secondhand, and a reasonable offer for my as-min CDU150 0/B scope, working but not in calibration. Will consider exchange for good 5/8 70MHz example. G4EAB, 01HR. Tel: (Wolverhampton) 090-722-2349.

EDDYSTONE 6-pin baseboard callholders. Eddystone All World Two receiver. Any pre-war shortwave receivers, Polo Scott, BTS, Promira, WHY? Also pre-war shortwave components, literature kit built receivers. CAH2E, 01HR. Tel: 0703-268705 (evenings/weekends), 0962-822401 (day).

CLEAR OUT YOUR LOFT! Philips 580A 1935 vintage mains radio. Wanted in any condition even cabinet or chassis only. Pure nostalgia for old timer. Not a collector but will pay your price. Contact Roy, G0EWC, 01HR. Tel: Bristol 776891.

DRAKE 'C' LINE RAC, T4C, etc. L7 11near, MN2700 or MH438 or MH439 atu, 7077 mic. WHY? Will part exchange TS9405 with built-in atu. CAH18, 29 Ryde Vale Road, London SW12 9JQ.

TOVER 3-SECTION BOX LATTICE tilt over 33' mas, 10m with winch. G4URH. Tel: Ken, 01-595-1480.

HP435 OR 436 POWER METER less head, or with u/s head. Facility unit OK. Can offer cash or complete working HP432A + 478A in exchange. FOR SALE: HP1815A TR/ampmeter plug-in for HP180 series scopes. John, G8BXH, tel: 01-428-0974.

EARLY WIRELESS & XTAL sets wanted; particularly WMT equipment or parts, early valves, horn speakers, old radio books, magazines, catalogues, pre-war television. Keen collector pays well for anything associated with early wireless. James, C4ERU, 5 Luthar Road, Winton, Bournemouth. Tel: 0202-510400.

DRAKE L7 LINEAR amp and psu, Drake MN2700 atu, top price paid. Urgently required. Tel: 0602-609345 (anytime).

HP106, HP107, HPT17 + handbooks, in good cond. G3FOQ. Mr DeTaney, Halls Lane, Norton, Sullat, IP37 3LG. Tel: 0359-30336 (alter 8 pm).

F1707 and FC707 atu, together or separately. G0FR0, 01HR. Tel: (Abingdon) 0235-832871.

MAINS TRANSFORMER for valve 11nos; at least 500v at 1 amp, or two 250v isolation transformers. C401C, 01HR. Tel: 0883-43838.

COOR T28 or similar translator, top band receiver. Tel: 01-486-4376.

SCANNING RECEIVER WANTED for general coverage vhl and uhl. Anything considered, faulty or working, for middle aged widow turned swl. Must be cheap! c/o Derek, G4WFLR. Tel: 0633-856237.

YAESU FCT02 ATU, must be in mint cond, unmarked, boxed, with all info, late model only. Will pay £750 for right one. Hsy esch, Trlo A1230 etc. 7 months' old, es new, or ae11 £160. G4WRLP, 01HR. Tel: 0286-3567 (evenings).

SAVE A PANDA. Mains transformer for Panda cub, Elstons M79 or equivalent. Complete transmitter 11 mels transformer OK. Please help! G8DEP, 01HR. Tel: (Wigan) 0942-38844 (after 6pm).

EDDYSTONE BAND-spread condenser and slow motion dial catalogue 1043. Also Eddystone Brown, three hole mounting, British 5 and 7 pin valve holders. May have alternates for exchange. G4HMT, 01HR. Tel: Bath 891254.

YAESU POWER amplifiers FL2010, and FL7070 ler Jim, C4LWY, 01HR. Tel: 0925-76-2485.

KN2000, 2000A or 'B'. Almost any cnds OK. Contact Martin, tel: 01-773-2983 (evenings).

F1225RD WITH mutek front end, Wanted for Rugby Amateur Transmitting Society Club Station. Cash melting for right beast. Can collect. John, G4EPA. Tel: 0788-822750.

WARTIME SUITCASE TYPE radios. A Mk3 (B2 minor), MkT23, or any other clandestine and resistance type radio, inc. modern for collection. Any cnds welcome. Manuals and access, ere el Interest G4GFD, 01HR. Tel: 01-949-2317.

STUDIO AND BROADCAST equipment for hospital radio use. Meters, carts, grams, mics and jackfields, etc., surplus or s/h but must be of professional quality. Martin, G4VZD, 01HR. Tel: 0384-271963 (evenings) or 0384-287477 (daytime).

TELESCOPIC TOWER, tower, versatower, etc. at a reasonable price. Can collect, post not important. Also FC102 atu wanted. RS48336. Tel: (Peterborough) 0733-303071.

SHURE 526T MIC. Must be in mint condx. Marc, G13YDH. Tel: Bellast 795783.

WIND UP 30-40" MAST. GMYF, OTHR (Blackpool). Tel: 0253-56811 (after 6 pm).

SONY 2001D RECEIVER. SONY 2001D receiver. Tel: (Nottingham) 0602-301674.

DISK DRIVE for MSX computer with accessories. SH220 Trio station monitor. SW200A Trio swr/power meter for hf bands. HC10 digital world clock. Pair 572B/7160 valves. SP820 Trio speaker. Howard, G0H2H. Tel: 0394-460-474.

ICOM IC202 or similar type of ssb and cw 2m tcvr. Home built equipment accepted if in full working order. Larry, G0H1R. Tel: (Tamworth) 0827-898024 (anytime).

KW E-ZEE match etc. Please write. G001C, Dick Fixter, 18 Nibley Drive, Boston, Lincs. stating condx and price.

EXTERNAL VFO for Tole 1R7200C, good condx. G4VEF, OTHR. Tel: 0270-663453.

IR751E 2M MULTIH00E. Hutek masthead amp. Amplifier valve type or homebrew 2m. E13CCB, G1HR. Tel: 066-41373.

ICOM FILTER, FL53A or FL52A or p/ex for FL63. Also required, Lewy AP12 airband receiver. Gell tad, G4H4LK en 0292-41737 NOT QTHR.

LONELY DRAKE R4C seeks matw TAx er /C etc. TR4C tcvr considered. 1296 antennas 23/55 elements or similar. 70cm amplifier ene er tne 4CX250 WHY? Bird thru-line with 1kw 70cm element. Richard, G4H4L. Tel: 0625-34823 (day), 0744-895139 (evenings - not at home please).

DRAKE MN2700 also L7, CS7, SP75, CW75, 1800Hz filter. Cash sold. Will collect any distance; will consider complete systems. G4JBM, OTHR. Tel: 0935-624225.

EOYSTONE 940: Will pay reasonable price for receiver in good condx, preferably from SE England so that I can collect. CBAMJ, OTHR. Tel: 0603-738440 (evenings).

0603-738440 (evenings).

YAESU FTV901R with 70cm, 2m and 6m transverter units. FV101DM or FV901DM vlt's. FL2100Z linear. FR700 psu. F1V700 transverter. G4AJE. Tel: (Cambs) 0354-740441.

MARCONI WAVEMETERS: 1026/1,2,3 & 4. Any condx, also ICOM 202. FOR SALE: 9cm, 13cm, 23cm cavities Sandown Park, May 1st. G3VVB. Tel: 072684-2368. OTHR.

YAESU FL101 with or without matching FR101. Preferably pristine (for display station). Also 2m/6m lm boards for FR101S. Also fully equipped FR101S/D/DO etc. Also pristine FT101 any mark. All to good home. Tel: 0789-841285.

G2DAF or G3PDM type rx designs need not be working, but mostly complete. CARVU, OTHR. Tel: 0332-72259.

1ENF0 2004A 70CM LINEAR. Tel: 021-456-1941.

2182KHz MARINE WATCHKEEPING receiver wanted. Single fixed frequency type, normally muted until distress channel active. Any unit considered, details to BRS68004, Felixstowe, Suffolk. Tel: 0394-272096.

PLEASE - CIRCUIT DIAGRAM and service data for 101er model 31A oscilloscope. Plug-in units for Telenic SM2000 sweeper. G2H2CJ, OTHR. Tel: 0766-7706370.

YAESU FC700 ATU, or similar. Argonaut tcvr. Also vertical hf antenna. Tole/Yaesu, similar, tcvr recent model. G2CYN. Tel: 01-935-7119 (days).

100W+ 2M LINEAR wanted. Valve or transistor, homebrew or commercial. G6PCA, OTHR. Tel: (Chelmsford) 0245-76106.

R1116 and R1082, up to £150 offered for either or these ex-RAF receivers. Olck, G6DIK. Tel: 0227-764000 Ext 3245 (daytime).

AS LIGHT AS POSSIBLE tcvr. For h/p backpacking cw/ssb multiband, or 80m. Prefer minimum 40W. Consider poor condx, damaged, dropped, scratched, but must be cheap as may attempt to lighten further! Write G4YSS, OTHR please or tel: 0723-863137 (evenings/weekends).

COMMODORE 500/600/700 programme reference guide. Will stat copy and return with usual

reimbursement. Any information re programming would be welcome, and paid for. Double or single disk drive 3030/4040 or similar. IEEE488 cables. Epson LX100 printer. G4I2W. Tel: 0226-20786.

YAESU FT1012D MK3 with fm facility and any accessories. Must be in ex mkg condx and c/w manual. Best offer secures up to £450 cash. Contact Phil, G6B0D, OTHR. Tel: 0784-56169 (evenings) 093276-2065 (daytime).

12v SOLID STATE aircraft vhl tx/rx (such as Narco COM11A) and/or any navigation receivers. G6MBV, not OTHR. Tel: 0706-216564.

70cm MODULE FOR FTV901R. G4H2X, OTHR. Tel: Marle, 0671-2190 (daytime), 2268 (evenings).

ELECTRONIQUE 1.6MHz IF transformers for G2DAF (valve) receiver. Also helicopter small valve transmitter and S73 rcvr. Any condition if complete and unmodified. HR0, Hine coll packs mint, £65. R1196, £35. G0011 Fewie, RS90218. Tel: (Breadsteins) 0202-698142.

B2 ANCILLARIES: spares box, key, power leads, phones. Also steel container for psu and spares box to complete rebuild. Also wanted 121 or 122 set and original user handbook for 128 set. Letters only. Maj Kemp, 4 Armd Wksp, BFPO 41.

WORKSHOP MANUAL FOR FOK multi 750XX. G30VL, OTHR.

KW2000A MECHANICAL FILTER type HK455-10CK. Please write Brierley, c/o 46 Ardgowan Road, Lenden, SE6 1UU.

CIRCUIT OR SERVICE manual for Olablo Mk1 printer as used in Renk Xerox 800 word processor. Borrow for copy or buy. Brian Hodgson, G3YKB, OTHR. Tel: (Dunstable) 0252-221665.

WANTED FOR COLLINS TCS tx mains psu, or the 16-pin socket psu connector, type Cannon SK23C. Tel: 0255-435700.

OLYMPIC L/B AM RF unit AT27605. Sony C9 infra-red remote control. Opus discavary '1' disc drive for Spectrum. G8TJ. Tel: (Devon) 0626-68187 (evenings).

POWER TRANSFORMER for MW2 AR88 receiver. Advertiser will pay transportation. Tel: (Stevenage) 0438-353636 (any time).

CONTEST NEWS - CONTINUED FROM PAGE 218

Low Power Contest 1988 rules

Please note: Changes to rules 3, 5, 8 and 11 have been made in order to encourage QRP activity.

1. The general rules for RSCB HF Contests, as published in "Contest News", *Rad Com* January 1988, will apply.
2. Date and time. 0700-1100gmt, Sunday 17 April 1988.
3. Sections. (a) 10W rf output maximum. (b) 3W output maximum. RSCB members resident in the British Isles. Single-operator stations only.
4. Frequencies. 3.510-3.560kHz and 7.010-7.040kHz. (IARU Region 1 contest-preferred segments). CW only.
5. Exchange. RST and serial number starting at 001, plus output power (eg 579001 3W).
6. Scoring. 15 points for each completed contact with another QRP station. Five points for all other contacts. Points may be claimed for contacts made with stations on both bands and outside the UK.
7. Documentation. Standard RSCB hf contest log sheets (HFC1 Rev79) should be used. Duplicates must be clearly marked without claim for points. Unmarked duplicates will be penalised at the rate of 10 times number of points claimed plus the claimed score. Logs containing more than five unmarked duplicates, for which points have been claimed, would normally result in disqualification. Each entry must be accompanied by a cover sheet (HFC2 Rev80) or a standard RSCB declaration signed by the operator responsible for the entry.
8. Equipment. The transmitter or outboard power amplifier stage should not be capable of rf power output in excess of 15W.
9. Address for entries. Logs should be sent to: "HF Contests Committee", c/o Mrs H Claytons-Smith, G4JKS, 115 Marshalswick Lane, St Albans, Herts AL1 4UU.
10. Date for entries. Logs must be post marked not later than 15 days after the end of the contest.
11. Awards. The 1930 Committee Cup will be awarded to the leading station in section (b). Certificates of merit will be sent to the first three stations in each section and to the highest placed entrant using a completely homemade station.

IARU/RSCB 432MHz-24GHz Contest results - erratum

The VHF Contest Committee apologises for an error which appeared in the results published in *Rad Com*, January, page 64.

In the 432MHz Single Operator table, the callsign in position 3 should have been G6YLW, not G6YLS. Apologies to both callsign holders.

432MHz-24GHz Contest rules

1400-1400gmt, 7/8 May 1988

The general rules published in "Contest News", *Rad Com* January 1988, will apply. There will be two sections, Section S for single-operator stations using the same callsign on all bands, and Section M for multi-operator stations which may operate all bands concurrently using different callsigns. Scoring will be by the radial ring system on 432MHz and 1-3GHz, and at 1pt/km on all other bands. Half points may be claimed for crossband contacts. Individual band and overall tables will be published.

All entries and check logs to: VHF Contests Committee, c/o A J Colell, G4NBS, 10 Quince Road, The Limes, Herdwick, Cambridge CB3 7XJ.

432MHz Trophy and SWL Contest rules

0900-1700gmt 29 May 1988

The general rules published in "Contest News", *Rad Com* January 1988, will apply. There will be three sections, Section F for single-operator fixed stations, Section O for other stations and Section L for listeners. The 1951 Council Cup will be awarded to the station with the highest overall score in the contest.

All entries and check logs to: VHF Contests Committee, c/o T Malvin, CM8MJV, 2 Dudley Avenue South, Edinburgh EH6 4HH.

432MHz FM Contest rules

0800-1200gmt 12 June 1988


This contest is under review due to lack of support in 1987. If you wish this event to continue, please be active and send in an entry.

The UK band plan should be adhered to, so recommended working frequencies are in the ranges 432.5-432.8MHz and 433.4-433.575MHz. The general rules published in "Contest News", *Rad Com* January 1988, will apply. There will be two sections, Section F for single-operator fixed stations, and Section O for other stations. Entrants may transmit only F3E (FM) and contact only other stations using this mode. County multipliers will be used (general rule 14).

All entries and check logs to: VHF Contests Committee, c/o D J Robinson, C4FRE, 15 Ferry Lane, Cavendish Park, Felixstowe, Suffolk IP11 8UR.

R. N. Electronics

Professionally designed equipment for Amateurs
6 METRE Linear TRANSVERTER

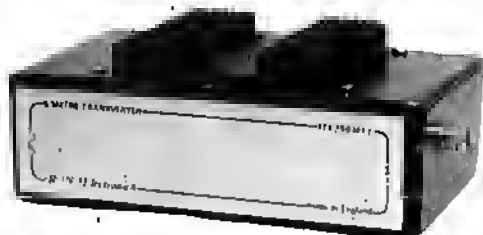

Allows any popular 2 Metre Transceiver (up to 3W) to be used on 6 Metres any mode (SSB, FM, CW, Packet)

- ★ Low harmonic output ★ DC or RF switching ★
- ★ Low noise BF981 front end ★

Boxed versions supplied with either PL259 or BNC plug to 2 metre transceiver

- 25W pep o/p complete boxed transverter **£172** + 400 p&p
- 2W pep o/p complete boxed transverter **£135** + 400 p&p
- 2W pep o/p assembled and tested P.C.B. **£105** + 200 p&p
- 25W pep o/p add on P.C.B. **£47** + 200 p&p
- 7dB Switched Attenuator 10W Input **£22** + 200 p&p
- 25W P.A. complete, boxed, 2-3W drive including LPF, 4 or 6 metre version **£75** + 400 p&p
- ★ 4 metre boxed transverter 145/70 Mhz **£243.00**
- ★ 0.5-3W drive, 25W p.e.p. output + 400 p&p

ALL PRICES INCLUDE V.A.T.

37 Long Ridings Ave, Hutton, Brentwood.
Essex CM13 1EE. Tel: 0277 214406


Quality MORSE KEY KITS

from
R.A. KENT ENGINEERS

Leading British manufacturers of top quality morse keys in kit form, renowned throughout the world for their outstanding performance and reliability.

SOLID BRASS MORSE KEY KIT

Our well known Standard Morse Key Kit is machined from solid brass, using ball race bearings, silver contacts and fine pitched screw threads to provide a key of outstanding quality. Available as a complete kit or machine parts only requiring a base ... complete



TWIN PADDLE MORSE KEY KIT

Our Twin Paddle Morse Key Kit is also machined from solid brass and uses ball race bearings with fine pitched screw threads and the solid steel base gives outstanding stability in use



ELECTRONIC KEYS KIT

The Electronic Keyer Kit is supplied with an assembled and tested printed circuit board, together with a steel case and 400V 11 provides remote operation for squeeze keying at speeds of 5-40 w.p.m. with fully adjustable side tone. Alternatively, the assembled PCB, together with the three control potentiometers, is available to enable the constructor to finish



Please send large SAE for further details to:

KENT

R. A. KENT (ENGINEERS)
243 Carr Lane, Taileston, Preston, Lancs. PR4 6YB
Telephone: Hesketh Bank (07721) 814988


NEVADA

HIGH QUALITY BRITISH MADE PRODUCTS

TM1000 TRANSMATCH

1KW All Band ATU

For Coax/LW Feed
Incorporates our unique wide band roller coaster



£139 + £5 p+p

TM1000B £165 + £5 p+p

Fitted with 2KW Balun

TM1000 Kit Form £115 + £5 p+p

BUILD YOUR OWN HIGH POWER ATU

WITH OUR RANGE OF ATU COMPONENTS

- RC26 Roller Coaster 1KW 30uH **£24** + £1 p+p
- TC250 250 pF Var. Capacitor 1KW **£19.95** + £1 p+p
- TC500 250 + 250 pF Ganged Variable 1KW, **£28.00** + £2 p+p
- TC48 Turns counter for RC26 **£12.95** + £1 p+p
- Pre-drilled empty case for above **£26.00** + £3 p+p



U.H.F. REMOTE ANTENNA SWITCH

(For masthead mounting)

Freq: DC - 1.2 Ghz
Power: 300W P.E.P.
Insertion Loss: 0.19 dB at 900Mhz
Connectors: Green Par 'N' Type

£49.95

ALLOWS SELECTION OF 2 ANTENNAS FROM 1 COAX FEEDER

H.F. REMOTE ANTENNA SWITCH

(For masthead mounting)

Now you can switch between two HF Antennas on one coax feeder.

Freq: DC - 185 Mhz
RF Power: 1KW P.E.P.
Insertion Loss: 0.15 dB at 144Mhz
Connectors: SO239

£39.95

50 Mhz LINEAR AMPLIFIER

WITH HARMONIC FILTER



SPECIFICATIONS

Supply: 13 V DC
Input Power: 2-5 Watts
Output Power: 15 Watts
Freq: 50-52 Mhz
Power Gain: Approx 8dB

£29.95

+ £1 p+p

29Mhz FM R.F. POWER AMPLIFIER


WITH HARMONIC FILTER

SPECIFICATIONS

Supply: 13 V DC
Input Power: 1-4 Watts
Output Power: 25-30 Watts
ONE YEAR GUARANTEE

£24.95

+ £1 p+p



USE YOUR CREDIT CARD FOR IMMEDIATE DESPATCH

HOTLINE (0705) 662145

NEVADA COMMUNICATIONS
189 London Road, North End,
Portsmouth PO2 9AE. Telex: 869107

C.M. HOWES COMMUNICATIONS

Eydon, Daventry,
Northants NN11 6PT
(mail order only)
Phone: 0327 60178

NEW! 2M and 6M CONVERTER KITS

If you have a receiver that covers the 20M amateur band, you can use it to monitor the 2 and 6 Meter bands by adding the new **HOWES CV220** and **CV620** frequency converter kits to your station. Suitable for use with our popular **DcRx20** receiver kit. These new converters can also be used with any general coverage communications receiver (no modifications to the receiver are involved, they simply connect externally to the antenna socket).

An excellent constructional project could combine these two new kits, together with one of our **DcRx20** SSB/CW receiver kits. This will give a great little monitor receiver covering three of the DX chasers most favoured bands. A really cost effective way of enjoying the "weak signal mode" DX on 2 and 6 meters, together with the most popular HF DX band.

CV220 or CV620 kit: £17.50 Assembled PCB module: £23.90

HOWES FINISHED EQUIPMENT RANGE

HC266 2M to 6M transverter. 10W RF output with ALC, VSWR protection and very low harmonics. Case specially manufactured to high standards by computer controlled machine tools. 1 to 5W drive level standard. 5 to 10W drive available as a no cost option. Operators handbook includes block and schematic diagrams. **HC246** 4M output version may be available by the time you read this. Price including post and VAT: **£179.90**, normally available off the shelf from us, and from selected retailers.

HOWES KIT RANGE includes:

DcRx20	DcRx40, DcRx80, DcRx160 SSB CW Receivers
CTX40	CTX80 ORP CW Transmitters for 40 and 80M
MTX20	10W CW TX for 20M
CVF20	CVF40, CVF80 VFOs for above transmitters
HC220	HC280 21J to HF transverters, 10W output
CSL4	Dual bandwidth SSB CW filter for DcRx
ASL5	Dual bandwidth filter for "black boxes"
TRF3	Shortwave Broadcast receiver
CTU30	HF bands ATU for receiving or 30W TX
SWB30	SWR Relative power indicator, 160 to 2M
CM2	Quality microphone with VOGAD
AP3	Automatic Speech Processor
ST2	Sine-wave side-tone/practice oscillator
XM1	Crystal Calibrator with 8 marker intervals

KIT Assembled PCB

£15.90	£28.90
£13.40	£19.40
£21.90	£27.70
£9.90	£15.90
£52.50	£83.50
£9.90	£15.90
£14.90	£22.50
£14.50	£19.90
£24.90	£29.90
£11.90	£16.50
£11.20	£15.20
£15.90	£22.60
£8.60	£12.90
£16.80	£21.90

All **HOWES KITS** include a high quality glass-fibre PCB with screen printed parts locations, full instructions and all board mounted components. Tuning capacitors to suit our receivers and VFOs (except 160M) are available at £1.50 extra (DcRx needs two, TRF3 and CVF need one).

A copy of our free catalogue and information sheets on any products you are interested in available for an SAE.

Please add 90p P&P for kit orders.

UK delivery is normally within 7 days.

73 from Dave G4KQH,
Technical Manager.




HELPING TO BUILD YOUR STATION



CAP CO ELECTRONICS LTD
63 Hallcroft, Birch Green
Skelmersdale, Lancs
WN8 6QB
Tel: 0695 27948

Stay Tuned Forever with a CAPCo ATU -
Once Bought - Never Replaced

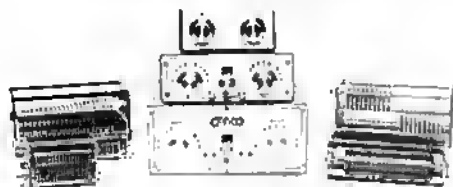

ANTENNA TUNING UNITS

SPC-3000 1Kw p.p.p.	£225.00
SPC-3000 3Kw p.p.p.	£325.00
NEW PRODUCT - VHF ATU	
SPC-100 1Kw p.p.p.	£59.95 + £2 p&p

CAPACITORS

CAP-255 S.GANG 250 pfd	£15.50
CAP-257 T.GANG 250 pfd	£18.95
CAP-105 S.GANG 500 pfd	£21.95
CAP-250 OFF 500 pfd	£18.95
8Kv 2.5mm plate spacing + 2.00 p&p	
CAP-315 S.GANG 250 pfd	£17.95
CAP-317 T.GANG 250 pfd	£22.95
CAP-125 S.GANG 1200 pfd	£25.95
12Kv 4.5mm plate spacing + 2.50 p&p	
ROLLER COASTER 28 micro henries	£22.95 + 2.00 p&p
BALUNS 4:1 Fully encapsulated	£16.50 + 2.00 p&p
AERIAL KIT Clip-on Spreaders	£5.30 + 1.00 p&p
URNS COUNTER Digital	£22.50 + 1.00 p&p


CAPCO are proud to announce THE GENUINE MAGNETIC LOOP ANTENNA - A RARE TECHNOLOGICAL BREAKTHROUGH

The Magnetic Loop Aerial is totally different from any other aerial. It relies solely on the magnetic portion of the electromagnetic wave to operate. It filters out all unwanted noise via 180° phase shift between the magnetic and electrical wave, exactly what is required from 1 to 14 Mhz where the electrical noise is virtually unbearable.

Depending on the model used and within the bounds of the frequency designated for that model, the Control Box enables the user to operate the antenna from the lowest to the highest part of the frequency with no gaps. There are various models of loops - typically 2 antennas and 1 Control Box is required to cover the whole HF frequency range from 1 to 30 mcs. A reduction of £100.00 is allowed for two aerials. Prices range from £79.95 for the receiving loop to £456.00. Power ratings for these versions are from 100-200 watts.

The Commercial versions, power rating 500 and 1000 watts come complete with Automatic Controller which selects frequency required.

PLEASE WRITE INCLUDING SAE FOR FURTHER DETAILS INFORMATION.



RECEIVE ONLY LOOP



TRANSCIVING LOOP

- It has a very high Q
- A radiation resistance of 0.003 of an ohm, never more than 800 milli ohms.
- Has a bandwidth from 3Khz to 50Khz.
- It has an SWR of 1.4 to 1 at the very least, 1.1 to 1 on most bands.
- Will operate at virtually ground level.
- The loop has a vertically polarised radiation pattern containing both very high and very low angle radiation (ideal as a DX antenna).
- Does not require an Antenna Tuning Unit.
- Depending on the model used, it only occupies from 80cm to 4m of space.
- It is ultra compact, light and waterproof.
- Planning permission is not necessary.

Our equipment is guaranteed, unique and as such protected by registered designs and copyright. Our policy is one of continual research and improvement therefore current specifications are subject to change without notice.

VALVES

VALVES

VALVES

The following valves in matched pairs 6JS6/C, 6KD5, 6JB6/A, 6L06, 6HF5, 6I46A, 6I46B. YES the 6JS6/C is Japanese and works in the FT101. Most amateur radio valves including difficult to obtain types EX STOCK. Quotations without obligation. If we don't stock your type we may be able to import for you, PLEASE ENQUIRE, REMEMBER over 200 types EX STOCK. See for list. Phone for assistance re types suitable for your equipment, USA and Jap manufacture of popular types available.

DON'T DELAY PHONE TODAY 045 75 6114, G4AZM

Wilson, Pael Cottage, Lees Road, Mossley, Tameside, Manchester

PLEASE REMEMBER

The Advertisers appreciate knowing where you saw their advertisement.

Tell them you saw it in

RADIO COMMUNICATION

TX-3 RTTY/CW/ASCII TRANSCEIVE

The high performance, low cost system

Split-screen, type-ahead operation, receive screen unwrap, 24 large memories, clock, review store, callsign capture, RTTY auto CR/LF, CW software filtering and much more. Needs interface or T.U.

BBC-B/Master and **CBM64** tape £20, disc £22. **SPECTRUM** tape £35, + 3 disc £37 inc. adapter board (needs interface/T.U. also).

For **VIC20** we have our RTTY/CW transceive program. Tape £20.

RX-4RTTY/CW/SSTV/AMTOR RECEIVE

This is still a best-selling program and it's easy to see why. Superb performance on 4 modes, switch modes at a keypress to catch all the action. Text and picture store with dump to screen, printer or tape/disc. An essential piece of software for trawling the bands. Needs interface. **BBC-B/Master**, **CBM64** tape £25, disc £27. **VIC20** tape £25. **SPECTRUM** tape £40, + 3 disc £42 inc. adapter board (needs interface also). The **SPECTRUM** software-only version (input to EAR socket) is still available £25, + 3 disc £27.

TIF1 INTERFACE Perfect for TX3 and RX4, it has 2-stage RTTY and CW filters and computer noise reduction for excellent reception. Transmit outputs for MIC, PTT and KEY. Kit £15 (assembled PCB + cables, connectors) or ready-made £25, boxed with all connections. Extra MIC leads for extra rigs £3 each. State rigs(s).

WORLD AND UK/EUROPE MAP LOCATOR

Maps, great circles, distances, bearings, contest scores. Lat/long, locators, NGR, hundreds of placenames. **BBC-B/Master**, **ELECTRON** only. Tape £10.

LOCATOR Distances, bearings, contest scores. Lat/long, locators. **SPECTRUM**, **CBM64**, **VIC20** tape £7.

And for **BBC-B/Master**, **SPECTRUM**, **ELECTRON**, **CBM64**, **VIC20**.

MORSE TUTOR 1-40 wpm. Learn by ear, practise using random letters, figures, punctuation, words. 40 plain language texts supplied or type your own. With learning guide, tape £6.

LOGBOOK Date, band, mode, call and remarks. Instant callsearch. Log printout. Tape £8.

RAE MATHS Unlimited practice and testing for the exam calculations. Tape £9.

All **BBC** and **CBM64** programs are available on **DISC** at £2 extra.

Prices include VAT and p&p, 1st Class inland, airmail overseas, normally by return. Eire, C.I., BFPO deduct 13%.

technical software



Fron, Upper Llandwrog, Caernarfon LL54 7RF.

Tel: 0286 881886



NEVADA

THE UK's SCANNER SPECIALISTS

NEW MODELS AND
LOWEST PRICES FROM

UNIDEN
Beaconet

MODEL BC 50 XL

Handheld scanning receiver
with 10 memories.
Covers 66-88MHz,
136-174MHz, 405-512MHz

£99⁹⁹

MODEL 100 XL HAND HELD

Scanner with 16 channels
memory scan covering
66-88 Mhz, 118-174 Mhz,
405-512 Mhz.
Super sensitive receiver

£199⁹⁹

MODEL 70 XLT

New pocket size scanner
with 10 memories. Covers
66-88 Mhz, 118-174 Mhz,
405-512 Mhz

£229

BLACK JAGUAR POCKET SCANNER

Switchable AM/FM.
Covers CB plus the following
frequencies 26-30MHz, 60-88MHz,
210-260MHz, 410-520MHz.
ONLY

£225

SCANNING ANTENNAS CTE DISCONE WIDEBAND ANTENNA

Receiver: 70-700 Mhz
Transmit: 70-500 Mhz
Power: 500W
8 Element High Quality

£26

MODEL 175 XL BASE

Scanning receiver with 16 channel
memory scan covering: 66-88MHz,
118-174 Mhz, 405-512 MHz.

NEW LOW PRICE

£189⁹⁹

SSE DISCONE

RX ANTENNA
70 - 500 Mhz
With 3 Elements

£24⁹⁵

SEND FOR OUR BUMPER CATALOGUES
OF AMATEUR, CB, SCANNING EQPT.
ONLY £2 (Includes a £2 voucher)

USE YOUR CREDIT CARD FOR IMMEDIATE DESPATCH

HOTLINE (0705) 662145

NEVADA COMMUNICATIONS

189 London Road, North End,
Portsmouth PO2 9AE. Telex: 869107

QUARTZ CRYSTALS
QuartzLab MARKETING LTD
 P.O. Box 19 Erith Kent DA8 1LH
 Telephone: 01-318 4419
 24Hr Ansafone:
 Dartford (0322) 330830
 Telex: 8813271 GECOMS—G
 (Attention QUARTSLAB)
 An SAE with all enquiries please
 PRICES NOW INCLUDE VAT

STOCK CRYSTALS
CRYSTALS FOR 2 METRES
 HC25 £2.70 FOR ONE CRYSTAL £2.50 EACH FOR 2 OR MORE
TX CRYSTALS 12MHz 30 & 40pF
RX CRYSTALS 44MHz Series Res. 1415MHz 30pF Scanner Crystals (399 crystals £3.45)
 HC25 £2.70 FOR ONE CRYSTAL £2.50 EACH FOR 2 OR MORE
TX CRYSTALS 4 & 8MHz 30pF
RX CRYSTALS 44MHz Series Res. 1415MHz 30pF Scanner Crystals (399 crystals £3.45)
 4 METRE CRYSTALS 10R 7026 IN HC25-U AT 12.80 each
 1X 8 78250 RX 28 78000
 70CM CRYSTALS £6.50 per £3.30 each
 1 for Pwt P51 P52 & P53 series Wood & Douglas and 1 DA MULTI U11
 SUB (433 21 SU20 R80 RB1 RB2 RB3 RB4 RB5 RB6 RB8 RB10 RB11
 RB13 RB14 RB15 ALSO for MULTI U11 ONLY SUBS S1718
CONVERTER CRYSTALS IN HC18/19 AT £3.30 each
 22 000, 38 666, 42 000, 95 000, 101 000, 101 500, 105 666, 116 000
FREQUENCY STANDARDS £3.20 each
 HC6-U 1000kHz 10 000MHz
 HC18-U 1000kHz 7 000MHz 10 700MHz 49 000MHz 100 000MHz
TUNING I.F. & MPU CRYSTALS IN HC18 £2.60 each
 7 168MHz I.F. for 1750 Hz tone, 10 745 kHz 10 711 F1
 3 2148 4 000 5 0688 10 2400 14 3180 15 00000
YAESU CRYSTALS for FT101a FT101 & at £14.50 each
 Many available at stock £14.50 is available on request use send SAE
 Full list available on request, please send SAE
 PRICES NOW INCLUDE VAT

MADE TO ORDER CRYSTALS
FUNDAMENTALS
FREQUENCY RANGE **PRICE**
 1 TO 1.5MHz £12.40
 1.5 TO 2.0MHz £5.90
 2.0 TO 6.0MHz £5.50
 6 TO 21MHz £5.25
 21 TO 25MHz £7.50
OVERTONES
FREQUENCY RANGE **PRICE**
 3rd OVT 21.00 TO 65.00MHz £5.25
 5th OVT 60.00 TO 110.00MHz £5.90
 5th OVT 110.00 TO 125.00MHz £8.60
 7th OVT 125.00 TO 175.00MHz £11.60
DELIVERY
 2.0 TO 175.0MHz 2 weeks approx
 1 TO 1.499MHz 3 to 4 weeks
 Unless otherwise requested fundamentals will be supplied for 30pF load capacitance and overtones for series resonant operation.
HC18/19 PLEASE SPECIFY WITHIN ORDER RING else HC25/U supplied for XTAL above 3MHz
HC6/U & HC33/U 1MHz-175MHz HC18/U & HC25/U 2-175MHz
HC17 Add £0.50 HC45 Add £3.75
DISCOUNTS Price on application for 100+ units to same frequency/spec or bulk purchase of mixed frequencies
COMMERCIAL CRYSTALS available on test delivery and at competitive prices
 Please send for list of testing instructions
EMERGENCY SERVICE for XTALs 1 to 175MHz Add the surcharge for each XTAL Days refer to working days 4 days + £12, 5 days + £7, 8 days + £5, 12 days + £3
CRYSTALS SOCKETS HC25/T 25 pin HC18/30 pin MINIMUM ORDER CHARGE £1.50 unless ordered with crystals
TERMS Cash with order post inc. to UK & Ireland Cheques & PO's to OSI LTD
 PRICES NOW INCLUDE VAT

Choose from the Comprehensive Range of KENWOOD quality Communications Equipment



TS-440S
 HF Transceiver with Gen Cov Receiver. All modes included £1138

KENWOOD ACCESSORIES

Low pass filters
 Headphones

Microphones for
 Fixed and Mobile



TRANSCIVERS
RECEIVERS
HANDHELDS
MOBILES

HF • VHF • UHF

2 METRE 25W MULTIMODE



Howes Kits
NEW 2M/6M
 kits for 1988
NEW SWR/POWER
METER



ALSO
70CMS HANDHELDS
 ★ ICS ★
 ★ Packet ★
 ★ & Fax ★

Daiwa Quality Products
VHF Linears
Power Supplies

NEW HF RIG



★ KENT ★
'KENT' Morse Keys & Keyers

WARD ELECTRONICS
 422 BROMFORD LANE, WARD END
 BIRMINGHAM B6 2RX Tel: 021-328 6070
 CLOSED MONDAY


FREQUENCY METERS • MET • MICROWAVE MODULES • KEYS • ROTATORS • SWR METERS • PSUs • ANTENNAS • RSGB BOOKS •

Morse Tutor

Learning morse with D70 is fast and painless. And you can "do it anywhere" because D70 is built to travel and the battery lasts for months. Field proven by thousands of users.

Price: £56.35 Inc. VAT

To order simply dial
0532 744822
 or write with cheque or postal order to



FREE GIFT
 "The Secret of Learning Morse Code" by Mark Francis—when you purchase a Datong Morse Tutor!
VALUE £5
 DON'T DELAY, place your order now and we will send you your morse tutor and the FREE GIFT. Immediate delivery. This offer applies while stocks last.



Dept. RC Datong Electronics Ltd. Clayton Wood Close, West Park, Leeds LS16 6QE

Access/Barclaycard welcome—Fast delivery service
 Catalogue and data sheets on any product available free on request. Dial 0532 744822 (2 lines)



SITUATED AT SOUTHERN END OF M23—EASY ACCESS TO M25 AND SOUTH LONDON

HF RECEIVERS		£	(c&p)
Low	HF 125	375.00	(—)
Icom	IC R71	825.00	(—)
Kenwood	R2000	595.00	(—)
Kenwood	VC10 VHF Converter	161.94	12.00
Kenwood	R5000	875.00	(—)
Yaesu	FRG 8800	639.00	(—)
Yaesu	FRV 8800 VHF Converter	100.00	12.00

HF TRANSCEIVERS		£	(c&p)
Kenwood	TS 840S	1995.00	(—)
Kenwood	TS 930S	1695.00	(—)
Kenwood	TS 440S	1138.81	(—)
Kenwood	TS 140S	5862.00	(—)
Kenwood	TS 830S	1098.00	(—)
Kenwood	TS 630SP	748.00	(—)
Yaesu	FT 980	1795.00	(—)
Yaesu	FT 757GX II	949.00	(—)
Yaesu	FT 767GX	1550.00	(—)
Icom	IC 735	949.00	(—)
Icom	IC 751A	1465.00	(—)

VHF SCANNING RECEIVERS		£	(c&p)
Icom	IC R7000	957.00	(—)
Yaesu	FRG 9800M 60-950MHz	509.00	(—)
AOR	AR 2002	487.30	(—)
Signal	RS35 "Airband"	249.00	(—)

VHF HANDHELD RECEIVERS		£	(c&p)
ICOM	RX 40 141-179 MHz FM	132.25	12.00
Signal	RS37S "Airband"	68.51	12.00
Sony	Ali 7	249.00	(—)
Sony	PRO-80 Receiver AM/FM/SSB 116KHz-223MHz	349.00	(—)

ANTENNA TUNER UNITS		£	(c&p)
Yaesu	FRT 7700 Short wave listening	59.00	12.00
Yaesu	FC 757AT	349.00	(—)
Kenwood	AT 230	208.57	12.50
Kenwood	AT 250 auto	366.00	(—)

2M TRANSCEIVERS		£	(c&p)
Kenwood	TH 205F Handheld	215.26	(—)
Kenwood	TH 215E Handheld	252.13	(—)
Kenwood	TH 21F Handheld	189.00	(—)
Kenwood	TR 751E 25w multi-mode	599.00	(—)
Kenwood	TS 711F base station	940.00	(—)
Kenwood	TM 221ES 45w FM Mobile	317.30	(—)
Kenwood	TH-25E Handheld NEW MODEL	258.00	(—)
Yaesu	FT 211RH 45w FM Mobile	309.00	(—)
Yaesu	FT 200R II multi-mode	429.00	(—)
Yaesu	FT23R Handheld - FN B10	253.00	(—)
Icom	IC 2E Handheld	225.00	(—)
Icom	IC 02E Handheld	269.00	(—)
Icom	IC 28E 25w mobile	359.00	(—)
Icom	IC 275E base station	1039.00	(—)
Icom	IC 3200E 2M/70cm FM mobile	556.00	(—)
Icom	Micro 2 Handheld	239.00	(—)

70cm TRANSCEIVERS		£	(c&p)
Kenwood	TH 41F Handheld	218.00	(—)
Kenwood	TS 811E base station	1095.00	(—)
Kenwood	TH 405E Handheld	273.18	(—)
Kenwood	TH 415E Handheld	298.85	(—)
Yaesu	70cm module for FT 726R	349.00	(—)
Yaesu	FT 73R Handheld - FN B10	283.50	(—)
Icom	IC 4F Handheld	285.00	(—)
Icom	IC 04E Handheld	299.00	(—)
Icom	IC 475E base station	1125.00	(—)
Icom	IC 48E FM Mobile 25w	449.00	(—)

STOP PRESS
Reduced Price Kenwood TW-4100E
FM Dual Band £499.00

GOODS NORMALLY DESPATCHED WITHIN 24 HRS. - PRICES CORRECT AT TIME OF GOING TO PRESS - E&OE

MAIL ORDER & RETAIL

APPROVED KENWOOD DEALER

STATION ACCESSORIES		£	(c&p)
MC 50	Desk Microphone	46.08	12.00
MC 60A	Desk Microphone with Pre-amp	88.22	12.00
IAC 55	Mobile Microphone with Control Box	52.67	11.00
MC 35S	Hand Microphone 4 pin	21.72	11.00
MC 40S	up/down Hand Microphone 6 pin	19.07	11.00
MC 43S	up/down Hand Microphone 8 pin	22.22	11.00
SMC 30	Speaker Microphone TH21	28.31	11.00
LF 30A	Low Pass Filter 1kW	32.26	12.00
SP 40	Mobile Speaker	21.06	11.00
HS 7	Miniature Headphones	15.80	11.00
YH77	Light de Luxe Headphones	19.99	11.00
HS 5	Deluxe Headphones	37.54	11.00
HMC 1	Headset with Voi TH21 etc	32.91	11.00
VS 1	Voice Synthesizer Module	32.26	11.00
GC5	ICOM World Clock	43.00	12.00
CD600	CW and RTTY De-Coder	215.14	12.50
KPC2	Kantronics Packet Communicator	165.00	12.50
Ken	Morse Key Kits	29.50	12.50
Ken	Twin paddle Morse Key Kits	38.50	12.50


ANTENNA BITS		£	(c&p)
HI O Balun 1:1 SWR PEP		13.95	11.00
Bicomm Balun 4:1 1kW		11.20	11.00
Bicomm 7.1MHz Epoxy Traps 1pair		9.95	11.50
Sell Amalgamating Tape 10M x 25mm		4.25	10.75
T piece polyprop Dipole centre		1.60	10.25
Small ceramic egg insulators		0.65	10.20
Large ceramic egg insulators		0.85	10.20

CABLES ETC.		£	(c&p)
URV 67 low loss coax 50 ohm per metre		0.75	10.25
UR 76 50 ohm coax dia 5mm per metre		0.30	10.10
UR 70 70 ohm coax per metre		0.35	10.10
UR 95 50 ohm coax dia 2.3mm per metre		0.40	10.10
4mm Polyester Guy Rope 1400kg per metre		0.25	10.10
50mils 16 swg head drawn copper wire		6.95	11.50
75 ohm Twin Feeder Light Duty per metre		0.20	10.10
300 ohm Slotted Ribbon Cable per metre		0.32	10.10

WE ALWAYS STOCK A GOOD SELECTION OF FREQUENCY REFERENCE COCKS

GAREX THE SCANNER SPECIALISTS

JIL SX-400 THE PROFESSIONAL SCANNER



- Basic coverage 26-520MHz
- AM, NFM & WFM
- Expandable from 100kHz to 1.4GHz with SSB and CW
- Computer control options
- IF output terminals
- Specifications set by professionals

£649


AOR 2002 THE WIDE RANGE SCANNER



- Covers: 25-550MHz, 800MHz-1.3GHz
- AM & NFM & WFM on all bands
- Computer interface socket
- 20 memories
- Compact size
- 12V dc operation
- Up/down step control knob

£487

REVCO RS-3000 THE COMPACT SCANNER



- Size only 6" x 2" x 8"
- Covers: 26-32MHz, 60-90MHz, 118-180MHz, 380-514MHz.
- AM & NFM all bands.
- Liquid crystal display.
- 50 memories.
- Scan, search, priority

£199

REGENCY HX-850E THE SMALLER HANDY-SCANNER



- Covers: 75-106MHz or 60-90MHz plus 118-175MHz, 406-496MHz
- AM & NFM programmable on all bands
- Full scan & search functions are available
- 20 memories
- Measures only 2.5" x 5.5" x 2"
- Nicads, charger & BNC whip antenna included in the price

£279

JIL SX-200N THE SUPERIOR SCANNER



- The choice of the professionals
- Proven reliability
- Covers: 26-88MHz, 108-180MHz, 380-514MHz
- AM & NFM on all bands
- Positive action keyboard
- 16 memories
- 12V dc & 240V ac

£325

DON'T FORGET THE ANTENNA!

All receivers need a good antenna and the BRITISH-MADE REVCON is used throughout the world by discerning scanner owners. Covers 50-500MHz, extremely well made & excellent value at... **£31.95**

For those who will appreciate extra performance we offer the REVCO RADAC dipole nest with transmitting capability from 25-500MHz... **£69.95**



BROADBAND PREAMPLIFIERS

REVCO PA3 inline masthead model, with special mains psu DC-1GHz min 13dB gain... **£49.95**

PA3 instrument or back-of-set version for 12V DC operation, BNC connectors (SO239 or N-type options)... **£35.50**

GAREX ELECTRONICS

MAIN DISTRIBUTOR OF REVCO PRODUCTS. PRICES INCLUDE UK P&P and 15% VAT. Ask for details of our interest free credit.

HARROW HOUSE, AKEMAN STREET, TRING HP23 6AA.
Phone Tring (044282) 8580 & Cheddington (0296) 668684. Callers by appointment only.
Ask for our secondhand scanner bargain list.

**FAX NOW
AVAILABLE
FOR KAM AND KPC2**

AMDAT

**FOR THE BEST RANGE
OF
PACKET RADIO EQUIPMENT**



NEW PAC-COMM TINY 2 £99 + £2.50 pp

KANTRONICS KAM £269 + £3 pp
KANTRONICS all mode CW/RTTY/ASCII/AMTOR/PACKET. Simultaneous HF and VHF Packet Connects & Digipeating. software also allows a Gateway between ports.

PAC-COMM TNC 220£139 (kit) £149 (built)
TNC includes a single chip modem which is software switchable between two radio ports supporting both VHF and HF packet operation.

KANTRONICS KPC 2 £159 + £3 pp
TNC provides Software Switchable Tones for VHF and HF operation. Includes the Kantronics Personal Mailbox.

PAC-COMM PC-110 £159 + £2.50 pp
Plug-in card for PC-clones switchable between HF and VHF tones

**SERIAL INTERFACES NOW AVAILABLE FOR
AMSTRAO 464, 664, 6128**
Ideal for TNC connection

All our other products still available
Ring for details or
SEE US AT BARRY AND LEEOS

AMDAT Crofters, Harry Stoke Road
Stoke Gifford, Bristol BS12 6QH
(0272) 699352/559398



HEATHERLITE PRODUCTS

(A British Business manufacturing British Products)

phone 0482 871762 after hours 0964 550921 or call in



2M/70cm EXPLORER



HF EXPLORER

EXPLORER VALVE AMPLIFIERS

Quality British engineering, hand built in our workshops. Cabinets are in a quality hard baked beige epoxy finish. Front panel in dark brown gloss with cream lettering. internal PSU and full metering and fully guaranteed.

70cm Explorer, 4CX250B, drive 10 watts, O/P 400 watts PEP, £585
2M Explorer, 4CX250B, drive 10 watts, O/P 550 watts PEP, £535
HF Explorer, 2x3-500Z, drive 100 watts, O/P 1Kw RMS
... Amateur Bands 80, 40, 20, 15, 10 £1050
... Commercial Bands as requested POA
Single band valve amps to spec. requested, 10 watts drive POA
Carriage and insurance on amps. £15

MOBILE MICROPHONES plugged and ready to use for sale driving
Complete with control box, mic gain control, PTT, LED on TX.
with scan buttons. £26.00 without scan buttons... £24.00
add £3 for single earphone add £10 for fitted tone unit
FOR HAND PORTABLES. Type SW: mic, earphone, sw box, jacks £15.50
MIC only £7.50, comes with circuit, MIC & EARPHONE only £10.50
"please state rig" p&p add £1.50 per order



**Heatherlite Products, 1 Beverley Business Centre,
St. Nicholas Road, Beverley, North Humberside HU17 0QN**

Manufacturers of Mobile Microphones and Valve Amplifiers

BRAND NEW COMPONENTS BY RETURN OF POST

VAT Inclusive Postage 20p if over £5. List Free
HIGH STABILITY MINIATURE FILM RESISTORS 5% Tolerance
1W E24 Series 0-51R 10MO 1p 175p/100 one value 0-125W E12 Series 10R to 1M 2p
0-5W E24 Series 1R to 10MO 1p 1-0W E12 Series 4R7 to 10MO. 5p
1W metal film 10R to 1MO 5% E12 series 2p 1% E24 series 3p
Multilayer or equivalent Subminiature Ceramic Plate capacitors 100V E12 Series
2% 1-8pF to 47pF 3p 2% 56pF to 330pF 4p 10% 390pF to 4700pF 4p
Plate Ceramic Capacitors 50V working for vertical mounting
E12 Series from 22pF to 1000pF then E6 series 1k 5pF to 47k pF. 2p 0-100pF 3p
Miniature Polyester capacitors 250V working for vertical mounting
0.1, .015, .022, .033, .047, .068 4p. 0-10 (100V, 250V) 5p. 0-15 6p. 0-22 (100V, 250V) 6p.
0-33 8p. 0-47 (100V, 160V, 250V) 8p. 1-0 15p. 1-5 20p. 2-2 22p
ELECTROLYTICS Wire Ended IMfds/Volts
47/50 5p 10/150 5p 47/16 6p 100/25 7p 220/25 8p 470/40 16p
1-0/50 5p 22/16 6p 47/25 8p 100/50 8p 220/50 10p 1000/15 15p
2-2/50 5p 22/25 6p 47/50 6p 150/16 7p 470/16 11p 1000/25 18p
4-7/50 5p 22/50 6p 100/16 7p 220/16 8p 470/25 11p 1000/35 22p
TAG ENDED CANS: 5000/30V £1.00 4700/16 25p, 4700/25V axial 70p.
TANTALUM BEAD ELECTROLYTICS Subminiature vertical Mounting IMfds/Volts
0-1/35 14p 2-2/35 15p 15/16 20p 22/16 30p 47/16 80p
0-22/35 14p 4-7/6 14p 15/25 35p 22/25 35p 68/3 30p
0-47/35 14p 4-7/25 15p 22/16 20p 33/10 30p 100/3 35p
1-0/35 14p 10/25 20p 22/10 25p 47-6 30p 220/16 £1.20
POLYSTYRENE Capacitors 63V working E12 Series Long Axial Wires
10pF to 820pF 3p 1kpf to 10kpf 4p 12kpf 5p
TRANSISTORS
BC107/8/9 12p BC547/8/9 8p BC183, 183L 10p BF195/7 10p BFX88 25p
BC147/8/9 10p BC557/58/9 8p BC212L 10p BFY50/51/52 20p BSX195/20 15p
BC167/8/9 10p BC182L, 184L 10p BCY70 15p 2N3055 50p BD1356 25p
B pin i.c.s. 741 20p 555 22p Holders 8 pin 8p 14 pin 12p 16 pin 14p 28 pin 25p 40 pin 40p
DIODES (p.i.v./amps)
75/25mA 1N4148 2p 800/1A 1N4006 6p 400/3A 1N5404 14p 115/15mA OA91 6p
100/1A 1N4002 4p 1000/1A 1N4007 7p 80/1-5a 51M1 5p 100/1A Bridge 25p
400/1A 1N4004 5p 1250/1A BY127 10p 50/1A 1N4001 3p 30/150mA AA143 8p
Zener Diodes E24 series 400mW, 3V3 to 33V to 33V Bp. 1 watt 3V9 to 33V 12p.
LEDs Red, Green, Yellow 3 & 5mm, 10p, 8mm, 35p, Grommets 3 & 5mm, 2p
Fuses 20mm glass 100mA to 5A. D Blow 5p A/Surge 8p. Holders 8p, 1p.c. or chassis
High speed p.c.b. drills 0-8, 1-0, 1-3, 1-5, & 2mm 30p 12V Drilling machines £5.50
The C.R. Supply Co. 127 Chesterfield Rd, Sheffield S8 0RN. Tel: 557771

EX-WD COMMUNICATIONS RECEIVERS

We now have stocks of ex ministry receivers checked & serviced
in our own workshops

**RACAL RA17, & RA17L, 1 to 30MHz.
R210 2 to 16MHz.**

Ring for prices & stocks.


Test equipment & Components – send for lists
Large SAE please or 20p stamps.

WANTED – WW2 MILITARY RADIOS
AR11, B2, etc
W.H.Y.?



ELECTRONICS (G8AQN)

151a BILTON ROAD, RUGBY, WARCS CV22 7AS
Tel: Rugby (0788) 76473, Eve (0788) 71066



HATELY ANTENNA TECHNOLOGY GM3HAT

1 Kenfield Place, Aberdeen AB1 7UW, Scotland, U.K.

BROAD-BAND CAPACITOR DIPOLE BCD 3.5-4

The HAT patented technique of the CAPACITOR BALUN has enabled us to offer the latest
sensational achievement:-

The WHOLE of the 80 and 75 metre BAND covered with SWR better than 1.5 to 1.
ENTHUSIASTS for 80 metre DX and USA Readers Note:-


1. LOW NOISE on RECEIVE... We guarantee that this antenna type will produce
many S Points less background noise than any other feed system for a half
wavelength antenna, and yet the DX signals are stronger.
2. LOW SWR on TRANSMIT... We guarantee you will be happy to use your 50
ohm coax output transmitter (or linear) without an ATU even if the PA is a lousy
semiconductor version.

Send SAE (or IRC) for full technical details, specification, photograph etc. These
antennas are 42 m (139 ft) in length.

Full power version for 2 kW DC input to PA, BCD 3.5-4 £80 inclusive VAT & post
Medium power version for 200 W DC input to PA, MP BCD 3.5-4 £45 inclusive VAT & post
Proprietor: Maurice C Hately, M Sc, FIEE Chartered Electrical Engineer [GM3HAT]

USED AMATEUR EQUIPMENT?

I Buy, Sell & Exchange

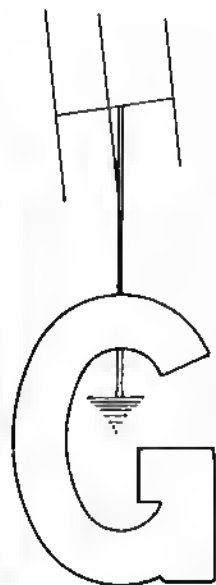

WANTED - Your TOP QUALITY USED AMATEUR EQUIPMENT! We pay the very best prices for all types of used amateur radio equipment. Is your gear in top condition? Why not give G4TNY a call? If our offer isn't enough, we'll put your gear on our 'RIGSEARCH' service absolutely FREE to be offered to any prospective buyer that contacts us, all it costs you is a small commission, and we handle the hassle for you!

DON'T FORGET - IF YOU'RE SELLING, IT'S G4TNY!

BUYING? - If your looking for quality used amateur equipment, it has to be G4TNY. We have a large stock of used equipment ourselves, but, if we don't have it, our new amateur radio brokerage probably will, or may well be able to quickly find you what you're looking for!

G4TNY IS CHANGING - IF WE COULDN'T HELP IN THE PAST, WE'RE SORRY, BUT WHY NOT TRY US NOW?

CLUBS, LOOK! Send G4TNY your details for FREE REGULAR LISTS OF AVAILABLE GEAR!

Phone Dave, G4TNY on (040 24) 57722 or (0836) 201530. From 9 am to 7 pm, Mon to Sat.
SAE PLEASE FOR LISTS. Personal callers by appointment only, please!

**MAIL ORDER:
OVERNIGHT DELIVERY
NOW AVAILABLE!**

G4TNY AMATEUR RADIO
132 Albany Road, Hornchurch, Essex RM12 4AQ

**PART EXCHANGE
POSSIBLE**

STEPHENS-JAMES LTD.

47 Warrington Road, Leigh, Lancs WN7 3EA. Telephone (0942) 676790
Turn at the Greyhound Motel on the A580 (East Lancs. Road).

LANCASHIRE & THE NORTH WEST'S LEADING RETAILER IN AMATEUR RADIO. 20 YEARS SERVING THE AMATEUR. BY AMATEUR
SPECIALISING ONLY IN AMATEUR RADIO EQUIPMENT. 24 HOUR MAIL ORDER SERVICE.

ANTENNA RANGE

Cushcraft	
A3 3 Element Tribander Beam	£262.00
A3 4 Element Tribander Beam	£353.35
10-3CD 3 Element 10m Monobander	£115.04
15-3CD 3 Element 15m Monobander	£139.70
20-3CD 3 Element 20m Monobander	£238.21
AP8 8 Band Vertical 25ft High	£164.35
AP5 5 Band Vertical 25ft High	£123.36
18 Element 2m Boomer Antenna	£108.59
15 Element 2m Boomer Antenna	£85.26
Butternut	
HF6VX 6 Band Vertical Antenna	£159.00
HF2V 80/40 meter Vertical	£142.00
A 182HF6V 17/12m Add on kit	£30.99
20MRK HF2V 20m Kit	£33.39
Hy-Gain	
TH2MK3 2 Element Tribander	£259.37
18AVT 5 Band Vertical	£157.92
Jaybeam	
MM/Minimax Triband Beam	£327.00
TB3MK3 3 Element Tribander	£318.00
TB2MK3 2 Element Tribander	£212.75
TB1MK3 Rotary Triband dipole	£105.60
VR3MK3 Triband Vertical	£75.00
DB4 4 & 8m Element Beam	£117.87
4Y74m 4m 4 Element Beam	£40.53
4Y76m 6m 4 Element Beam	£49.45
Antenna Tuning Units	
CAPCO SPC-3000	£225.00
CAPCO SPC-3000D	£325.00
Kenwood AT230	£206.00
MFJ 982B 1.5 kW Versaluner	£241.00
MFJ 949C 300W Versaluner	£157.00
MFJ 300 Watt Basic ATU	£105.00
MFJ 1601 Random Wire Tuner	£42.00

TONNA and Jaybeam VHF and UHF. Complete range of Aluminium tubing, clamps, lashing kits, rope, Insulators.

Kenwood Range

TS940s HF Transceiver	£1995.00
AT940 Automatic Antenna tuner	£244.88
SP940 Speaker with filters	£87.55
TS440S HF Transceiver	£1138.61
AT440 Automatic Antenna tuner	£144.82
PS50 20 amp power supply	£222.49
TS140S HF Transceiver	£882.00
PS430 power supply	£173.78
SP430 Speaker	£40.81
AT250 Automatic Antenna tuning unit	£366.00
AT230 Antenna Tuning Unit	£208.67
SP230 Speaker with filters	£56.49
TL922HF Linear amplifier	£1495.00
MC50 Base station microphone	£46.00
MC80A De Luxe desk microphone	£88.22
TR751E 2m Multimode Mobile Transceiver	£599.00
TR851E 70cm multimode transceiver	£899.00
TM2550E 45 watt 2m Transceiver	£465.00
TM221E 45 watt FM Transceiver	£317.00
TM421ES 70cm 35 watt Transceiver	£372.00
TH21E 2m FM Micro Transceiver	£189.00
TH41E 70cm Micro Transceiver	£216.00
TH25 2m FM Handheld Transceiver	£258.00
TH205E 2m FM Handheld Transceiver	£215.00
TH215E 2m Handheld FM Transceiver	£252.00
TH405E 70 cm Handheld FM Transceiver	£288.00
R5000 General coverage receiver	£875.00
VC20VHF Converter 108-174MHz	£167.21
R2000 General coverage receiver	£595.00
VC10VHF Converter 118-174MHz	£161.95
HSS De Luxe headphones	£37.54
LF30A Low Pass Filter	£34.00

Full range of accessories stocked, microphones, SWR meter, DC Leads, Antennas etc.
Full size GSRV Antenna £1650. Half size £1450.
3 7MHz traps £350. 200 watt 8MHz traps £350.
HS50B 1:1 1kW Balun £25.00
HP4A TVI Filter £9.00

Receivers

AR2002 Scanning receiver covering 25-550MHz and 800-1300MHz	£487.00
R535 Aircraft Bands receiver covering 108-143 and 220-380MHz	£249.00
R537 Handheld Aircraft Band Receiver	£69.50
Antennas and accessories for above stocked.	
HF125 General Coverage Receiver	£375.00
WIN108 Handheld Scanning Airband Receiver	£175.00

Defong Range

AD370 Outdoor Active Antenna	£69.00
AD270 Indoor Active Antenna	£51.75
SRB2 "Woodpecker" Balun	£86.00
D70 Morse Tutor	£54.63

MFJ Accessories Range

MFJ1701 6 way Antenna switch	£30.72
MFJ910 Mobile Matching Unit	£20.42
MFJ300 watt dummy load	£28.35
MFJRF Noise Bridge	£63.10
MFJ 815 2KW Cross needle SWR/Power meter	£57.32

Diawa

CS201 2 way Ant Switch	£21.90
CS401 4 way Ant Switch BNC Sockets	£30.39
CN401 Cressed Needle SWR	£61.00

Rotators

Kenpro KR400	£139.00
Kenpro KR400C	£169.00
Kenpro KR600C	£219.00
Diawa MR 750E	£254.00
CDE AR40	£168.72
CD4511R	£237.00

Power Supplies

PS310M Heavy duty 30AMP 22A Cont.	£198.95
PS120M 3-15V variable 12AMP max.	£79.50

We are also stockist for Global, C&I Co., and have a full range of public, commercial, ISM, AMPL and others.
Our secondhand list is updated daily. Please send SAE for this or any information.
Shop Hours 9.30 to 5.00 pm Mon, Fri. 4.30 pm Sat

J. & P. ELECTRONICS LTD.

ARE PROUD TO ANNOUNCE

RMS 3

The Programme: RTTY, Morse & SSTV reception with one programme for your Spectrum. Menu driven, this programme is the most "User Friendly" on the market today. The RTTY section switches easily between normal and reverse tones & thorough 4 standard Baud rates. Various tone shifts are handled automatically. The Morse section follows our well tried and tested system, decoding 9 to about 30 wpm. The 8 second, standard black and white SSTV transmissions are decoded by the SSTV section, as well as Frame Sequential Colour, though this will be displayed in black & white. All sections of the programme will operate without filler or interlace, though a suitable filler will improve decoding on the noisy HF bands.

The Filter: Specially designed for use with this programme, the filter switches easily between the three modes. Each of the three filters incorporated in the unit are designed for optimum performance, and AGC is incorporated as standard. The RMS 3 filter is also suitable for use with other programmes. (Please state programme source).

The System: We are able to offer a saving to customers purchasing the programme and filter at the same time.

RMS 3 THE PROGRAMME £17.50

RMS 3 THE FILTER £35.00

RMS 3 THE SYSTEM £47.50

Please send LARGE S.A.E. for full details of all our products

New Road Complex, New Road, Kidderminster
DY10 1AL Tel: (0562) 753893



RF CONNECTORS & ADAPTORS

1. 1/8" Coax Plug to 1/8" Coax Socket - 50 Ohm - 10000	100.00
2. 1/8" Coax Plug to 1/8" Coax Socket - 50 Ohm - 10000	100.00
3. 1/8" Coax Plug to 1/8" Coax Socket - 50 Ohm - 10000	100.00
4. 1/8" Coax Plug to 1/8" Coax Socket - 50 Ohm - 10000	100.00
5. 1/8" Coax Plug to 1/8" Coax Socket - 50 Ohm - 10000	100.00
6. 1/8" Coax Plug to 1/8" Coax Socket - 50 Ohm - 10000	100.00
7. 1/8" Coax Plug to 1/8" Coax Socket - 50 Ohm - 10000	100.00
8. 1/8" Coax Plug to 1/8" Coax Socket - 50 Ohm - 10000	100.00
9. 1/8" Coax Plug to 1/8" Coax Socket - 50 Ohm - 10000	100.00
10. 1/8" Coax Plug to 1/8" Coax Socket - 50 Ohm - 10000	100.00
11. 1/8" Coax Plug to 1/8" Coax Socket - 50 Ohm - 10000	100.00
12. 1/8" Coax Plug to 1/8" Coax Socket - 50 Ohm - 10000	100.00
13. 1/8" Coax Plug to 1/8" Coax Socket - 50 Ohm - 10000	100.00
14. 1/8" Coax Plug to 1/8" Coax Socket - 50 Ohm - 10000	100.00
15. 1/8" Coax Plug to 1/8" Coax Socket - 50 Ohm - 10000	100.00
16. 1/8" Coax Plug to 1/8" Coax Socket - 50 Ohm - 10000	100.00
17. 1/8" Coax Plug to 1/8" Coax Socket - 50 Ohm - 10000	100.00
18. 1/8" Coax Plug to 1/8" Coax Socket - 50 Ohm - 10000	100.00
19. 1/8" Coax Plug to 1/8" Coax Socket - 50 Ohm - 10000	100.00
20. 1/8" Coax Plug to 1/8" Coax Socket - 50 Ohm - 10000	100.00
21. 1/8" Coax Plug to 1/8" Coax Socket - 50 Ohm - 10000	100.00
22. 1/8" Coax Plug to 1/8" Coax Socket - 50 Ohm - 10000	100.00
23. 1/8" Coax Plug to 1/8" Coax Socket - 50 Ohm - 10000	100.00
24. 1/8" Coax Plug to 1/8" Coax Socket - 50 Ohm - 10000	100.00
25. 1/8" Coax Plug to 1/8" Coax Socket - 50 Ohm - 10000	100.00
26. 1/8" Coax Plug to 1/8" Coax Socket - 50 Ohm - 10000	100.00
27. 1/8" Coax Plug to 1/8" Coax Socket - 50 Ohm - 10000	100.00
28. 1/8" Coax Plug to 1/8" Coax Socket - 50 Ohm - 10000	100.00
29. 1/8" Coax Plug to 1/8" Coax Socket - 50 Ohm - 10000	100.00
30. 1/8" Coax Plug to 1/8" Coax Socket - 50 Ohm - 10000	100.00
31. 1/8" Coax Plug to 1/8" Coax Socket - 50 Ohm - 10000	100.00
32. 1/8" Coax Plug to 1/8" Coax Socket - 50 Ohm - 10000	100.00
33. 1/8" Coax Plug to 1/8" Coax Socket - 50 Ohm - 10000	100.00
34. 1/8" Coax Plug to 1/8" Coax Socket - 50 Ohm - 10000	100.00
35. 1/8" Coax Plug to 1/8" Coax Socket - 50 Ohm - 10000	100.00
36. 1/8" Coax Plug to 1/8" Coax Socket - 50 Ohm - 10000	100.00
37. 1/8" Coax Plug to 1/8" Coax Socket - 50 Ohm - 10000	100.00
38. 1/8" Coax Plug to 1/8" Coax Socket - 50 Ohm - 10000	100.00
39. 1/8" Coax Plug to 1/8" Coax Socket - 50 Ohm - 10000	100.00
40. 1/8" Coax Plug to 1/8" Coax Socket - 50 Ohm - 10000	100.00
41. 1/8" Coax Plug to 1/8" Coax Socket - 50 Ohm - 10000	100.00
42. 1/8" Coax Plug to 1/8" Coax Socket - 50 Ohm - 10000	100.00
43. 1/8" Coax Plug to 1/8" Coax Socket - 50 Ohm - 10000	100.00
44. 1/8" Coax Plug to 1/8" Coax Socket - 50 Ohm - 10000	100.00
45. 1/8" Coax Plug to 1/8" Coax Socket - 50 Ohm - 10000	100.00
46. 1/8" Coax Plug to 1/8" Coax Socket - 50 Ohm - 10000	100.00
47. 1/8" Coax Plug to 1/8" Coax Socket - 50 Ohm - 10000	100.00
48. 1/8" Coax Plug to 1/8" Coax Socket - 50 Ohm - 10000	100.00
49. 1/8" Coax Plug to 1/8" Coax Socket - 50 Ohm - 10000	100.00
50. 1/8" Coax Plug to 1/8" Coax Socket - 50 Ohm - 10000	100.00
51. 1/8" Coax Plug to 1/8" Coax Socket - 50 Ohm - 10000	100.00
52. 1/8" Coax Plug to 1/8" Coax Socket - 50 Ohm - 10000	100.00
53. 1/8" Coax Plug to 1/8" Coax Socket - 50 Ohm - 10000	100.00
54. 1/8" Coax Plug to 1/8" Coax Socket - 50 Ohm - 10000	100.00
55. 1/8" Coax Plug to 1/8" Coax Socket - 50 Ohm - 10000	100.00
56. 1/8" Coax Plug to 1/8" Coax Socket - 50 Ohm - 10000	100.00
57. 1/8" Coax Plug to 1/8" Coax Socket - 50 Ohm - 10000	100.00
58. 1/8" Coax Plug to 1/8" Coax Socket - 50 Ohm - 10000	100.00
59. 1/8" Coax Plug to 1/8" Coax Socket - 50 Ohm - 10000	100.00
60. 1/8" Coax Plug to 1/8" Coax Socket - 50 Ohm - 10000	100.00
61. 1/8" Coax Plug to 1/8" Coax Socket - 50 Ohm - 10000	100.00
62. 1/8" Coax Plug to 1/8" Coax Socket - 50 Ohm - 10000	100.00
63. 1/8" Coax Plug to 1/8" Coax Socket - 50 Ohm - 10000	100.00
64. 1/8" Coax Plug to 1/8" Coax Socket - 50 Ohm - 10000	100.00
65. 1/8" Coax Plug to 1/8" Coax Socket - 50 Ohm - 10000	100.00
66. 1/8" Coax Plug to 1/8" Coax Socket - 50 Ohm - 10000	100.00
67. 1/8" Coax Plug to 1/8" Coax Socket - 50 Ohm - 10000	100.00
68. 1/8" Coax Plug to 1/8" Coax Socket - 50 Ohm - 10000	100.00
69. 1/8" Coax Plug to 1/8" Coax Socket - 50 Ohm - 10000	100.00
70. 1/8" Coax Plug to 1/8" Coax Socket - 50 Ohm - 10000	100.00
71. 1/8" Coax Plug to 1/8" Coax Socket - 50 Ohm - 10000	100.00
72. 1/8" Coax Plug to 1/8" Coax Socket - 50 Ohm - 10000	100.00
73. 1/8" Coax Plug to 1/8" Coax Socket - 50 Ohm - 10000	100.00
74. 1/8" Coax Plug to 1/8" Coax Socket - 50 Ohm - 10000	100.00
75. 1/8" Coax Plug to 1/8" Coax Socket - 50 Ohm - 10000	100.00
76. 1/8" Coax Plug to 1/8" Coax Socket - 50 Ohm - 10000	100.00
77. 1/8" Coax Plug to 1/8" Coax Socket - 50 Ohm - 10000	100.00
78. 1/8" Coax Plug to 1/8" Coax Socket - 50 Ohm - 10000	100.00
79. 1/8" Coax Plug to 1/8" Coax Socket - 50 Ohm - 10000	100.00
80. 1/8" Coax Plug to 1/8" Coax Socket - 50 Ohm - 10000	100.00
81. 1/8" Coax Plug to 1/8" Coax Socket - 50 Ohm - 10000	100.00
82. 1/8" Coax Plug to 1/8" Coax Socket - 50 Ohm - 10000	100.00
83. 1/8" Coax Plug to 1/8" Coax Socket - 50 Ohm - 10000	100.00
84. 1/8" Coax Plug to 1/8" Coax Socket - 50 Ohm - 10000	100.00
85. 1/8" Coax Plug to 1/8" Coax Socket - 50 Ohm - 10000	100.00
86. 1/8" Coax Plug to 1/8" Coax Socket - 50 Ohm - 10000	100.00
87. 1/8" Coax Plug to 1/8" Coax Socket - 50 Ohm - 10000	100.00
88. 1/8" Coax Plug to 1/8" Coax Socket - 50 Ohm - 10000	100.00
89. 1/8" Coax Plug to 1/8" Coax Socket - 50 Ohm - 10000	100.00
90. 1/8" Coax Plug to 1/8" Coax Socket - 50 Ohm - 10000	100.00
91. 1/8" Coax Plug to 1/8" Coax Socket - 50 Ohm - 10000	100.00
92. 1/8" Coax Plug to 1/8" Coax Socket - 50 Ohm - 10000	100.00
93. 1/8" Coax Plug to 1/8" Coax Socket - 50 Ohm - 10000	100.00
94. 1/8" Coax Plug to 1/8" Coax Socket - 50 Ohm - 10000	100.00
95. 1/8" Coax Plug to 1/8" Coax Socket - 50 Ohm - 10000	100.00
96. 1/8" Coax Plug to 1/8" Coax Socket - 50 Ohm - 10000	100.00
97. 1/8" Coax Plug to 1/8" Coax Socket - 50 Ohm - 10000	100.00
98. 1/8" Coax Plug to 1/8" Coax Socket - 50 Ohm - 10000	100.00
99. 1/8" Coax Plug to 1/8" Coax Socket - 50 Ohm - 10000	100.00
100. 1/8" Coax Plug to 1/8" Coax Socket - 50 Ohm - 10000	100.00



SAE FOR LARGE LISTS OF SUPPLIES CRYSTALS
POSTAGE IS EXTRA AT ONLY 50p per OTHER FOR ANY QUANTITY
W. H. WESTLAKE, CLAWTON, HOLSWORTHY, DEVON, (0409) 253758

J. BIRKETT

25 THE STRAIT, LINCOLN, TEL: 20767

EX-MILITARY COMMUNICATION RECEIVER R210, 2 to 16MHz in 7 Switched Bands with CW, SSB, AM, FCO Facilities, Aerial Input, 80 Ohm Balanced Line, Long Wire Or Whip, BFO, CW Filter, Crystal Calibrator 10KHz, 100KHz, Noise Blanker, Complete with 240 Volt AC Power Pack, And Leaded Speaker, And Maintenance Pack of Headphones. Price £79.95, Carr £80.00. **TUBULAR TANTALUM CAPACITORS** 88ul 35v, 8.2ul 35v, 10ul 25v, 100ul 20v All @ 10p each. **HIGH VOLTAGE SILVER MICA CAPACITORS** 750v 10p, 18p, 1, 27p, 1, 120p, 1, 270p, 1, 330p, 1, 500p, 1, 1000p, 1, 1500p, 1, 2000p, 1, 2500p, 1, 3000p, 1, 3500p, 1, 4000p, 1, 4500p, 1, 5000p, 1, 5500p, 1, 6000p, 1, 6500p, 1, 7000p, 1, 7500p, 1, 8000p, 1, 8500p, 1, 9000p, 1, 9500p, 1, 10000p, 1, 10500p, 1, 11000p, 1, 11500p, 1, 12000p, 1, 12500p, 1, 13000p, 1, 13500p, 1, 14000p, 1, 14500p, 1, 15000p, 1, 15500p, 1, 16000p, 1, 16500p, 1, 17000p, 1, 17500p, 1, 18000p, 1, 18500p, 1, 19000p, 1, 19500p, 1, 20000p, 1, 20500p, 1, 21000p, 1, 21500p, 1, 22000p, 1, 22500p, 1, 23000p, 1, 23500p, 1, 24000p, 1, 24500p, 1, 25000p, 1, 25500p, 1, 26000p, 1, 26500p, 1, 27000p, 1, 27500p, 1, 28000p, 1, 28500p, 1, 29000p, 1, 29500p, 1, 30000p, 1, 30500p, 1, 31000p, 1, 31500p, 1, 32000p, 1, 32500p, 1, 33000p, 1, 33500p, 1, 34000p, 1, 34500p, 1, 35000p, 1, 35500p, 1, 36000p, 1, 36500p, 1, 37000p, 1, 37500p, 1, 38000p, 1, 38500p, 1, 39000p, 1, 39500p, 1, 40000p, 1, 40500p, 1, 41000p, 1, 41500p, 1, 42000p, 1, 42500p, 1, 43000p, 1, 43500p, 1, 44000p, 1, 44500p, 1, 45000p, 1, 45500p, 1, 46000p, 1, 46500p, 1, 47000p, 1, 47500p, 1, 48000p, 1, 48500p, 1, 49000p, 1, 49500p, 1, 50000p, 1, 50500p, 1, 51000p, 1, 51500p, 1, 52000p, 1, 52500p, 1, 53000p, 1, 53500p, 1, 54000p, 1, 54500p, 1, 55000p, 1, 55500p, 1, 56000p, 1, 56500p, 1, 57000p, 1, 57500p, 1, 58000p, 1, 58500p, 1, 59000p, 1, 59500p, 1, 60000p, 1, 60500p, 1, 61000p, 1, 61500p, 1, 62000p, 1, 62500p, 1, 63000p, 1, 63500p, 1, 64000p, 1, 64500p, 1, 65000p, 1, 65500p, 1, 66000p, 1, 66500p, 1, 67000p, 1, 67500p, 1, 68000p, 1, 68500p, 1, 69000p, 1, 69500p, 1, 70000p, 1, 70500p, 1, 71000p, 1, 71500p, 1, 72000p, 1, 72500p, 1, 73000p, 1, 73500p, 1, 74000p, 1, 74500p, 1, 75000p, 1, 75500p, 1, 76000p, 1, 76500p, 1, 77000p, 1, 77500p, 1, 78000p, 1, 78500p, 1, 79000p, 1, 79500p, 1, 80000p, 1, 80500p, 1, 81000p, 1, 81500p, 1, 82000p, 1, 82500p, 1, 83000p, 1, 83500p, 1, 84000p, 1, 84500p, 1, 85000p, 1, 85500p, 1, 86000p, 1, 86500p, 1, 87000p, 1, 87500p, 1, 88000p, 1, 88500p, 1, 89000p, 1, 89500p, 1, 90000p, 1, 90500p, 1, 91000p, 1, 91500p, 1, 92000p, 1, 92500p, 1, 93000p, 1, 93500p, 1, 94000p, 1, 94500p, 1, 95000p, 1, 95500p, 1, 96000p, 1, 96500p, 1, 97000p, 1, 97500p, 1, 98000p, 1, 98500p, 1, 99000p, 1, 99500p, 1, 100000p, 1, 100500p, 1, 101000p, 1, 101500p, 1, 102000p, 1, 102500p, 1, 103000p, 1, 103500p, 1, 104000p, 1, 104500p, 1, 105000p, 1, 105500p, 1, 106000p, 1, 106500p, 1, 107000p, 1, 107500p, 1, 108000p, 1, 108500p, 1, 109000p, 1, 109500p, 1, 110000p, 1, 110500p, 1, 111000p, 1, 111500p, 1, 112000p, 1, 112500p, 1, 113000p, 1, 113500p, 1, 114000p, 1, 114500p, 1, 115000p, 1, 115500p, 1, 116000p, 1, 116500p, 1, 117000p, 1, 117500p, 1, 118000p, 1, 118500p, 1, 119000p, 1, 119500p, 1, 120000p, 1, 120500p, 1, 121000p, 1, 121500p, 1, 122000p, 1, 122500p, 1, 123000p, 1, 123500p, 1, 124000p, 1, 124500p, 1, 125000p, 1, 125500p, 1, 126000p, 1, 126500p, 1, 127000p, 1, 127500p, 1, 128000p, 1, 128500p, 1, 129000p, 1, 129500p, 1, 130000p, 1, 130500p, 1, 131000p, 1, 131500p, 1, 132000p, 1, 132500p, 1, 133000p, 1, 133500p, 1, 134000p, 1, 134500p, 1, 135000p, 1, 135500p, 1, 136000p, 1, 136500p, 1, 137000p, 1, 137500p, 1, 138000p, 1, 138500p, 1, 139000p, 1, 139500p, 1, 140000p, 1, 140500p, 1, 141000p, 1, 141500p, 1, 142000p, 1, 142500p, 1, 143000p, 1, 143500p, 1, 144000p, 1, 144500p, 1, 145000p, 1, 145500p, 1, 146000p, 1, 146500p, 1, 147000p, 1, 147500p, 1, 148000p, 1, 148500p, 1, 149000p, 1, 149500p, 1, 150000p, 1, 150500p, 1, 151000p, 1, 151500p, 1, 152000p, 1, 152500p, 1, 153000p, 1, 153500p, 1, 154000p, 1, 154500p, 1, 155000p, 1, 155500p, 1, 156000p, 1, 156500p, 1, 157000p, 1, 157500p, 1, 158000p, 1, 158500p, 1, 159000p, 1, 159500p, 1, 160000p, 1, 160500p, 1, 161000p, 1, 161500p, 1, 162000p, 1, 162500p, 1, 163000p, 1, 163500p, 1, 164000p, 1, 164500p, 1, 165000p, 1, 165500p, 1, 166000p, 1, 166500p, 1, 167000p, 1, 167500p, 1, 168000p, 1, 168500p, 1, 169000p, 1, 169500p, 1, 170000p, 1, 170500p, 1, 171000p, 1, 171500p, 1, 172000p, 1, 172500p, 1, 173000p, 1, 173500p, 1, 174000p, 1, 174500p, 1, 175000p, 1, 175500p, 1, 176000p, 1, 176500p, 1, 177000p, 1, 177500p, 1, 178000p, 1, 178500p, 1, 179000p, 1, 179500p, 1, 180000p, 1, 180500p, 1, 181000p, 1, 181500p, 1, 182000p, 1, 182500p, 1, 183000p, 1, 183500p, 1, 184000p, 1, 184500p, 1, 185000p, 1, 185500p, 1, 186000p, 1, 186500p, 1, 187000p, 1, 187500p, 1, 188000p, 1, 188500p, 1, 189000p, 1, 189500p, 1, 190000p, 1, 190500p, 1, 191000p, 1, 191500p, 1, 192000p, 1, 192500p, 1, 193000p, 1, 193500p, 1, 194000p, 1, 194500p, 1, 195000p, 1, 195500p, 1, 196000p, 1, 196500p, 1, 197000p, 1, 197500p, 1, 198000p, 1, 198500p, 1, 199000p, 1, 199500p, 1, 200000p, 1, 200500p, 1, 201000p, 1, 201500p, 1, 202000p, 1, 202500p, 1, 203000p, 1, 203500p, 1, 204000p, 1, 204500p, 1, 205000p, 1, 205500p, 1, 206000p, 1, 206500p, 1, 207000p, 1, 207500p, 1, 208000p, 1, 208500p, 1, 209000p, 1, 209500p, 1, 210000p, 1, 210500p, 1, 211000p, 1, 211500p, 1, 212000p, 1, 212500p, 1, 213000p, 1, 213500p, 1, 214000p, 1, 214500p, 1, 215000p, 1, 215500p, 1, 216000p, 1, 216500p, 1, 217000p, 1, 217500p, 1, 218000p, 1, 218500p, 1, 219000p, 1, 219500p, 1, 220000p, 1, 220500p, 1, 221000p, 1, 221500p, 1, 222000p, 1, 222500p, 1, 223000p, 1, 223500p, 1, 224000p, 1, 224500p, 1, 225000p, 1, 225500p, 1, 226000p, 1, 226500p, 1, 227000p, 1, 227500p, 1, 228000p, 1, 228500p, 1, 229000p, 1, 229500p, 1, 230000p, 1, 230500p, 1, 231000p, 1, 231500p, 1, 232000p, 1, 232500p, 1, 233000p, 1, 233500p, 1, 234000p, 1, 234500p, 1, 235000p, 1, 235500p, 1, 236000p, 1, 23650

COMPUTER SOFTWARE HARDWARE

IBM/AMSTRAD PC MORSE TUTOR £12. Contest worker £20. Others. SAE Charles Crane, 2 Pimento Drive, Earley RG6 2GZ.

AMSTRAD SOFTWARE, Worked All Britain. The first electronic WAB book. Superb program. PREFIX, this invaluable program provides comprehensive information for any entered prefix or country. LOGBOOK, an electronic logbook, uses whole disc space for storing QSO information. SAE details MTCS, PO Box 148, Sidcup, Kent.

MORSE TUTOR PROGRAM. Teaches morse with machine-code accuracy on Amstrads 464/664/6128. Includes over fifty 36-word tests. Tape £6.50, disc £7.90. Mail order: Alan Jones, 70 Shenley Lane, Birmingham B29 5PN.

G4UXD's REVIEW TOPPING MORSE TUTOR (June 1986 Radcom). Electron/BBC's. IBM/Amstrad-PCs. Variable speed/delay, extra letter frequency, 100 tests, + every feature! £6.50 tape, £7.50 disc. D. Brandon, Woodlands Road, Chester CH4 8LB.

PACKET RADIO with your Commodore 64/128. Completely compatible, more features than systems using TNC's. VHF/HF operation, 1200/300 BAUD selectable. Tuning indicator, relay switching, 138v operation. Built and tested unit unboxed £84.50. Complete kit and instructions £64.50. PCB circuit instructions £18.00. Free packet program for the above, 28 memories, split screen with every purchase. Enquiries to Procomm Systems, 71 Theobald Road, Norwich, Norfolk NR1 2NX.

HOLIDAY ACCOMMODATION

FLYING FROM GATWICK? Stay at Mill Lodge Guest House. 4 minutes from airport. Tiansport available. Telephone (0293) 771170.

SAN ANTONIO/BIZA HOLIDAY FLAT. Rig for all brands available. Driest DL7AEA, Box 73, 07820 San Antonio. Tel 003471 341138.

TDRQUAY, s/c flats. Radcom couple £44.00 weekly Jan-April, £50.00 May-June. TV. Linen. (0803) 607333.

ELEVATED SITE, use of shack, b&b, caravan, bunkhouse, camping. Open all year: "Tynrhos", Mynytho, Pwllheli, N.Wales (0758) 740712.

BRIXHAM SOUTH DEVON. Superb harbourside location, with use of shack (726R, Bearcat DX1000, etc). Ideal for walking; good centre for touring Devon. Patchwork weekends. Torhaven Hotel, King Street. Tel. (0803) 882281.

CORNWALL. Beautiful Georgian house in conservation area offers bed and full English breakfast or continental. Candlelight supper optional. Swimming pool and lounge. Tel (0726) 814488 (G4UBK).

MISCELLANEOUS

COURSE FOR CITY & GUILDS, Radio Amateurs Examination. Pass this important examination and obtain your licence, with an RRC Home Study Course. For details of this and other courses (GCSE, Career and professional examinations, etc) write or phone—THE RAPID RESULTS COLLEGE, Dept JT13, Tullion House, London SW19 4DS. Tel: 01-947 7272 (9am-5pm) or use our 24hr Recordcall service 01-946 1102 quoting JT13.

PROTECT YOURSELF FROM STAGGERING repair costs. A R.M.S. will settle your bill in full. It costs nothing to get the facts, it could cost a packet not to... Remember, the Amateur Radio Maintenance Service contract starts where insurance leaves off. Details from Amateur Radio Maintenance Service, FREEPOST, Omskirk, Lanc L39 3AB. No stamp required.

HEATHKIT UK spares and service centre. Cedar Electronics, Unit 12, Station Drive, Bredon, Tewkesbury, Gloucestershire. Telephone (0684) 73127.

RSGB AMATEUR RADIO INSURANCE SCHEME

"ALL RISKS" INSURANCE for portable/mobile/base station amateur radio and ancillary equipment. A service for RSGB members only. Also public liability and equipment insurance for affiliated clubs and societies. Details and leaflets from Nick Gibson, Amateur Radio Insurance Services Ltd, 19 Quarry Street, Guildford, Surrey. Tel: 0483 33771.

WANTED

PLATINUM, GOLD, SILVER SCRAP melted, assayed and paid for within 24 hours. Also pcb's, plugs, sockets, connectors, reed relays, plated items, rhodium, palladium, ruthenium, tantalum. Any quantity. Electronic scrap, catalysts, fuel cells, etc. For current prices phone (0773) 570143 (recording) or to sell phone (0773) 570141. Ask for Eric Henderson. If sending samples or parcels of materials, please use registered post. Steinbeck Refineries (UK) Ltd, Peasehill Industrial Estate, Ripley, Derbyshire DE5 3JG.

VALVES WANTED especially types PX4, PX25, PP3/250, KT66, KT86 and equivalents. Ex equipment considered. Valve collections, BNC plugs and shop clearance also purchased. FOR SALE 20lbs (9kg) mixed resistors, capacitors, potentiometers etc etc. £10 + VAT delivered. SAE valve catalogue or quotations. Billingham Valves, 39 Highlands Road, Horsham, W. Sussex RH13 5LS. Phone (0403) 654086 Fax (0403) 21018.

SITUATIONS VACANT

POWER AMPLIFIERS

Qualified Test Engineer with clean driving licence required to work on broadband power amps, LF to SHF, and h.v.p.s.u.s. Customer liaison and some travel. Other RF vacancies.

Contact Tim Hague, G8GGP, on 0494 776060.

TEXSCAN INSTRUMENTS LTD
Watermeadow House, Germain St., Chesham HP5 1LF

RF Design Engineer

£ NEG

Our client is part of a major public group manufacturing and distributing high technology components and sub systems.

Expansion has created an opportunity for a qualified electronics engineer with at least 2 years 'hands on' development experience to component level in RF work up to VHF level.

The position would suit an enthusiastic engineer looking for technical involvement from concept through to production, in addition, liaison with an international customer base with opportunities to travel.

Contact **JULIA HEWETT** or **PETER MROCH** on (0582) 450054 - 24 hours in the strictest confidence.

Ref. RFPM



TECHNICAL RECRUITMENT LIMITED 26-34 LIVERPOOL ROAD LUTON LU1 1RS TEL (0582) 450054

INDEX TO ADVERTISERS

AJH Electronics.....230	Low Electronics.....158/60
Amcomm of London.....1FC	
AMOAT.....230	
ARE Communications Ltd.....IBC	Nevada (Telecomms).....225 & 227
J. Birkell.....232	
Biedhurst Electronics.....229	QualisLab Marketing Ltd.....228
Cambridge Kits.....236	Random Electronics.....236
CAPCO Electronics Ltd.....226	RAYCOM Communications.....164
CR Supply.....230	RN Electronics.....225
Dalong Electronics Ltd.....228	Spectrum Communications.....236
	Stephens-James.....231
G4TNY Amateur Radio.....231	
Garex Electronics.....229	Technical Recruitment Ltd.....233
	Technical Software.....227
Hately Antenna Technology.....230	Texscan Instruments Ltd.....233
Heatherly Products.....230	
C.M. Howes Communications.....226	
HRS Electronics Ltd.....161	Uppington Tele-Radio.....236
ICOM (UK) Ltd.....162/3	
I.C.S Electronics Ltd.....166	Ward Electronics.....228
	Waters & Stanton.....165
	W.H. Westlake.....232
J.E.P. Electronics.....232	White Rose Rally.....236
	C. Wilson.....226
R.A. Kent.....225	
KW Ten-Tec Ltd.....236	Yaesu Musen Co Ltd.....OBC

RSGB MAIL-ORDER PRICE LIST

	Non-members' price	Members' price
RSGB books		
A Guide to Amateur Radio (19th edn).....	£4.34	£3.69
Amateur Radio Operating Manual (3rd edn).....	£6.84	£5.81
Amateur Radio Software.....	£11.25	£9.58
Buyer's Guide to Amateur Radio Equipment.....	£8.49	£7.22
G-QRP Club Circuit Book.....	£5.25	£4.46
HF Antennas for All locations.....	£9.99	£8.49
How to Pass the Radio Amateur's Examination.....	£3.80	£3.23
Ins and Outs of Repeaters.....	£2.22	£1.69
Microwave Newsletter Technical Collection.....	£10.87	£9.24
Morse Code for Radio Amateurs.....	£3.21	£2.73
RSGB Amateur Radio Call Book, Winter 1987-8.....	£7.64	£6.49
Radio Amateur's Examination Manual (11th edn).....	£5.38	£4.57
Radio Communication Handbook Vols 1 & 2 (pb).....	£22.29	£18.85
Radio Data Reference Book (5th edn).....	£9.59	£8.15
Teletype Handbook (2nd edn).....	£9.35	£7.95
Television Interference Manual (2nd edn).....	£3.50	£2.98
Test Equipment for the Radio Amateur.....	£9.25	£7.86
VHF/UHF Manual (4th edn).....	£16.85	£14.15
World at Their Fingertips.....	£8.62	£7.33

RSGB logbooks

Amateur Radio Logbook.....	£5.49	£4.67
Mobile Logbook.....	£1.37	£1.16
Receiving Station Logbook.....	£4.46	£3.79

RSGB maps, charts and lists

Great Circle DX Map.....	£3.21	£2.73
HF Awards List and countries List.....	54p	46p
IARU Region 1 Beacon List.....	44p	37p
Locator Map of Europe (wall).....	£2.17	£1.64
Locator Map of Europe (card for desk).....	79p	67p
Locator Map of Western Europe (wall).....	£3.40	£2.69
Locator Map of Western Europe (card).....	£3.91	£3.22
Smith Charts, pad of 25 (Chartwell D7510).....	£3.29	£2.60
Software Register.....	£1.18	£1.00
UK Beacon List.....	44p	37p
UK Repeater List.....	56p	46p
World Prefix map in full colour (wall).....	£3.38	£2.67

RSGB members' sundries (members only)

RSGB badge car sticker.....	—	81p
RSGB belt (real leather).....	—	£10.88
RSGB tie (calico, maroon, green or blue—please state).....	—	£4.50
RSGB logo rubber stamp.....	—	£3.32
RSGB t-shirts (medium, large, ex large—please state).....	—	£5.15
RSGB Green Book (details structure, organisation and objectives of the Society).....	—	£2.82
Standard callign lapel badge (Five weeks' delivery).....	—	£2.85
De-Luxe callign lapel badge (Five weeks' delivery).....	—	£3.34
Standard lapel badge (RSGB emblem, pin filling).....	—	£1.36
Mini lapel badge (RSGB emblem, pin filling).....	—	91p
Members' headed notepaper (50 sheets) quarto.....	—	£2.61
Members' headed notepaper (50 sheets) octavo.....	—	£2.19

Miscellaneous

Callign rubber stamp.....	£5.48	£4.68
Car Sticker "Amateur radio" (two colours).....	81p	69p
Car sticker "I love amateur radio".....	£1.14	97p
Car sticker "I'm on the air with amateur radio".....	93p	79p
Car sticker "I'm monitoring -5 are you?" (two colours).....	81p	69p
Radio Communication back issues.....	£1.47	£1.25
Radio Communication bound volume, 1984.....	£22.68	£19.29
Radio Communication bound volume, 1985.....	£22.69	£19.29
Radio Communication bound volume, 1986.....	£22.69	£19.29
Radio Communication Eastbinder.....	£9.04	£7.68
RSGB collect mug (plastic).....	£2.93	£2.49
RSGB hi contest log sheets (100).....	£3.67	£3.29
RSGB vhf contest log sheets (100).....	£3.67	£3.29

Other publications

All about Cubical Quad Antennas (RPI).....	£8.11	£6.89
All About Vertical Antennas (RPI).....	£11.35	£9.65
Amateur Radio Computer Networking Conference Papers Vols 1-4 (ARRL).....	£24.95	£21.21
Amateur Radio Computer Networking Conference Papers Vol 5 (ARRL).....	£12.85	£10.92
Amateur Radio Satellites—The First 25 years (Amsat UK).....	£4.07	£3.48
Amateur Television Handbook (revised) (BATC).....	£3.41	£2.90
Antenna Compendium vol 1 (ARRL).....	£13.33	£11.33
Antenna Notebook W1FB (ARRL).....	£11.70	9.95
ARRL Antenna Book (ARRL).....	£11.85	£10.07
ARRL Operating Manual.....	£20.47	£17.40
AX25 Amateur Packet Radio Link-layer Protocol (ARRL).....	£9.73	£8.27
Basic Radio Electronics (Tab).....	£20.60	£17.51
Beam Antenna Handbook (RPI).....	£10.87	£9.24
Better Short Wave Reception (RPI).....	£7.85	£6.76
Care and Feeding of Power Grid Tubes (Varian).....	£12.12	£10.30
CMOS Cookbook (Sams).....	£17.99	£15.29
Complete DX'er (Idiom).....	£10.47	£8.80
Complete Shortwave Listener's Handbook (Tab).....	£19.94	£18.95
DX Edge (in propagation aid).....	£21.07	£17.81
DX Power: Effective Techniques.....	£13.31	£11.31
FCC Rule Book (ARRL).....	£7.32	£6.22
First Steps in Radio (ARRL).....	£7.23	£6.15
Full-F012 Technical Handbook (Amsat-UK).....	£7.12	£6.05
Guide to Oscar Operation (Amsat-UK).....	£2.58	£2.18
History of QRP (Millwatt Books).....	£13.18	£11.20
Interface Handbook (RPI).....	£12.47	£10.80
International VHF FM Guide (G3UHK/G3BAUJ).....	£5.18	£4.40
Joy of QRP (Adrian Weiss, W0RSP).....	£13.76	£11.70
Linear Op-Amp Handbook (Carr).....	£24.91	£21.17
Low Band DXing (ARRL).....	£12.65	£10.75
Micro and Television Projects (BATC).....	£6.50	£5.53
Microcomputers in Amateur Radio (Tab).....	£11.75	£9.99
Microwave Communication Handbook (Wiley).....	£17.08	£14.50
Morse Code, the Essential Language (ARRL).....	£8.11	£5.19
Oscar 10 Handbook (Amsat-UK).....	£6.06	£5.15
Packet Radio Handbook (Tab).....	£17.35	£14.75
Passport to World Band Radio 1988 (RDI).....	£19.12	£16.25
QRP Notebook (ARRL).....	£5.25	£4.48
Radio Amateurs Antenna Handbook (RPI).....	£8.15	£7.78
Radio Amateur Callbook International Listings 1988 (RACI).....	£29.41	£25.00
Radio Amateur Callbook North American Listings 1988 (RACI).....	£29.41	£25.00
Radio Amateur DX Guide (RACI).....	£5.18	£4.40
Radio Amateurs' Handbook 1988 (ARRL).....	£29.12	£24.75
Radio Amateur Map of North America (RACI).....	£4.30	£3.68
Radio Communication Receivers (Tab).....	£18.74	£15.93
Radio Frequency Interference (ARRL).....	£4.88	£4.13
RTTY Awards (BARTG).....	£9.24	£7.85
RTTY the Easy Way (BARTG).....	£8.30	£5.38
Satellite Experimenters' Handbook (ARRL).....	£12.65	£10.75
Simple Low-cost Wire Antennas (RPI).....	£11.08	£9.42
Slow Scan Companion (BATC).....	£5.00	£4.25
Software for Amateur Radio (Tab).....	£19.00	£16.15
Solid State Design for the Radio Amateur (ARRL).....	£14.38	£12.22
Towards the Radio Amateurs' Examination (Stern).....	£7.59	£6.45
Towers International Transistor Selector.....	£19.29	£16.40
Transmission Line Transformers (ARRL).....	£13.59	£11.55
Tune in the World with Ham Radio (ARRL).....	£6.79	£5.77
TV for Amateurs (BATC).....	£2.91	£2.47
UHF Compendium Parts 1 & 2 (Weiner).....	£24.71	£21.00
Understanding Amateur Radio (ARRL).....	£7.61	£6.47
USA Licence Manual—Advanced Class (ARRL).....	£8.32	£5.37
USA Licence Manual—Extra Class (ARRL).....	£8.32	£5.37
USA Licence Manual—Technician Class (ARRL).....	£6.32	£5.37
VHF Handbook for Radio Amateurs (RPI).....	£14.40	£12.24
World Ailes (ARCI).....	£5.85	£5.07
Yagi Antenna Design (ARRL).....	£19.00	£16.15
25 Fun to Build projects for Learning Electronics Theory.....	£10.00	£6.50
99 Test Equipment Projects You Can Build.....	£17.08	£14.52

Interference suppression filters

Balldropper filter.....	£6.78	£5.76
Ferrite toroid (pack of two).....	£3.14	£2.67
High-pass filter for fm broadcast Band 2.....	£7.70	£6.55
High-pass filter for uhf iv.....	£7.47	£6.35
Kil of 11 different filter types.....	£31.00	43.35
Notch filter tuned to 50MHz.....	£7.70	£6.55
Notch filter tuned to 70MHz.....	£7.70	£6.55
Notch filter tuned to 145MHz.....	£7.70	£6.55
Notch filter tuned to 435MHz.....	£6.78	£5.76

ORDERING INFORMATION

NON MEMBERS. Use left-hand price columns. Note that members' sundries are only available to members of RSGB.

MEMBERS. Use right-hand price columns. It is essential that you quote your call sign or BRZ number so that you can be recognised as a member.

PRICES. These include postage, packing and VAT where applicable, and are subject to change without notice. For airmail despatch, please ask for price before ordering. Goods are obtainable, less p & p, at RSGB headquarters between 10am and 4pm, Monday to Friday.

POSTAL TERMS. Cash with order. Stamps and book tokens cannot be accepted. Cheques and postal orders should be crossed and made payable to "Radio Society of Great Britain". Our Giro account number is 5335255. Please write your name and address clearly on the order, and allow up to 28 days for delivery.



*Items marked with an asterisk may not be available immediately; please telephone before ordering to confirm availability. Members visiting HQ are advised to telephone first to confirm availability of goods.

ORDER FROM: RSGB Publications (Sales), Lambda House, Cranborne Road, Potters Bar, Herts EN6 3JE

	Non-members' price	Members' price
Language and more instruction aids		
Radio Amateurs Conversation Guide	£7.12	£5.05
Dutch supplement to Conversation Guide	£1.41	£1.20
French cassette supplement to Conversation Guide	£5.77	£4.90
German cassette supplement to Conversation Guide	£5.77	£4.90
Russian cassette supplement to Conversation Guide	£5.77	£4.90
RSGB Morse instruction tape (to Swpm)	£5.04	£4.28
MAGAZINE SUBSCRIPTIONS		
QST (including ARRL membership):		
One year—surface mail	£27.94	£23.75
Two years—surface mail	£53.37	£45.36
Three years—surface mail	£79.52	£67.58
One year—air (KLM) W Europe only	£88.24	£75.00
Ham Radio Magazine, one year, by air	£37.47	£31.85
NEWSLETTER SUBSCRIPTIONS†		
Connect International (monthly)	£9.35	£7.95
DX News Sheet (weekly)	£21.77	£18.50
Microwave Newsletter (10 issues per year)	£7.94	£6.75
VHF/UHF Newsletter (monthly)	£9.35	£7.95
RAYNET SUPPLIES		
Raynet badge—embroidered	£1.04	88p
Raynet badge—lepel	89p	76p
Raynet badge clip	50p	43p
Raynet car sticker—circular	65p	55p
Raynet car sticker—diamond	65p	55p
Raynet identification sticker	51p	43p
Raynet Manual (1986 edition)	£3.41	£2.90
Raynet poster	88p	83p
Raynet tie	£5.83	£4.98
MICROWAVE COMPONENTS		
Capacitors		
4.7pF chip capacitor (pack of 10)	£1.30	£1.11
10pF chip capacitor (pack of 10)	£1.30	£1.11
22pF chip capacitor (pack of 10)	£1.30	£1.11
100pF chip capacitor (pack of 10)	£1.08	92p
470pF chip capacitor (pack of 10)	£1.28	£1.09
1000pF chip capacitor (pack of 10)	£1.08	92p
10nF chip capacitor (pack of 10)	£1.28	£1.09
100nF chip capacitor (pack of 10)	£1.41	£1.20
Trimmer, Type TZ03Z2R3ER1 10 (each)	99p	84p
Crystals		
94.866MHz crystal HC18U	£9.03	£7.68
Exciters		
GOHM32 24GHz doppler module	£70.58	£59.99
Hardware, pcbs and laminates		
1.52MHz loc osc source pcb (RC2-3/87)	£5.40	£4.59
CBT-40 mounted terminal block, 40W, 5011	£22.28	£18.95
CBT-40 mounted terminal block, 40W, 1001	£22.99	£18.95
Cu Clad 233 pcb, 5mm, 2 by 1in block	99p	84p
Cu Clad 233 pcb, 31mm, 2 by 1in block	£99p	84p
Regulator pcb (RC 10/81)	£2.50	£2.13
UHF source pcb (RC 10/81)	£7.06	£6.00
WG20 copper waveguide (per foot)	£7.14	£6.07
Resistors		
51Ω chip resistor (pack of 10)	83p	71p
100Ω chip resistor (pack of 10)	83p	71p
Semiconductors		
1N415E point contact mixer diode	£7.44	£6.32
OC1501E mixer	£14.39	£12.23
MD4901 SRD	£33.51	£28.48
MGF-1 402 GaAs fet	£28.60	£24.31
MSA0104 monolithic ic	£5.03	£4.28
MSA0204 monolithic ic	£5.24	£4.45
MSA0304 monolithic ic	£5.42	£4.61
MSA0404 monolithic ic	£6.79	£5.77
UPB581C 2.6GHz divide by 2 prescaler	£1.243	£1.057
UPB582C 2.6GHz divide by 4 prescaler	£1.243	£1.057

†Newsletter subscription rates shown are those for delivery to the UK and EEC countries. For rates to other overseas destinations please contact the Circulation Department at RSGB Headquarters.

MORE NEW TITLES

PASSPORT TO WORLD BAND RADIO

If you are interested in listening to the shortwave spectrum outside the amateur bands then the 1988 edition of *Passport To World Band Radio* is for you. This book lists all the shortwave broadcast stations in the world by frequency from Korea on 2,300kHz to Norway on 25,730kHz. For each entry is given the transmitter site, time of transmissions, transmitter power, target area, language of broadcasts and much more useful information. All this is shown together in graphical form for easy reference. No more searching through pages of lists to find the information you need.

This book is not just a guide to broadcast stations, however. In addition there are brief reviews of no less than 60 different shortwave broadcast receivers, and full-length reviews of 14 recent models. Useful tips are also given on what to look for when purchasing a shortwave receiver. There are also 12 feature articles covering a wide range of shortwave broadcast listening and a useful glossary of terms used throughout the book.

Four Sections: How to tune in the world; 1988 Buyers Guide to World Band Radio; World Scan; Lexicons and Guides.

400 pages; paperback; 1988; £16.25 to RSGB members by post

W1FB's ANTENNA NOTEBOOK

W1FB's Antenna Notebook is the latest antenna book from ARRL. As its title implies, this book is a collection of practical ideas, and features simple, general purpose antennas without going into extensive antenna theory. The book also dispels a number of common fallacies regarding SWR and baluns.

Chapter titles: Some fundamental antenna data; Building and using dipole antennas; Single-wire antennas; Simple vertical antennas; High-performance wire antennas; Limited-space and invisible antennas; Matching techniques; Special receiving antennas; Simple antenna measurements.

130 pages; paperback; 1987; £9.95 to RSGB members by post

ARRL HANDBOOK

Don't forget that the latest 1988 edition of the *ARRL Handbook* is now available. This world-renowned reference book, now in its 65th year, should be in the shelf of every radio amateur. Just look at what it contains...

Chapter titles: Amateur radio; Electrical fundamentals; Radio design technique and language; Solid state fundamentals; Vacuum tube principles; Power supplies; Audio and video; Digital basics; Modulation and demodulation; Radio frequency oscillators and synthesizers; Radio transmitting principles; Radio receiving principles; Radio transceivers; Repeaters; RF power amplifiers; Transmission lines; Antenna fundamentals; Voice communications; Digital Communications; Image Communications; Special modulation techniques; Radio frequencies and propagation; Space communications; Construction techniques; Test equipment and measurements; Troubleshooting and repair; Power supply projects; Audio and video equipment; Digital equipment; HF radio equipment; VHF radio equipment; UHF radio equipment; Antenna projects; Station accessories; Component data; How to become a radio amateur; Assembling a station; Operating a station; Monitoring and direction finding; Interference. Plus printed circuit board etching patterns, abbreviations list, and comprehensive index.

1,188 pages; hardback; 1988; £24.75 to RSGB members by post



SPECTRUM COMMUNICATIONS

MANUFACTURERS OF RADIO EQUIPMENT AND KITS

FM CONVERSION

FOR YAESU AND KENWOOD (TRIO) TRANSCEIVERS

FD311X RECEIVE BOARD **£52.50**

FM2000 TRANSMIT BOARD **£18.50**

(for rigs with AM)

FM3000 TRANSMIT BOARD **£18.50**

(for CW/SSB only rigs)

STATE RIG TYPE WHEN ORDERING,
OR WE'LL FIT THEM £44.00 EXTRA,
INC. SECURICOR CARRIAGE.

TRANSCEIVER CONVERTERS separate receive and transmit converters in single boxed unit. Clean 2.5W output. 10m drive 10mW to 200mW versions TRX2-10H TRX 4-10H, and TRX 6-10H. Boxed kit £60. Boxed built and tested £99.50. 2m drive 0.5-5W versions TRX 4-10I and TRX 6-10I. Boxed kit £68. Boxed built and tested £115.

TRANSMIT AMPLIFIERS. linear two stage 0.5W IN 20/30W out unswitched, suitable for MEON. Types TA2U2, TA4U2, and TA6U2. PCB Kit £41.25. PCB built £52.50. Boxed kit £45. Boxed built £59.25. Switched version for use with TRC's. Types TA2S2, TA4S2, TA6S2. PCB Kit £47. PCB built £60. Boxed Kit £58.25. Boxed built £72.50.

TRANSMIT AMPLIFIERS. linear single stage, gain 10dB, 30W transmit output. Ideal for FT290, FT690, etc., RF switched and DC sensing. Types TA2S1, TA4S1, and TA6S1. PCB Kit £33. PCB built £40.25. Boxed kit £39. Boxed built £49.50.

VAT & P&P INC PRICES

Delivery within 14 days subject to availability, 24 hr answering.



UNIT B6, MARABOUT INDUSTRIAL ESTATE,
DORCHESTER, DORSET. TEL: 0305 62250



LOSING DX?

ANTENNA FAULT? Poor reports? Not getting out?

CHECK FAST with an ANTENNA NOISE BRIDGE, measure RESONANCE 1-160MHz and RADIATION RESISTANCE 2-1000 ohms, only £26.20, get ANSWERS and MORE DX.

ATOMIC TIME! MSF CLOCK is EXACT - never gains or loses, SELF SETTING at switch-on, 8 digits show Date, Hours, Minutes and Seconds, ALSO parallel BCD output, decodes Rugby 60KHz atomic time signals, 5x8x15cm, built-in antenna, 1000Km range, only £97.90, get the RIGHT TIME.

Each fun-to-build kit (ready-made to order) includes all parts, case, pre-wound coils, instructions, fibre-glass pcb, by-return postage etc and list of other kits.

CAMBRIDGE KITS

45 (RQ) Old School Lane, Milton, Cambridge

TONNA F9FT THE VHF/UHF ANTENNA SPECIALIST

50MHz	5 element	£41.69(a)	435MHz	9 element	£28.62(a)
20505			20909N	19 element	£34.35(a)
144MHz			20919N	19 element crossed	£38.66(a)
20804N	4 element	£27.60(a)	20438	21 element 432MHz	£44.57(a)
20808N	4 element crossed	£34.96(a)	20921N	21 element ATV	£44.57(a)
20809N	9 element fixed	£30.87(a)	20922N		
20809N	9 element portable	£33.12(a)	1296MHz		
20818N	9 element crossed	£57.86(a)	20623	23 element	£30.26(b)
20813N	13 element portable	£46.00(a)	20685	4 x 23 element	£160.00(a)
20817N	17 element	£81.54(a)		power splitter—stacking frame	
144/435MHz			20655	55 element	£46.20(a)
20899N	8819 element Oscar	£57.86(a)	20656	4 x 55 element	£230.00(a)
				power splitter—stacking frame	
			2300MHz		
			20725	25 element	£40.89(b)

All prices include VAT. Please add carriage (a) £5.00, (b) £2.20. ACCESS or VISA cardholders telephone your order. Immediate despatch. Callers welcome but by tel. home appointment only please.

Send 50p for our catalogue which contains full specification of all our antennas, power splitters, etc.

SOLE UK DISTRIBUTOR 12 Conduit Road, Abingdon, Oxon OX14 1DB
RANDOM ELECTRONICS (R) Tel: (0235) 23080 (24 Hours)



K W TEN-TEC LTD

TRANSCEIVERS HF MOBILE WHIPS

CORSAIR II

Helium-filled

ARGOSY II

CENTURY 22

AIRBAND WALKIE-TALKIES

*PARAGON

CAA Approved

LINEAR AMP

TRITON

DUMMY LOADS

MICROPHONES

ANTENNA TUNER FILTERS, REMOTE VFO

MODEL 229A

etc

*We now have many delighted customers using the new PARAGON

K W TRAPS, K W TRAP DIPOLES, BALUNS, ANTENNA SWITCH,
PRECISION MORSE KEYS

LATEST NEWS FROM K W

FRITZEL BALUNS, H.F. BEAMS & VERTICALS NOW IN STOCK

FROM CUSHCRAFT, BUTTERNUT, HYGAIN,

MFJ PACKET RADIO UNITS AND ATU's etc

HYGAIN ROTATORS, VHF BEAMS & VERTICALS

Prices on many products from U.S.A. have been reduced due to favourable rate of exchange (including TEN TEC Equipment and ancillaries).

K W TEN-TEC LTD

(A subsidiary of K W COMMUNICATIONS Ltd)

Vanguard Works

Jenkins Dale, Chatham, Kent ME4 5RT

Tel: (Medway) 0634-815173; Telex: 965834

Ring
557732
BRISTOL

STD
0272



Radio Communications
Amateur P.M.R. Moline



UPPINGTON

Aerial Rotators

XR400	Med/Hi duty	131.85(£350)
XR500	6 core Elevation	149.95(£350)
XR420RC	5 core Medium Duty	169.95(£350)
XR600RC	6 core Heavy Duty	219.00(£350)
KD008	Lower mast clamps	17.45(£200)

2 Element Beams

70 cms	£3.95	P&P 2.50
2 mtrs	£4.25	P&P 2.50
4 mtrs	£10.95	P&P 2.50
6 mtrs	£12.95	P&P 2.50
70 mtrs	£39.85	P&P 3.50

ZL SPECIAL	12ELE	£25.00	P&P	£3.50
TYPE	7ELE	£14.50	P&P	£3.00
ANTENNAS	5ELE	£10.50	P&P	£2.50

THE G5RV

MULTIBAND DIPOLE

FULL SIZE 1/2 SIZE

80-10 MTRS 40-10 MTRS

£16.25 £14.25

+ £2.00 P&P + £2.00 P&P

Jaybeam Appointed Distributor
10/15/20M 3 el mini tribander now available
12-14 Pennywell Road, Bristol BS5 0TJ
Tel: (0272) 557732

21st WHITE ROSE RALLY

SUNDAY, 27th MARCH

The Refectory, University of Leeds, Leeds 2

- ★ Walking distance from Leeds city centre ★
- ★ Talk in on S22 and SU8 ★
- ★ Extensive free parking ★
- ★ Bookstall ★

50p entrance, Children and CAPs free

Rally Manager Mike GOEGM (0532) 676368

ARE COMMUNICATIONS

TS-140S + SIX METRES + TS-680S

160m to 10m, including the 6 metre band. The new Kenwood TS-680S Transceiver is a full feature HF multimode transceiver, with a frequency range of 1.8-56 MHz. Not only does it include the new 6m Amateur band, it also has a general coverage receiver, 100 watts output between 1.8 and 30 MHz and 10 watts output on 6m. All this! And it is only the size of the old TS-440S!

Available now. Price £995.00 including 6 metres.

Compare prices with other "Shady" importers!

A New Standard in Technology The full Duplex Handie from Standard

A World First. Transmit on 2 metres and receive on 70cms (or vice-versa) at exactly the same time.

Not only is that unique from a Handie, but with the following specification and at a fraction of the size of its nearest competitor, is there really any other rig that compares?

- Dual band operation 144-146 and 430-440MHz. Full duplex.
- Receiver coverage: 130-169,995 and 410-470MHz.
- Programmable step sizes 5/10/12.5/25/50KHz.
- 5 watts output on both bands (With optional CNB120).
- Dual synthesised VFO's.
- Programmable class tones 67-250.3Hz (With optional CTD/NS00).
- Programmable Repeater Offset on either band between 0-39.9MHz.
- Reverse Repeater facility.
- Dual Watch priority channel.
- Programmable Call Channel on both bands.
- Ten programmable memories, including repeater offset, tone signals etc, on both bands.
- Four different scanning modes.
- Battery save facility.
- Switchable Frequency lock and TX inhibit, from keyboard.
- Switchable 20dB Attenuator.
- High or Low power control.
- Squelch defeat switch.
- Illuminated Wide Angle LCD display.
- Digital 'S' Meter/Power output display.
- Low battery Warning indicator.
- TX LED indicator.

UP GRADE NOW.
THE NEW STANDARD C-500.
Now available from stock

**NOW ONLY
£369**

WHO'S FOOLING WHO AGAIN?

Yet again the "Winter of Discontent" is blowing through the Dales of Derbyshire.

Uncle Bill and his merry men are moaning because we imported the TS-680S long before they did.

Incidentally, I notice that even they admit not knowing about the RZ1 scanning receiver and we have had it in stock for weeks!!!

But to imply that A.R.E. is in fact a "SHADY IMPORTER" is definitely out of order, since we offer an excellent after sales service for all makes of equipment.

We would suggest, Uncle Bill, that once again you have been *pipped at the post*.

The Last of the FT 726R!

At a "never to be repeated" price, A.R.E. have the very last shipment of the Yaesu FT726R, Triple-band Multimode.

Original list price £999.00 - Price slashed to £699.00!!! (Inc. 2m Fitted). But hurry, stocks are strictly limited. Ring for special prices on 726R Modules.

£699



NEW

Yaesu FT 736R

At last! Yaesu have decided that their VHF/UHF reigning champion, the FT 726R, should be replaced. The new FT 736R has so many advanced features, it would probably take two pages of advertising to list them all! As usual A.R.E. can offer this superb piece of equipment, covering 6m, 2m, 70cm and 23cm Amateur Bands at a huge saving over list price. Please phone for your own special A.R.E. super deal.

London Tel: 01-997 4476 Merseyside Tel: 09252 29881

The New Yaesu FT767GX M

All HF + 2m/6m/70cm + Gen Cov. Multimode, Semi-duplex, Kryer, Tracking 2 VFO's Ten memories, Notch/IF shift, Audio peak Filter, CW filter etc, etc.

Ords are you have seen one or worked someone using one, either on HF or 2m/6m/70cm. The new FT767GX M. We're so impressed, all the licensed operators at A.R.E. have one! We believe we have probably supplied more FT767GX M's than any other retailer. WHY? Our unprintable part-exchange or cash prices - that's why!

Phone now for your special A.R.E. super deal, SAE for colour leaflet.

Plus 2m or 6m module worth £169 fitted free!



NOV AVAILABLE WITH A.R.E. MODS
IMPROVING SYNTHESIZER PERFORMANCE

Opening Hours London Mon/Fri 9.30 to 5.30 Merseyside Tues/Sat 10.00 to 5.00



A.R.E. Communications Limited, 6 Royal Parade,
Hanger Lane, Ealing, London W5A 1ET, England
Professional Tel: 01-997 4476 Fax: 01-991 2565

A.R.E. Communications Limited, 38 Bridge Street,
Earlestown, Newton-Le-Willows, Merseyside WA12 9BA
Amateur Tel: 09252 29881 Fax: 01-991 2565

HF performance you can have a real field day with.

With Yaesu's FT-757GX/II, you can enjoy full-featured HF performance just about anywhere.

On vacation. During field day. On the road. Or in your shack.

Because the FT-757GX/II packs all its HF performance into one highly compact, action-ready case. A case so small, it even fits under airplane seats.

Of course, you've probably noticed a similarity to its predecessor, the FT-757GX. That's purely intentional. And now its performance is even better.

With new features like memory storage of operating mode. Slow/fast tuning selection. Automatic step-change according

to mode. IF notch filter. 10 memories. And VFO to VFO scan.

Plus you get an iambic electronic keyer. Woodpecker noise blanker. 600-Hz CW filter. AM and FM modes. AF speech processor. And 25-kHz marker generator. All at no extra cost.

Three microprocessors. Dual VFOs. Single-button VFO/memory swap. Receive coverage from 500 kHz to 30 MHz. Transmit coverage from 10 to 160 metres, including WARC bands. All-mode coverage (LSB, USB, CW, AM and FM). 100-watt RF output.

QSK operation. Massive heatsink and duct-flow cooling system for continuous RTTY operation for up

to 30 minutes.

Computer Aided Transceiver (CAT) System for computer control via operational interface.

Of course, the FT-757GX/II offers the kind of options you'd expect from Yaesu, too. Including standard and heavy-duty power supplies, automatic antenna tuner, hand and desk microphones.

So no matter where you work the DX, take along Yaesu's FT-757GX/II. The full-featured HF rig you'll have a real field day with.

YAESU



UK Sole Distributor *South Midlands Communications Ltd S.M. House, School Close,
Chandlers Ford Industrial Estate, Eastleigh, Hants SO5 3BY Tel (0703) 255111*

Prices and specifications subject to change without notice.